



FIG. 3
-K POLYAMIDE FILM PAD

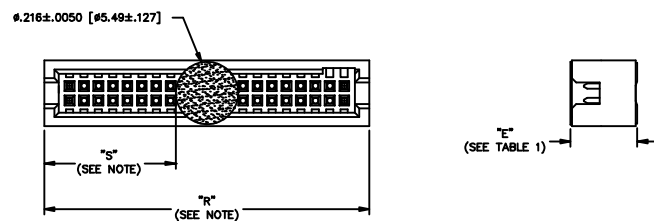

NOTE: "R" = OVERALL LENGTH (REF)
"S" = $\{("R" - .216 [5.49]) / 2\} \pm .020 [.51]$

FIG. 4
-TR TAPE AND REEL

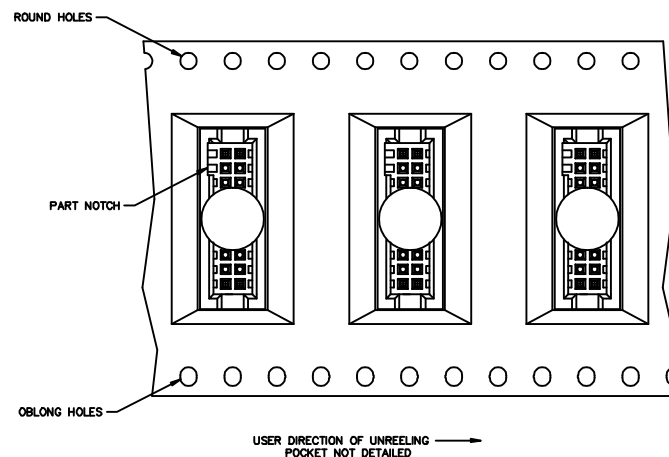

PRECISIONS ARE IN INCHES	UNLESS OTHERWISE NOTED	TOLERANCES ARE	TITLE	DWG NO.
ONE PLACE DECIMALS ±.1 [2.54]	THREE PLACE DECIMALS ±.005 [1.3]	ANGLES ±2°	.050 x .050 TERMINAL STRIP	TFC-1XX-XX-XX-D-XX SHEET 2 OF 3
TWO PLACE DECIMALS ±.01 [25]	FOUR PLACE DECIMALS ±.0020 [.05]			

FIG. 5
-A OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

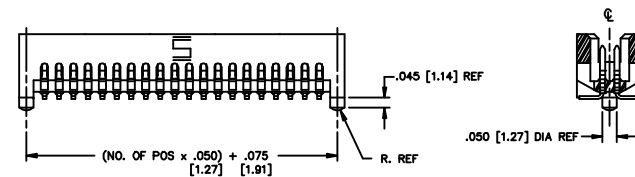


FIG. 6
-LC OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1
(STYLE -02 SHOWN)


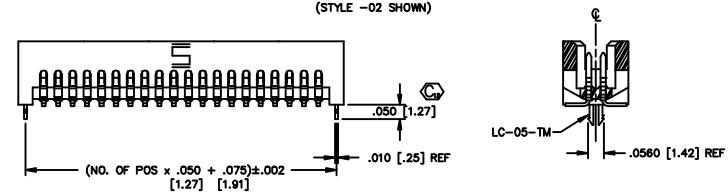


FIG. 7
-P PICK & PLACE PAD

DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1
(PAD TO BE POSITIONED ON C.L. AS SHOWN)

* NOTCH ON PAD FOR 10 POSITION OR LESS TO
BE ON THE SAME END AS THE NOTCH IN THE TFC BODY

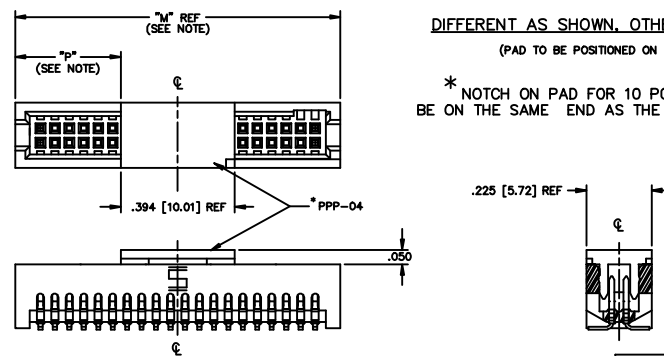

NOTE: "M" = (No OF POS x .050 [1.27]) + .125 [3.18]
"P" = $\{("M" - .394 [10.01]) / 2\} \pm .020 [.51]$