



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

TIP29,A,B,C(NPN) TIP30,A,B,C(PNP)

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Marking: Type Number
- $R_{th(jc)}$ is 4.167°C/W , $R_{th(ja)}$ is 62.5°C/W
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

Maximum Ratings

Symbol	Rating		Rating	Unit
V _{CEO}	Collector-Emitter Voltage	TIP29, TIP30	40	V
V _{CBO}	Collector-Base Voltage	TIP29A, TIP30A	60	
		TIP29B, TIP30B	80	
		TIP29C, TIP30C	100	
V _{EB}	Emitter-Base Voltage		5.0	V
I _C	Collector Current- Continuous Peak ⁽¹⁾		1.0 3.0	A
I _B	Base Current-Continuous		0.4	A
P _D	Total power dissipation @T _C =25°C Derate above 25°C		30 0.24	W W/°C
T _J	Junction Temperature		-55 to +150	°C
T _{STG}	Storage Temperature		-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS

$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage ^(note 2) ($I_C=30\text{mA}$, $I_B=0$)	TIP29, TIP30 TIP29A, TIP30A TIP29B, TIP30B TIP29C, TIP30C	40 60 80 100	---	Vdc
I_{EBO}	Emitter-Base Cutoff Current ($V_{EB}=5.0\text{Vdc}$, $I_C=0$)		---	1.0	mA
I_{CES}	Collector Cutoff Current ($V_{CE}=40\text{V}$, $V_{EB}=0$) ($V_{CE}=60\text{V}$, $V_{EB}=0$) ($V_{CE}=80\text{V}$, $V_{EB}=0$) ($V_{CE}=100\text{V}$, $V_{EB}=0$)	TIP29, TIP30 TIP29A, TIP30A TIP29B, TIP30B TIP29C, TIP30C	---	200 200 200 200	μA
I_{CEO}	Collector Cutoff Current ($V_{CE}=30\text{Vdc}$, $I_B=0$) TIP29, TIP29A, TIP30, TIP30A ($V_{CE}=60\text{Vdc}$, $I_B=0$) TIP29B, TIP29C, TIP30B, TIP30C		---	0.3 0.3	mA

ON CHARACTERISTICS⁽²⁾

$h_{FE(1)}$	DC Current Gain ($I_C=0.2\text{A}$, $V_{CE}=4.0\text{Vdc}$) ($I_C=1.0\text{A}$, $V_{CE}=4.0\text{Vdc}$)	40 15	---	75	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=1.0\text{A}$, $I_B=125\text{mA}$)	---	0.7		Vdc
$V_{BE(ON)}$	Base-Emitter On Voltage ($I_C=1.0\text{A}$, $V_{CE}=4.0\text{Vdc}$)	---	1.3		Vdc
f_T	Current-Gain-Bandwidth Product ^(note 3) ($I_C=200\text{mA}$, $V_{CE}=10\text{Vdc}$, $f=1.0\text{MHz}$)	3.0	---		MHz
h_{fe}	Small-Signal Current Gain ($I_C=0.2\text{A}$, $V_{CE}=10\text{Vdc}$, $f=1.0\text{kHz}$)	20	---		---


Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

2. Pulse Test: Pulse Width=300us, Duty Cycle <2.0%

3. $f_T = |h_{fe}| \times f_{test}$

1.0 Amp Complementary Silicon Power Transistors

TO-220

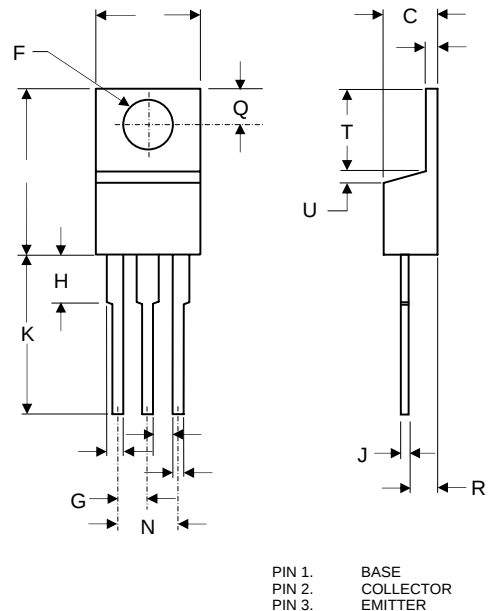

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	Ø
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	---	.050	---	1.27	
V	.045	---	1.15	---	

TIP29,A,B,C(NPN) TIP30,A,B,C(PNP)

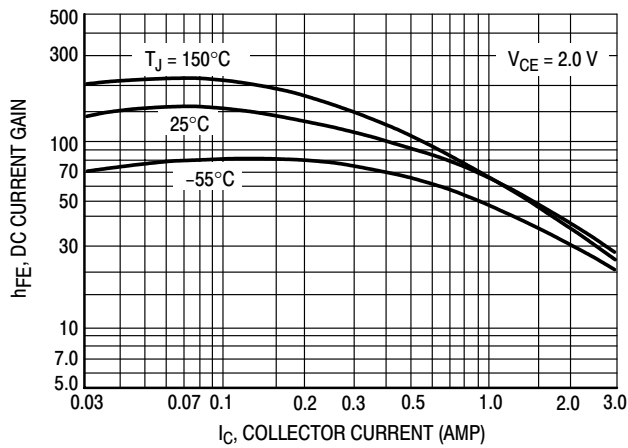


Figure 1. DC Current Gain

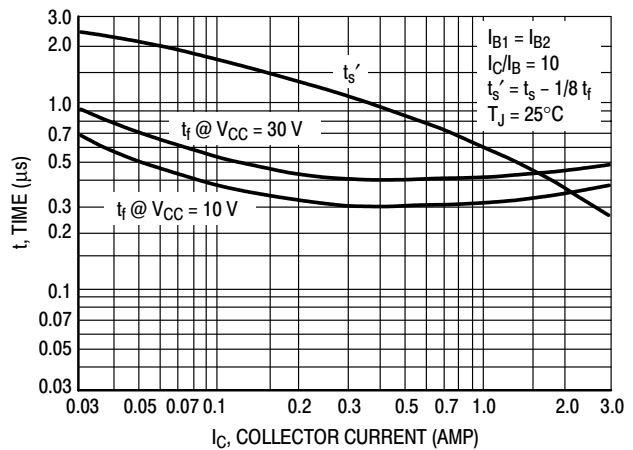


Figure 2. Turn-Off Time

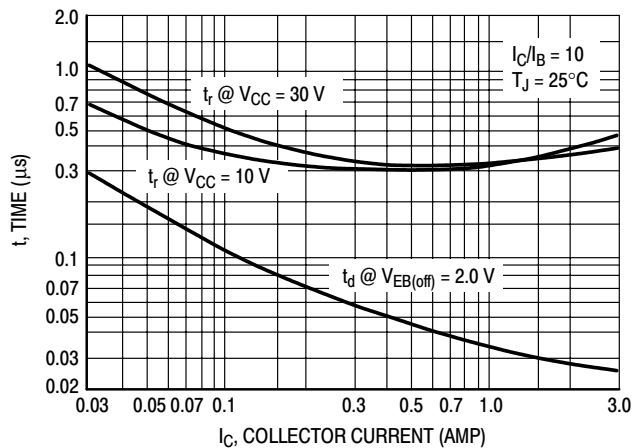


Figure 3. Turn-On Time

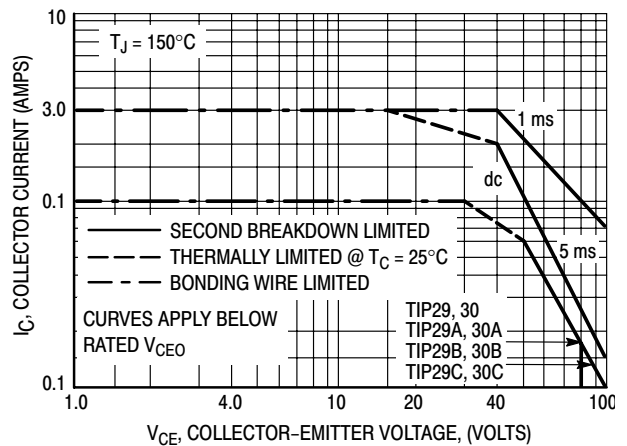


Figure 4. Active Region Safe Operating Area

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.