

[<-- back](#)

## MODEL TL-2100


International size reference : AA, ER14505

### TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)


Nominal capacity @ 2mA TO 2V	2.1Ah
Rated voltage	3.6V
Maximum continuous current	100mA
Maximum pulse current capability	200mA
Rated 1 sec. pulse capability (to 3V)	40mA
Weight	17.4g (0.615oz.)
Operating temperature range	-55°C to +85°C

U.L. Component recognition MH 12193

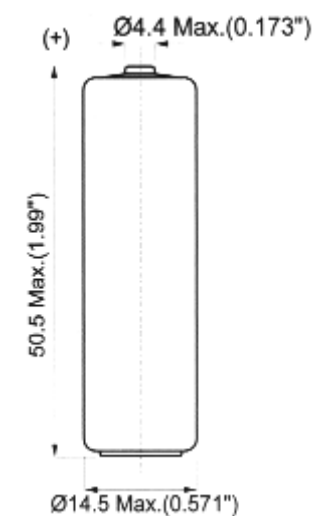


### AVAILABLE TERMINATIONS

SUFFIX- /S	STANDARD
SUFFIX- /P	AXIAL PINS
SUFFIX- /T	SOLDER TABS
SUFFIX- /PT2	RADIAL PINS

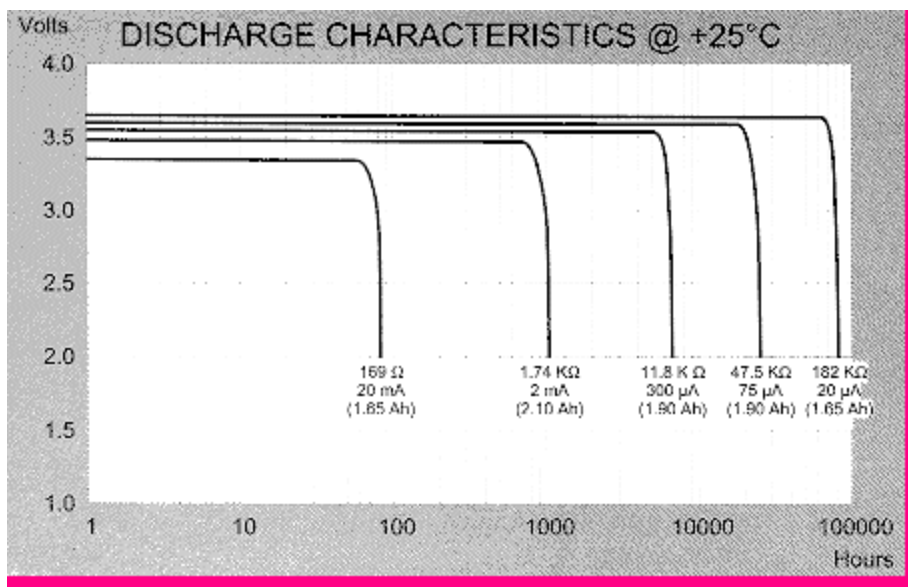

SUFFIX- /PT/TP	POLARIZED TABS
-------------------	-------------------

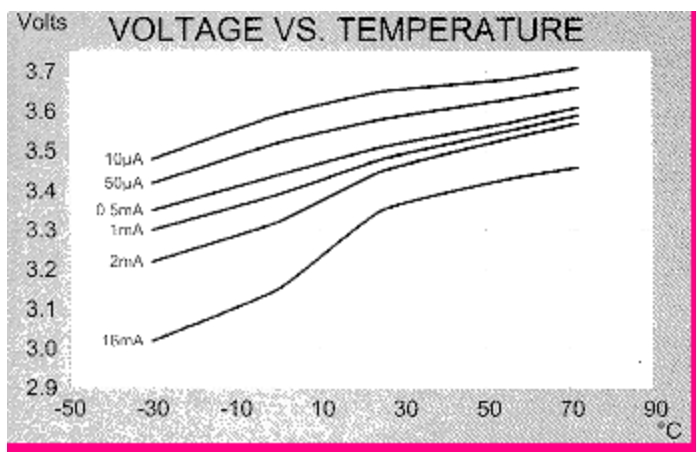

**LITHIUM XTRA**

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

