

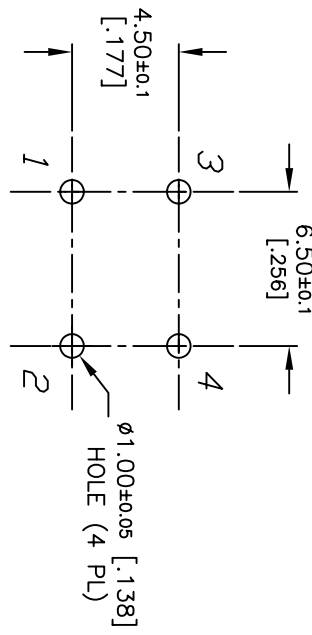




RECOMMENDED P.C.B. LAYOUT


SCALE 3:1

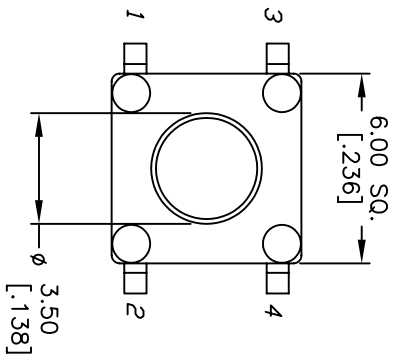

CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. OPERATING FORCE: 250 ± 50 gf
6. TRAVEL: 0.25 ± 0.1 mm
7. CONTACT RESISTANCE: 100 mILLI-OHMS Max.
8. DIELECTRIC STRENGTH: 250V RMS min.
9. INSULATION RESISTANCE: 1000 Mega-OHMS min.
10. ELECTRICAL LIFE: 100,000 CYCLES min.
11. ▲ DESIGNATE MAJOR FEATURE:
- ▲ 12. 2002/95/EC (ROHS) COMPLIANT

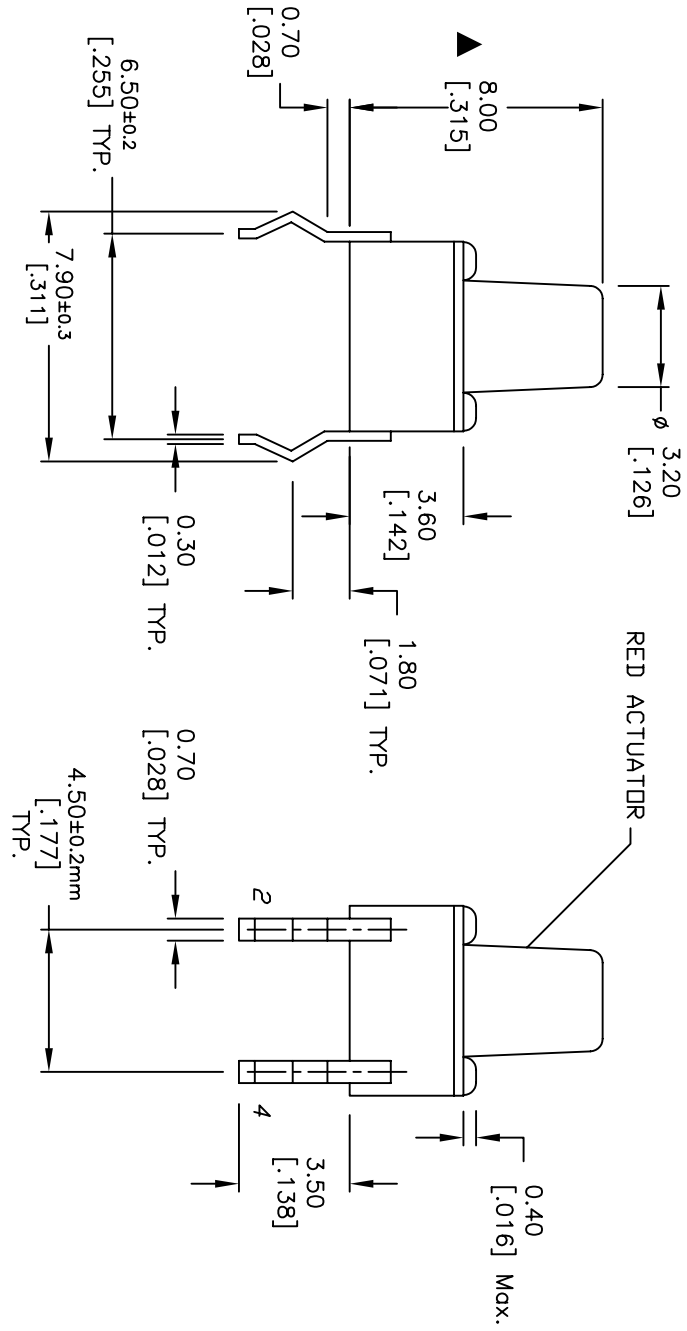

D	17248	FIXED FORCE NOTE	5/3/07	TN	TITLE			
C	12190	REVISED AND REDRAWN	5/28/02	CJB	TL1105CF2500			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			4:1	5/3/07	TN	P010014
								REV
								D