



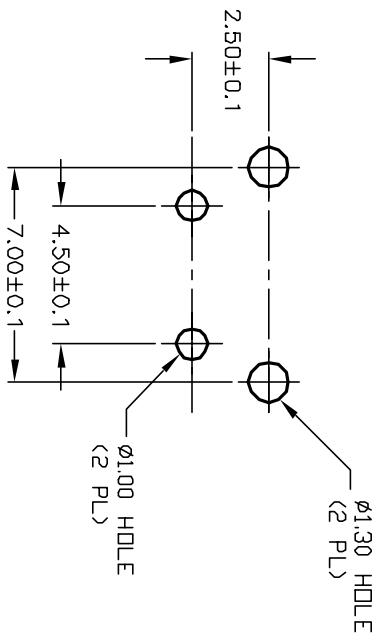



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X= ± 0.4
X.XX= ± 0.25
3. TERM. NDS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: 0.25 ± 0.1 mm
6. OPERATING FORCE: 160 ± 50 gf
7. CONTACT RESISTANCE: 100 milliohms Max.
8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
9. DESIGNATE MAJOR DIMENSIONS
10. MATERIAL: PPS (STEM & BODY)

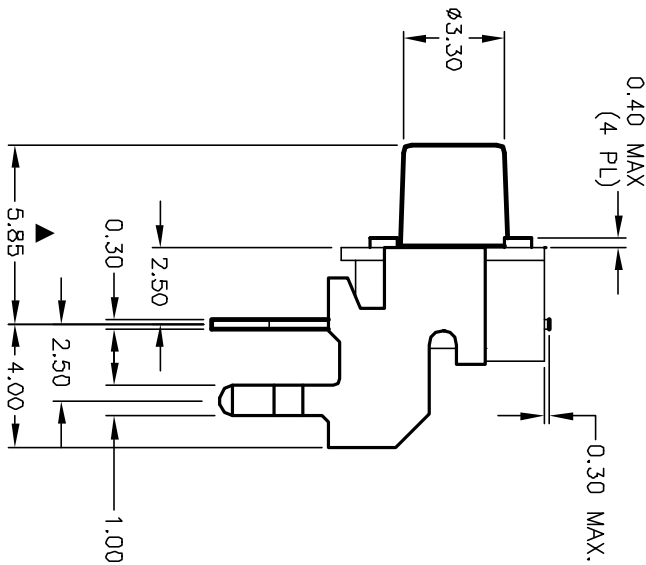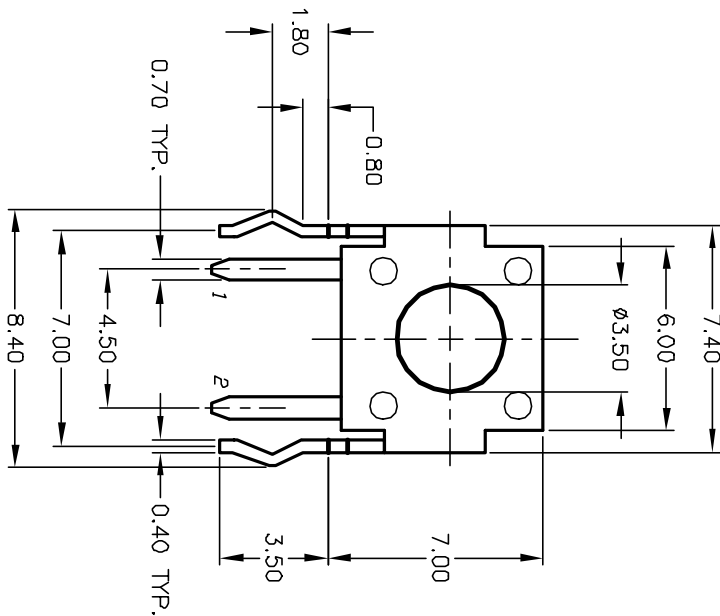

TITLE				E-SWITCH®			
B	11842	REVISED AND REDRAWN	11/27/01	CJB	TL 1105 X F160 Q (STD BRACKET)		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					4:1	11/27/01	CJB
							DWG
							P020221
							REV
							B