




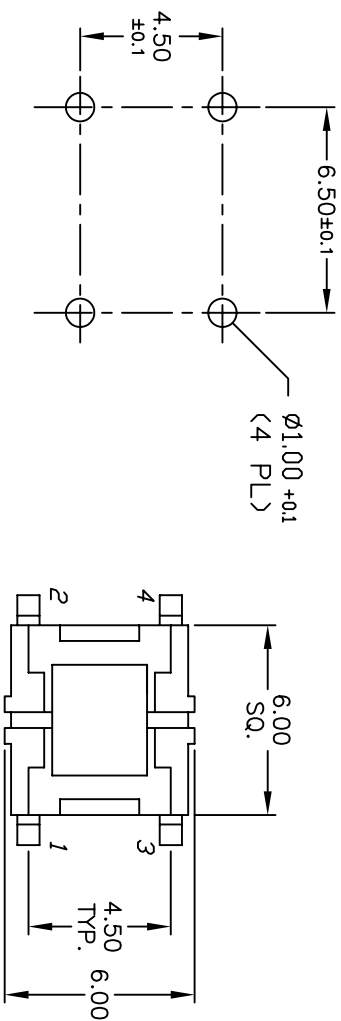


RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

CONTACT CONFIGURATION

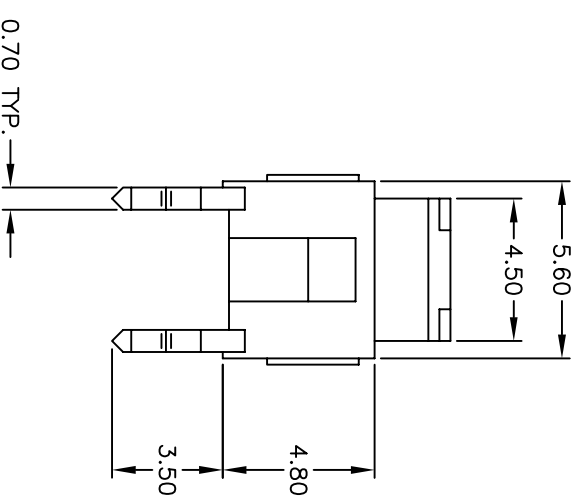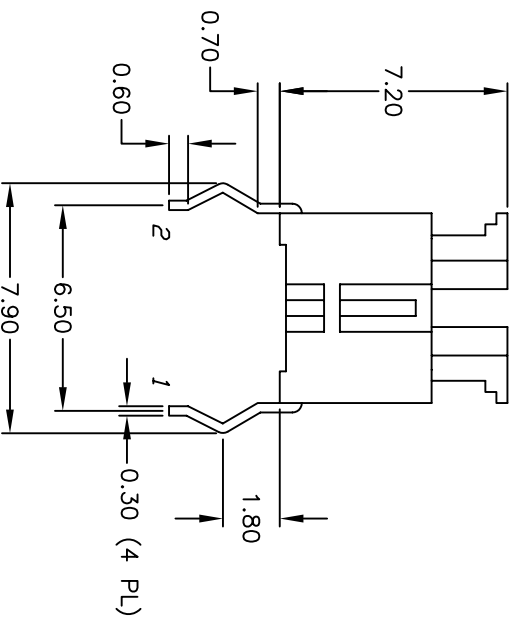

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 50mA, 12VDC
4. CONTACT MATERIAL: Silver
5. TRAVEL: 0.25 +0.2/0.1mm
6. OPERATING FORCE: 160±50gf
7. CONTACT RESISTANCE: 100mILLI—Ohms Max
8. 2002/95/EC (ROHS) COMPLIANT

D	15281	REV. DESCRIPTION, ROHS NOTE	9/14/05	PH
C	11324	REVISED PART DESCRIPTION	7/20/01	CJB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®				
TITLE				
TL1240NQ				
SCALE	DATE	DR	DWG	REV
4:1	7/30/01	CJB	P010330	D