





RECOMMENDED P.C.B. LAYOUT






CIRCUIT: 2PDT

SWITCH FUNCTION	
POS 1	POS 2
2-1,5-4	2-3,5-6

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A @30V DC
5. TRAVEL: TRAVEL:=2.50±0.38
LOCK=1.34±0.38
6. OPERATING FORCE:180±50gf
7. CONTACT RESISTANCE: 50mILLI-Ohms MAX. Initially
8. ELECTRICAL LIFE (at Full Load):
10,000 Cycles Make & Break
- ▲ 9. DESIGNATE MAJOR FEATURE:

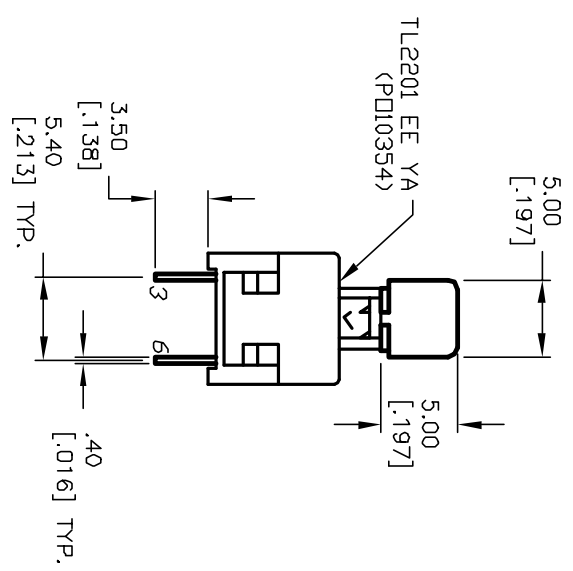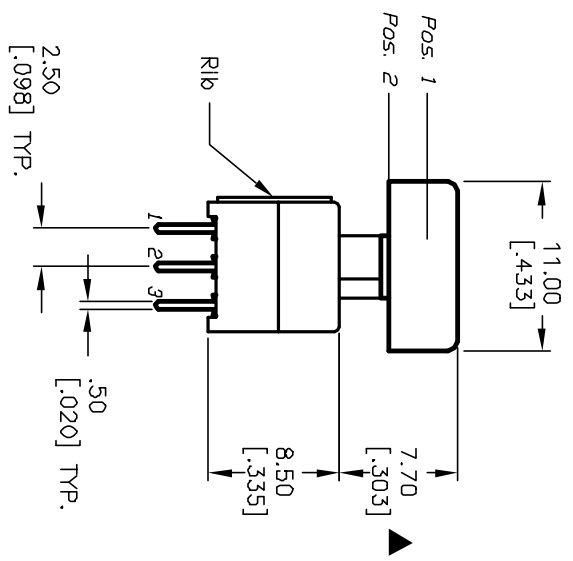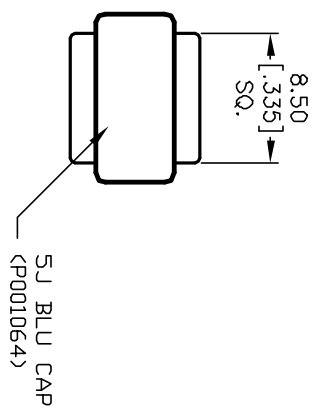

TITLE		SCALE		DATE		DR		DWG		REV	
TL2201 EE Y A /5JBLU (LATCHING)		2:1		9/05/01		CB		XP0190A		A	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											
REV.		ECN No.		DATE		CHKD					
A		11642		9/05/01		CB					
RELEASED FOR PRODUCTION		DESCRIPTION		DATE		CHKD					

E-SWITCH®