




RECOMMENDED P.C.B. LAYOUT

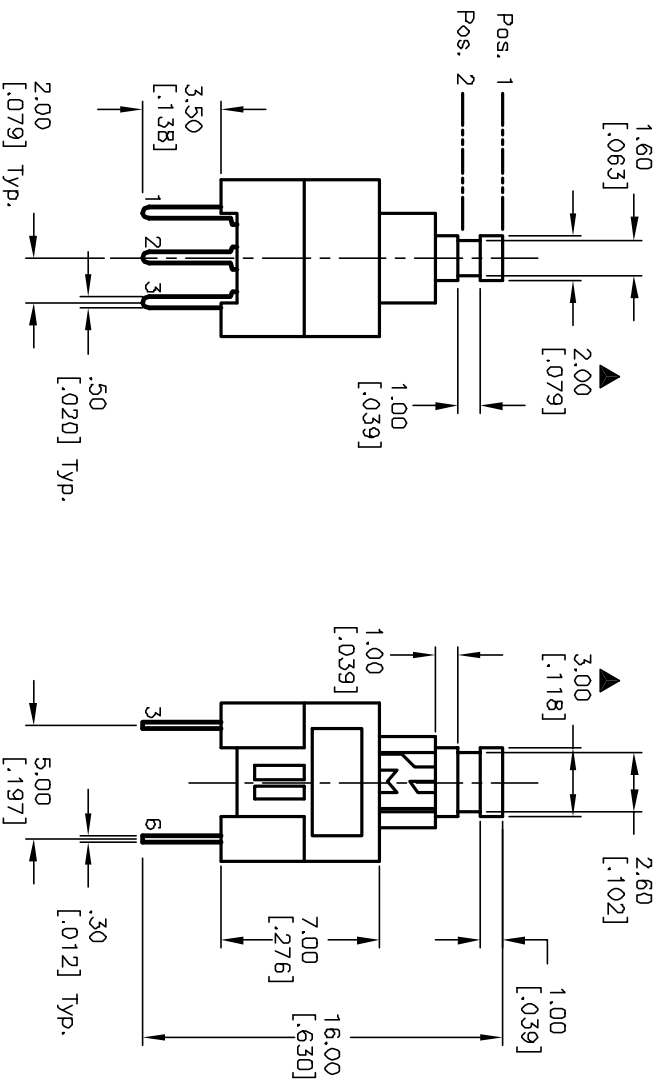
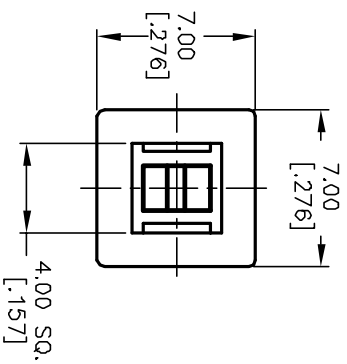
SWITCH FUNCTION		
CONNECTED TERM. #	FUNCTION	
2-1,5-4	NORMALLY CLOSED	POS. 1
2-3,5-6	NORMALLY OPEN	POS. 2
2,5	COMMON	



CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A @30V DC
6. TIMING: Non-Shorting
7. TRAVEL: Full: 1.8mm, Lock: 1.0mm
8. OPERATING FORCE: 200 $\pm$ 50gf.
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE & BREAK
CYCLES AT FULL LOAD.
10. DESIGNATE MAJOR.

**E-SWITCH®**

CYCLES AT FULL LOAD.			
▲ 10. DESIGNATE MAJOR.			
A	11627	RELEASED FOR PRODUCTION	8/27/01 CB
REV.	ECN NO.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
TITLE			
TL 2230 □A F200 (MOMENTARY)			
SCALE	DATE	DR	DWG
3:1	8/27/01	CB	D310409
REV			
A			