

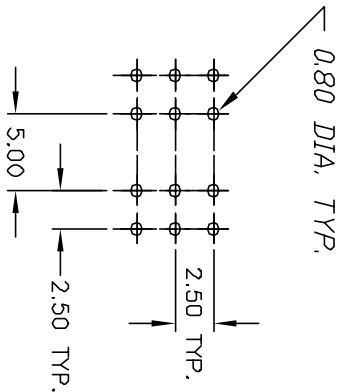
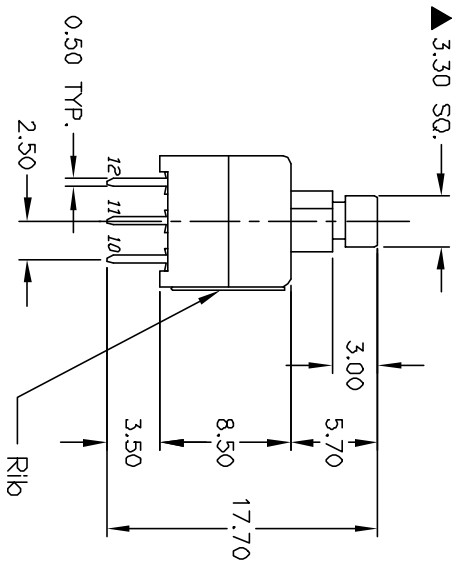
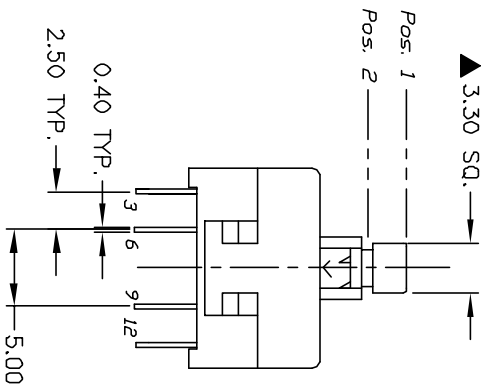


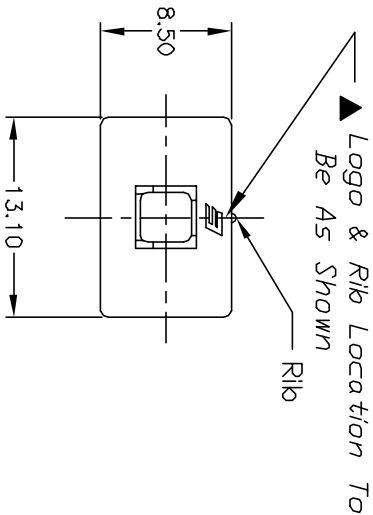

RECOMMEND P.C.B. LAYOUT



CIRCUIT: 4PDT
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. RATING: 0.1A @30VDC
4. TRAVEL TO MAKE: 1.34 ± 0.38
TOTAL TRAVEL: 2.50 ± 0.38
TRAVEL TO LATCH POSITION: 150 ± 0.38
5. ACTUATION FORCE: 250 +100/-50gf
6. ELECTRICAL LIFE: 10,000 Cycles Make & Break
CYCLES at Full Load.
- ▲ 7. DESIGNATE MAJOR DIMENSIONS

SWITCH FUNCTION	
CONNECTED TERM. #	FUNCTION
2-1,5-4,8-7,11-10	NORMALLY CLOSED
2-3,5-6,8-9,11-12	NORMALLY OPEN
2,5,8,11	COMMON

EE-SWITCH®

TITLE		SCALE		DATE		DR		DWG		REV	
TL4201 EE Y A		2:1		2/08/01		CJB		P010552		E	
CHANGE PART DESCRIPTION		2-8-01		CJB		DATE		CHKD			
DESCRIPTION											
ECN No.											
REV.											

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED