


REV. X

FIG. 2

—A: OPTION (SEE NOTE 5)
 MOLDED ALIGNMENT PIN (3 POS. MIN.)
 (DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)

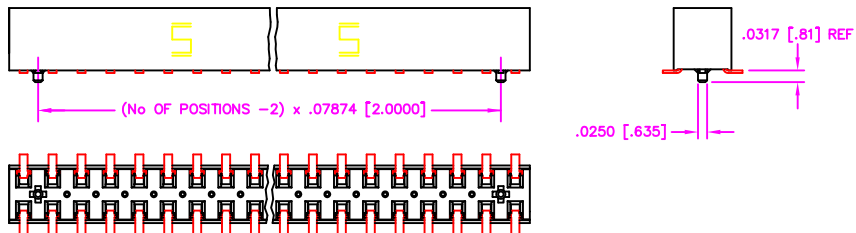

UNLESS OTHERWISE NOTED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:

ONE PLACE DECIMALS $\pm .1$
 TWO PLACE DECIMALS $\pm .01$
 THREE PLACE DECIMALS $\pm .005$
 FOUR PLACE DECIMALS $\pm .0020$

ANGLES
 $\pm 2^\circ$

TITLE:
 DUAL ROW 2mm x
 2mm ASSEMBLY

DWG NO:
 TLE-1XX-XX-X-DV-X
 SHEET 2 OF 2

FIG. 3

—A: OPTION (SEE NOTE 5)
 STAKED ALIGNMENT PIN (4 POS. MIN.)
 (DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)

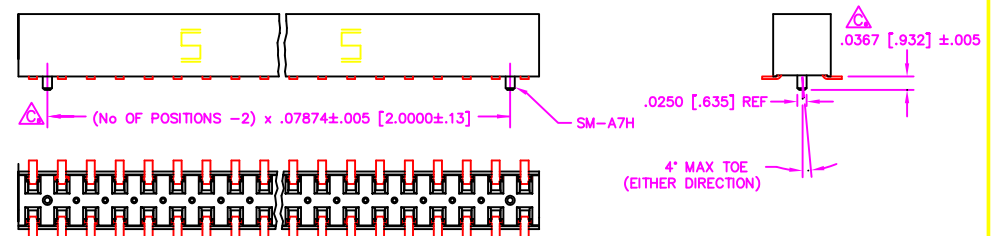


FIG. 4

—P: OPTION
 (4 POS. MIN.)
 PICK & PLACE PAD
 (DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)


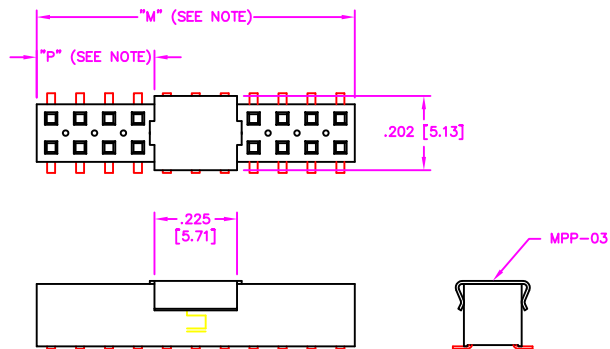


FIGURE 5



—K: POLYAMIDE FILM PAD
 (3 POS. MIN.)

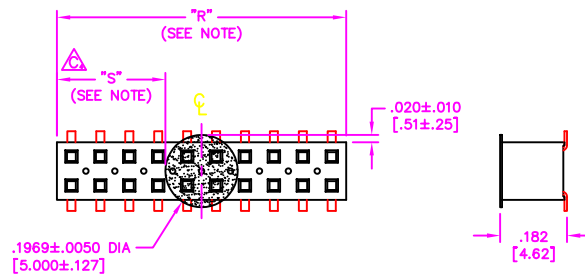

NOTE: "R" = USED MEASURED DIMENSION (REF)
 "S" = $\{("R" - .1969 [5.00]) / 2\} \pm .020 [.51]$

PACKAGING VIEW

TABLE 1		
OPTION	PACKAGING TUBE	PLUG
ALL OPTIONS	PT-1-24-01-63	TP-24



PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
 CONFIDENTIAL AND PROPRIETARY TO
 SAMTEC INC. AND SHALL NOT BE
 REPRODUCED OR TRANSFERRED TO
 OTHER DOCUMENTS OR DISCLOSED TO
 OTHERS OR USED FOR ANY PURPOSE
 OTHER THAN THAT FOR WHICH IT WAS
 OBTAINED WITHOUT THE EXPRESSED
 WRITTEN CONSENT OF SAMTEC INC.

NOTE: "M" = USED MEASURED DIMENSION (REF)
 "P" = $\{("M" - .225 [5.71]) / 2\} \pm .020 [.51]$

samtec

EXISPROD\ASSEMBLY\2MM
 TLE-ASM2

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY:
 D PURVIS 01-20-97

TLE-1XX-XX-X-DV-X
 SHEET 2 OF 2

PLOT SCALE 1=.