
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

## **SPECIFICATIONS**

PARAMETERS	VALUES	UNITS
DIRECTIVITY	OMNI	_
SENSITIVITY	-45±3	dB
STANDARD OPERATING VOLTAGE	2.0	Vdc
MAX OPERATING VOLTAGE	10.0	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mA
IMPEDANCE	2.2	KOhm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	PIN	_
INTERNAL CAPACITOR	N/A	рF

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	1/24/06	
Α	ADDED TERMINAL POLARITY	2/5/07	D.F.

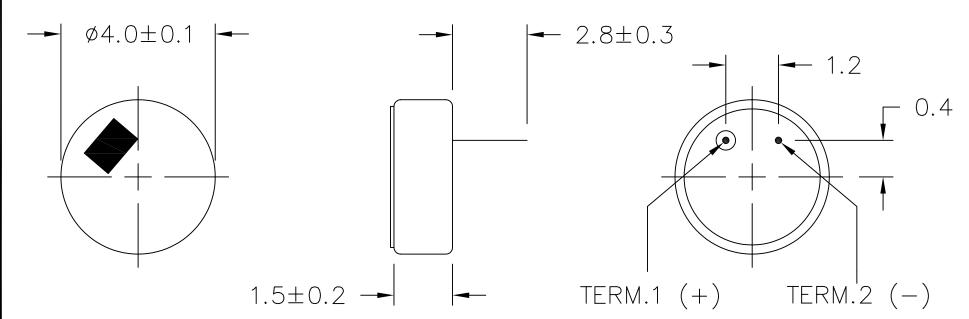

TOM-1545P-R.DWG

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3".			₩ pr	rojects® nlimited	Dayton , Ohio	
APPROVALS	MICROPHONE					
DRAWN J.A.F.	01/06					
CHECKED E.P.	01/06	SIZE A	DRAWING NO. TOM-1545P-R			
APPROVED B.R.	01/06	А	10M-1343P-R			
DO NOT SCALE DRA	AWING	SCALE: N.T.S.			SHEET 1 OF	1