

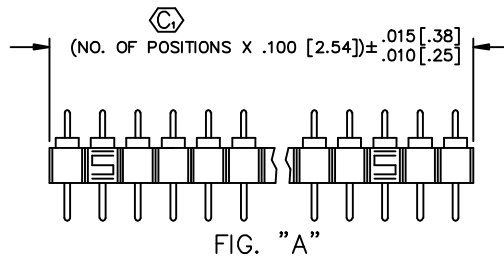
DO NOT SCALE
FROM THIS PRINT

TABLE 1

TERMINAL STYLE	TERMINAL/BODY SPECIFICATION				FIG.	SHEET
	TS: SINGLE	TS BODY	TD: DOUBLE	TD BODY		
-AA	T-1R5-X	SEE NOTE 7	T-1R5-X	SEE NOTE 6	1	2
-A	T-1R0-X	SEE NOTE 7	T-1R0-X	SEE NOTE 6	2	2
-A-1	T-1R7-1-X	SEE NOTE 7	T-1R7-1-X	SEE NOTE 6	3	2
-A-2	T-1R7-2-X	SEE NOTE 7	T-1R7-2-X	SEE NOTE 6	4	2
-B	T-1R1-X	SEE NOTE 10	T-1R1-X	SEE NOTE 6	5	2
-B-2	T-1R8-2-X	SEE NOTE 7	T-1R8-2-X	SEE NOTE 6	7	2
-C	T-1R2-X	SEE NOTE 7	T-1R2-X	SEE NOTE 6	8	2
-C-1	T-1R9-1-X	SEE NOTE 7	T-1R9-1-X	SEE NOTE 6	9	2
-C-2	T-1R9-2-X	SEE NOTE 7	T-1R9-2-X	SEE NOTE 6	10	2
-D-1-1	T-1S4-1-1-X	SEE NOTE 7	T-1S4-1-1-X	SEE NOTE 6	11	3
-D-1-2	T-1S4-1-2-X	SEE NOTE 7	T-1S4-1-2-X	SEE NOTE 6	12	3
-D-2-1	T-1S4-2-1-X	SEE NOTE 7	N/A		13	3
-D-2-2	T-1S4-2-1-X	SEE NOTE 7	N/A		14	3
-D-3-2	T-1S4-3-1-X	SEE NOTE 7	N/A		15	3
-D-4-2	T-1S4-4-1-X	SEE NOTE 7	N/A		16	3
-E	T-1R12-X	SEE NOTE 7	N/A		17	3
-F	T-1S5-X	SEE NOTE 7	T-1S5-X	SEE NOTE 6	18	3
-G-1	T-1R5-1-X	SEE NOTE 7	T-1R5-1-X	SEE NOTE 6	19	3
-J	S-1P1-X	SEE NOTE 8	S-1P1-X	DSB-36	21	4
-K	T-1R12-X	SEE NOTE 7	T-1R12-X	SEE NOTE 6	22	4
-L-1	S-1W1-1-X	SEE NOTE 8	S-1W1-1-X	DSB-36	23	4
-L-2	S-1W1-2-X	SEE NOTE 8	S-1W1-2-X	DSB-36	24	4
-L-3	S-1W1-3-X	SEE NOTE 8	S-1W1-3-X	DSB-36	25	4
-M	T-1S2-X	SEE NOTE 8	T-1S2-X	DSB-36	26	4
-N	T-1R5-1-X	SEE NOTE 7	N/A		27	4
-Q-3 *	S-1W1-3-X	SEE NOTE 7	N/A		29	4

N/A = NOT AVAILABLE

* STYLE -Q-3 AVAILABLE ONLY AS A COMPONENT
OF CSP/25 CABLE ASSEMBLIES.**PROPRIETARY NOTE**

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED IN
ANY FORM OR BY ANY MEANS,
ELECTRONIC OR MECHANICAL,
INCLUDING PHOTOCOPYING, RECORDING,
OR BY ANY INFORMATION STORAGE
RETRIEVAL SYSTEM, WITHOUT THE
WRITTEN CONSENT OF SAMTEC INC.

DIMENSIONS ARE IN INCHES

UNLESS OTHERWISE NOTED


TOLERANCES ARE:

ONE PLACE DECIMALS ±
TWO PLACE DECIMALS ±THREE PLACE DECIMALS ±
FOUR PLACE DECIMALS ±ANGLES
± 2°

TITLE:

TERMINAL STRIP
ASSEMBLY

DWG NO:

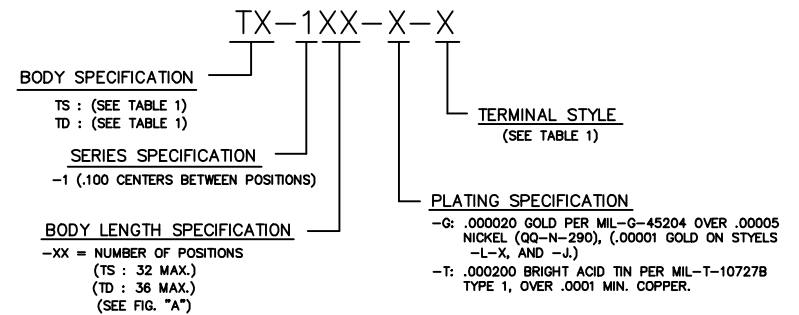TX-1XX-X-X
SHEET 1 OF 4

BODY SPEC.	LEAD STYLE	TUBE	PLUG
TS	A-1, A-2, A, AA, B, C, H, G-1	PT-1-24-01-24	TP-24
	J	PT-1-24-01-23	TP-12
	D-1-2	PT-1-24-02-03	TP-24
	D-1-1	PT-1-24-10-03	TP-03
TD	A-1	PT-1-24-05-17	TP-07
	A-2	PT-1-24-02-46	
	A, AA	PT-1-24-01-22	TP-03
	J	PT-1-24-01-14	

NOTE:

1. SEE COMPONENT PRINT FOR MAXIMUM ALLOWABLE BOW.
2. MINIMUM PUSHOUT FORCE = 5 LBS.
3. MAXIMUM ALLOWABLE TOE IN/OUT OF TERMINALS = ± 2°.
4. .005 [.13] MAX. ALLOWABLE FLASH AFTER REMOVAL OF CROSS BARS.
5. Ⓞ REPRESENTS A CRITICAL DIMENSION.
6. USE DSB-36 AND FILL WITH COUNTERBORE DOWN.
7. USE TBS-32 AND FILL WITH COUNTERBORE UP.
8. USE SSB-XX AND FILL WITH COUNTERBORE UP.
9. FOR LEAD STYLES PACKAGED IN TUBES: PACKAGE -05 THRU
-36 POSITIONS IN TUBES; LAYER PACKAGE SMALLER POSITIONS.
10. USE SSB-XX AND FILL WITH COUNTERBORE DOWN.

MATERIAL:
INSULATOR:
GLASS FILLED POLYESTER
COLOR: BLACK

TERMINAL:
BRASS, EXCEPT STYLE G
IS PHOSPHOR BRONZE

PLOT SCALE: 1=1

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: L.W. 12/05/84

TX-1XX-X-X
SHEET 1 OF 4