
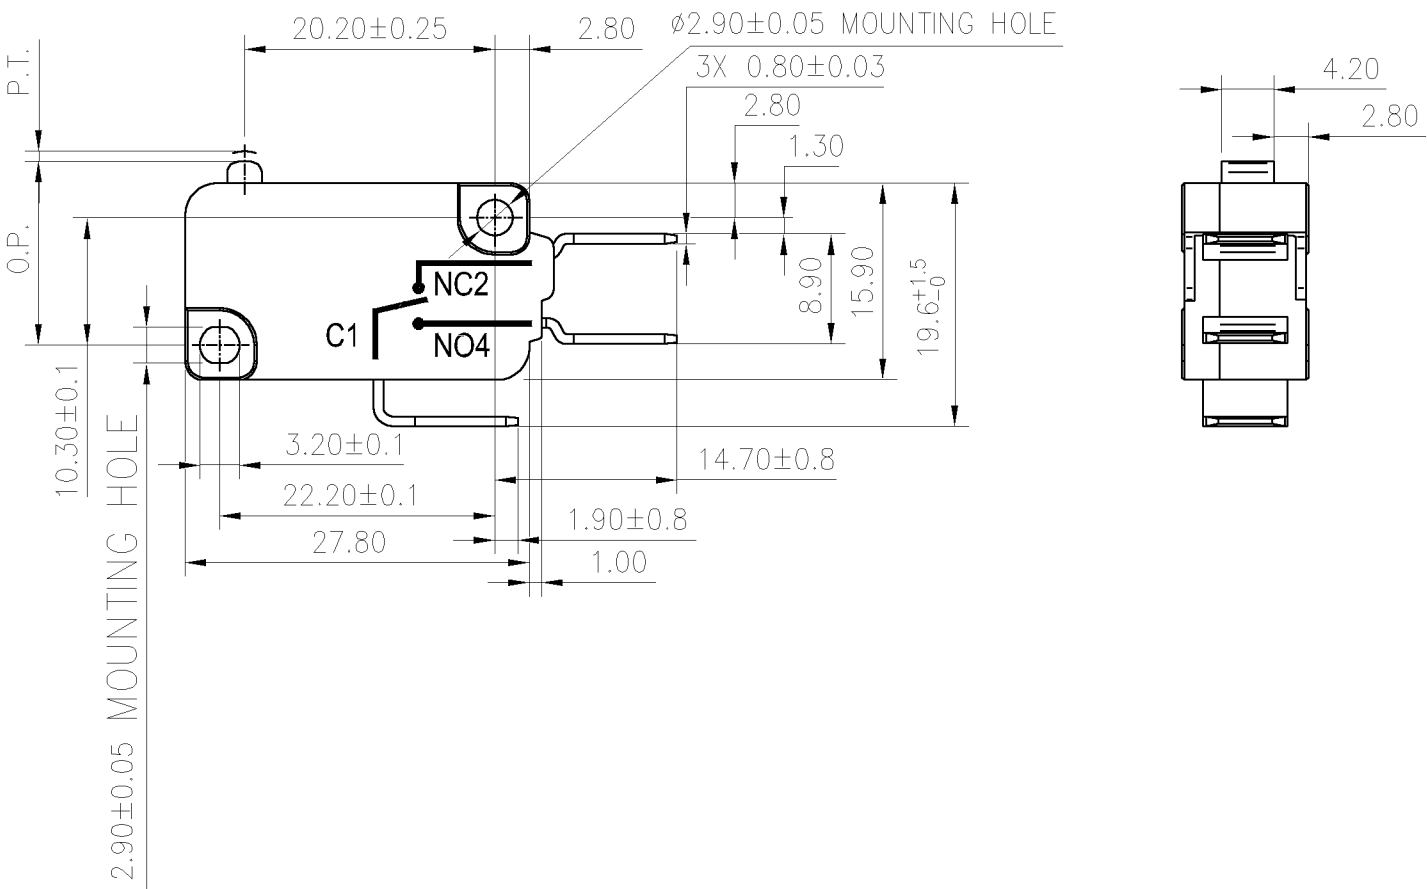


FO-50360-L

HONEYWELL PART NUMBER
V15H16-CZ300-K
PRODUCT CODE
CFW2063

REV	DOCUMENT	CHANGED BY	CHECK
A	0038670	VS 10APR08	BLR

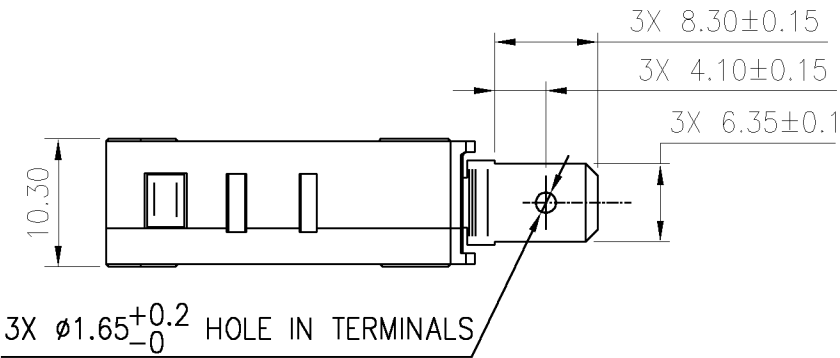

NOTES:
1. TERMINALS WILL ACCEPT 6.35mm WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:		DRAWN		KSR		01APR08		Honeywell										
		CONTACT ARRANGEMENT S.P.D.T				CHECK		RJ		01APR08												
OPERATING FORCE: 300gf MAX.		 16(4)A 250V~ 25T150 μ 5E4		NO PLACE		X	±	±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC									
DIFFERENTIAL FORCE:				ONE PLACE		.X	±	±														
RELEASE FORCE: 75gf MIN.				TWO PLACE		.XX	±	± 0.40														
FREE POSITION:				THREE PLACE		.XXX	±	±	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE		TYPE		CAGE CODE		DRAWING NAME		REV	
OPERATING POSITION: 14.7±0.5MM.				ANGLES		X	±	± 2°					B		I				V15H16-CZ300-K		A	
PRE-TRAVEL: 1.6MM MAX.		 16A 1/2HP 125/250VAC		THIRD ANGLE PROJECTION 				AutoCAD				SCALE		NTS				SHEET		1 OF 1		
DIFFERENTIAL TRAVEL: 0.4MM MAX.																						
OVER-TRAVEL: 0.8MM MIN.																						
FULL OVERTRAVEL FORCE:																						