
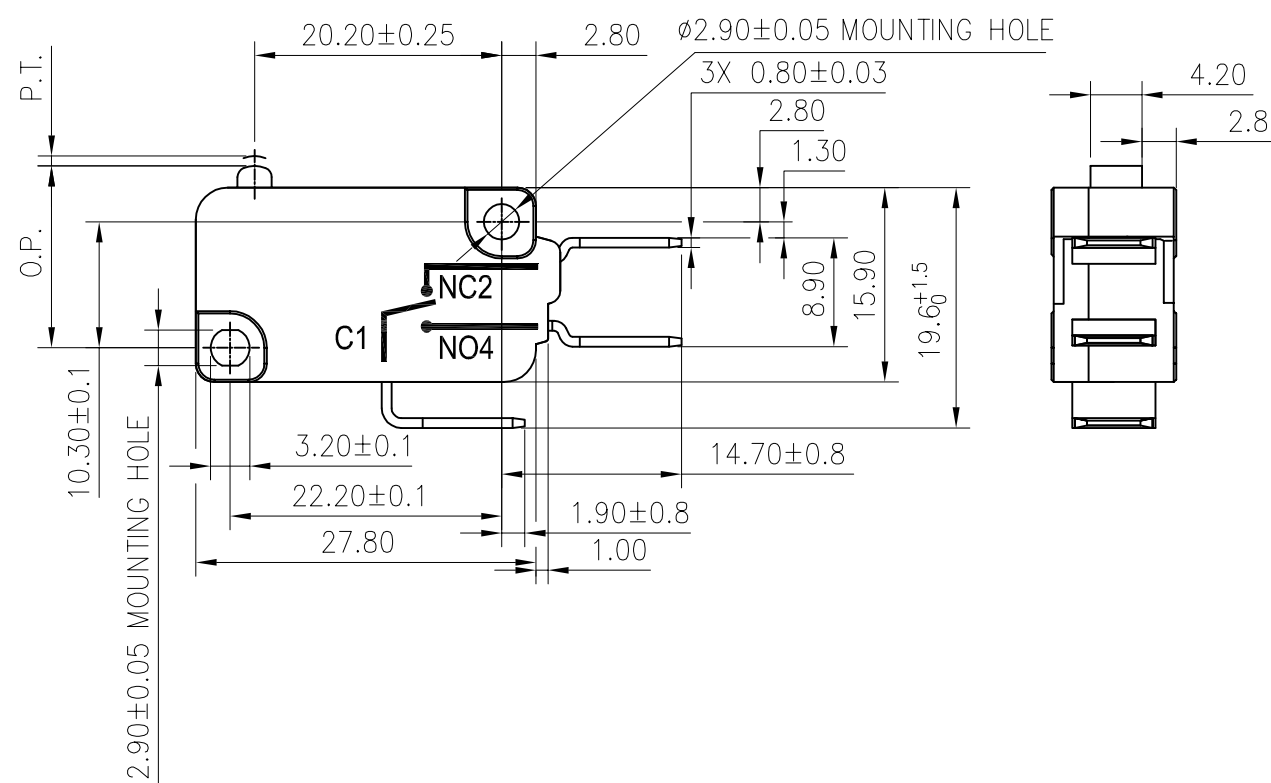


REV	DOCUMENT	CHANGED BY	CHECK
B	0039823	KVS 15MAY08	ASD

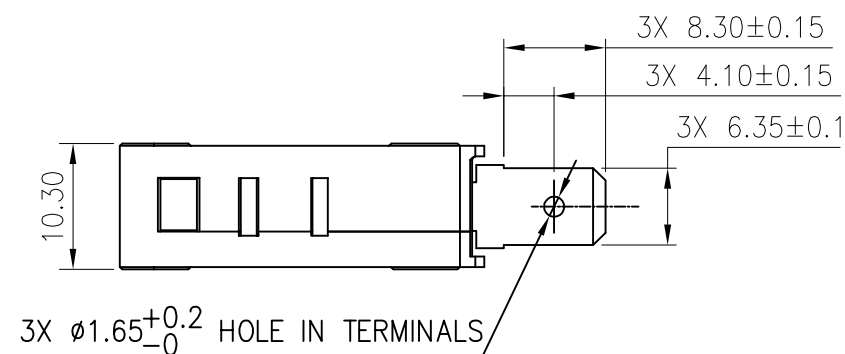

1. TERMINALS WILL ACCEPT 6.35 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM		DRAWN	KSR	03DEC07	Honeywell					
OPERATING FORCE: 100gf MAX. DIFFERENTIAL FORCE: RELEASE FORCE: 25gf MIN. FREE POSITION: OPERATING POSITION: 14.7±0.5MM. PRE-TRAVEL: 1.6MM MAX. DIFFERENTIAL TRAVEL: 0.4MM MAX. OVER-TRAVEL: 0.8MM MIN. FULL OVERTRAVEL FORCE:		CONTACT ARRANGEMENT S.P.D.T		TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± - TWO PLACE .XX ± 0.40 THREE PLACE .XXX ± - ANGLES X ± 2°		CHECK	RJ	03DEC07						
		EN 17 CQC 16(4)A 250V~ 25T125 μ 5E4 RJ cRJ 16A 1/2HP 125/250VAC		THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE					
						INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	CAGE CODE	DRAWING NAME V15T16-CZ100-K		REV B
						AutoCAD			SCALE	—			SHEET	1 OF 1