


FED.MFG.CODE 91929

CATALOG LISTING

CW-B4729

REVISIONS	
A	CO- 76103 LJF 5 OCT 93
B	CO- 92478 TSM 22 APR 98


WJC	5 JUN 91	CHECK	D A W	5 JUN 91	CHECK	RELEASE NO.	PR-19239	REPLACES
WJC	5 JUN 91	CHECK	D A W	5 JUN 91	CHECK	RELEASE NO.	PR-19239	REPLACES

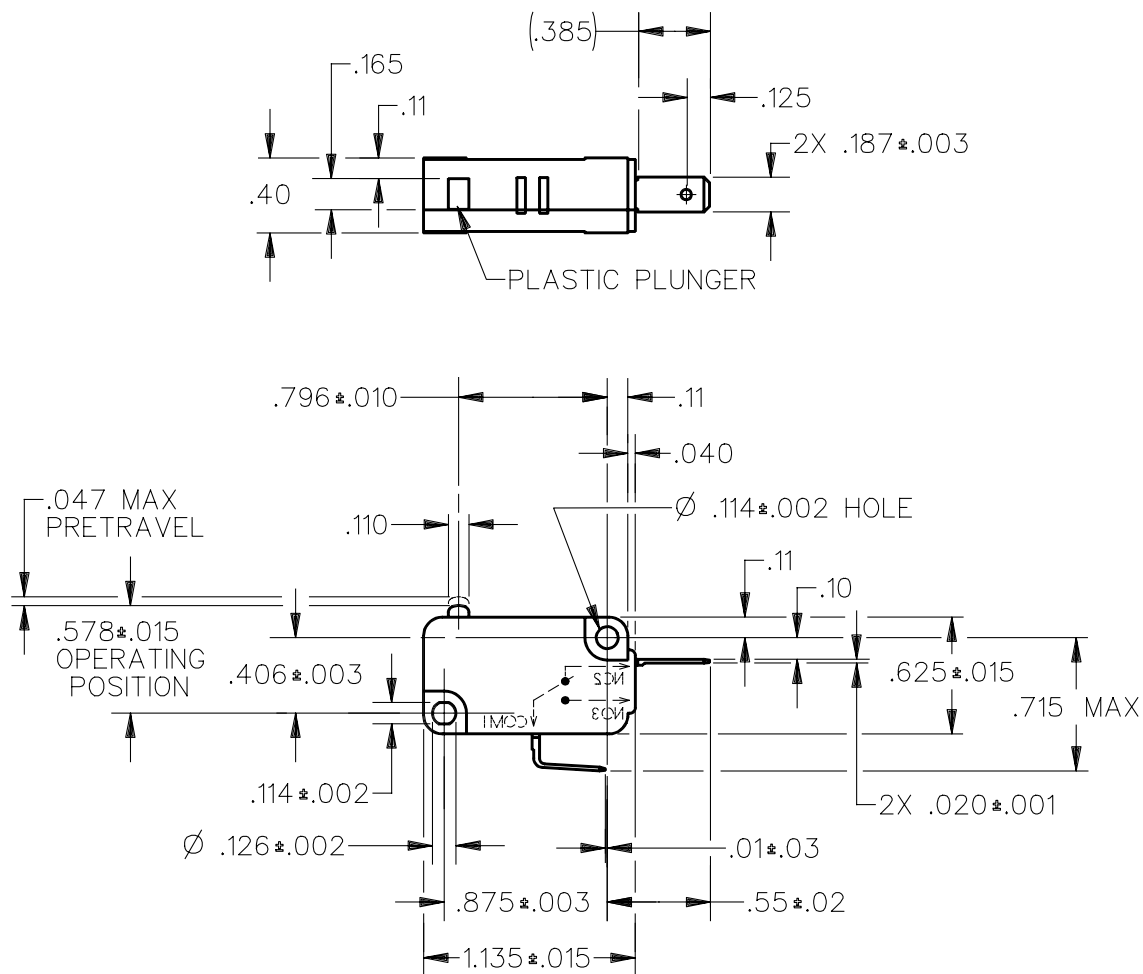

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE—150 GRAMS MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE—25 GRAMS MIN	S P N C		
DIFFERENTIAL TRAVEL—.002—.010	L156 11A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"	ONE PLACE (.0)	±.030
OVERTRAVEL—.050 MIN		TWO PLACE (.00)	±.015
FREE POSITION—.625 MAX		THREE PLACE (.000)	±.005
RELEASE TRAVEL—.010 MIN		ANGLES	±
		WEIGHT	