

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-2A17D8-207

CW-B0216

CATALOG LISTING

V7-2A17D8-207

M

ISSUE

2

REPLACES

RELEASE NO. PR-19239

CHECK

CHECK

12 JUN 91

DAW

CHECK

6 JUN 91


WJC

REVISIONS

A	CO
	76420
	DCS
29	NOV 93

DDM/CAD


DRAWN

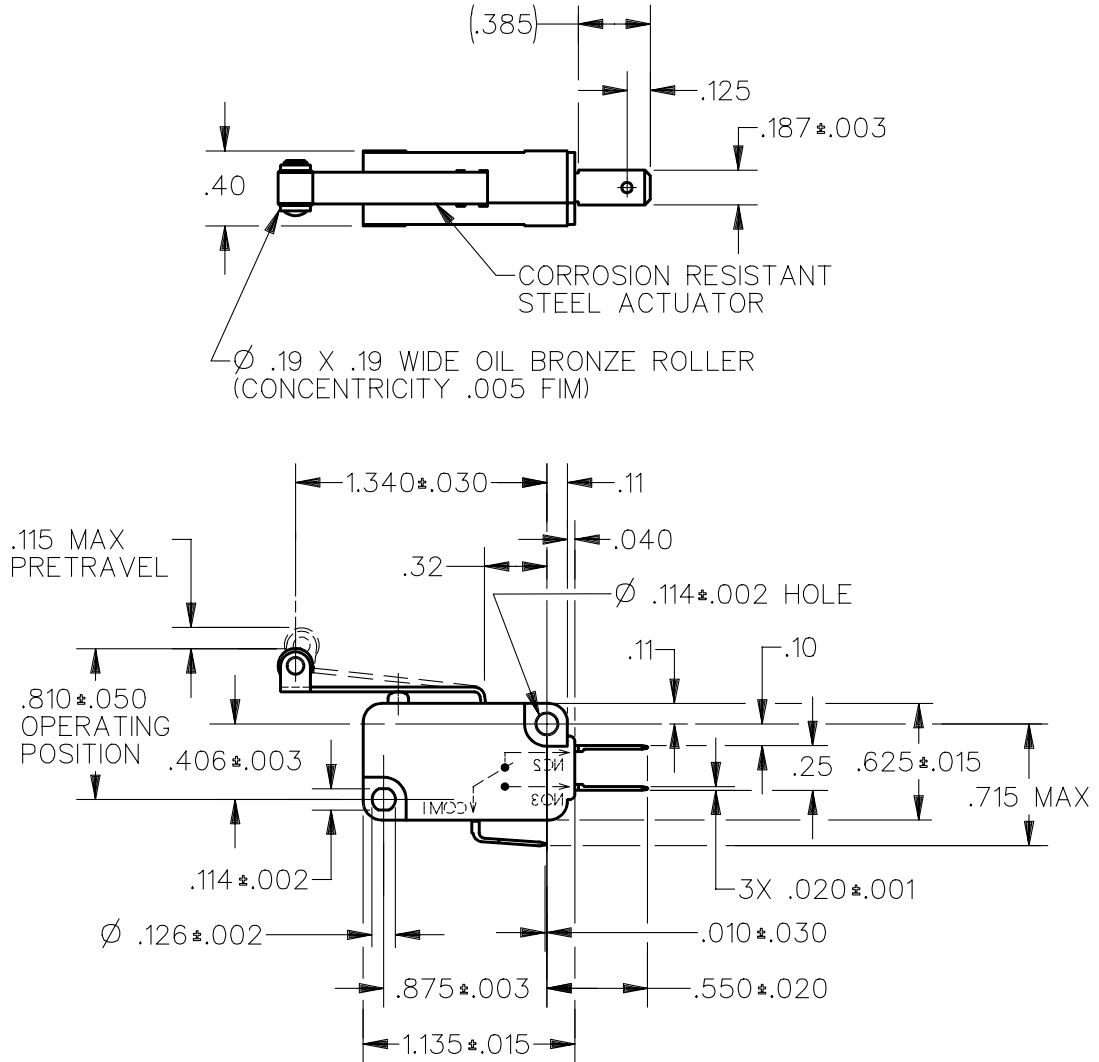

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 43 GRAMS MAX
RELEASE FORCE --- 3 GRAMS MIN
DIFFERENTIAL TRAVEL --- .025 MAX
OVERTRAVEL --- .060 MIN
RELEASE TRAVEL --- .016 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162 5A 125, 250, 277 VAC
1/10HP 250 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.)	$\pm .030$
TWO PLACE (.00)	$\pm .015$
THREE PLACE (.000)	$\pm .005$
ANGLES	$\pm$

WEIGHT