


PART NUMBER: VOF-65

DESCRIPTION: switching power supply

features

- RoHS compliant
- universal input 85~264 Vac
- output over-current protected
- output over-voltage protected
- industry standard foot-print
- efficiency up to 88%
- safety approved to TUV, CE; UL/cUL
- conducted EMI meets EN55022 class B and FCC class B

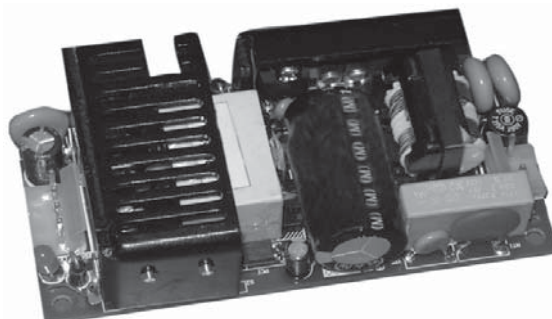

| model | voltage (Vdc) | current (A) | total 1, 2 regulation | ripple & noise ³ (mVp-p max) | efficiency |
|------------|------------------|----------------|--------------------------|--|------------|
| VOF-65-3.3 | 3.3 | 8.0 | ±5% | 50 | 74% |
| VOF-65-5 | 5 | 8.0 | ±5% | 50 | 78% |
| VOF-65-7.5 | 7.5 | 6.6 | ±5% | 75 | 78% |
| VOF-65-9 | 9 | 6.6 | ±5% | 90 | 82% |
| VOF-65-12 | 12 | 5.4 | ±5% | 120 | 84% |
| VOF-65-15 | 15 | 4.3 | ±5% | 150 | 85% |
| VOF-65-24 | 24 | 2.7 | ±5% | 240 | 86% |
| VOF-65-48 | 48 | 1.35 | ±5% | 480 | 88% |

notes:

1. measured from high line to low line at full load.

2. measured from full load to 10% load at 110 VAC.

3. ripple & noise measured at 20 MHz BW, with a 0.1 μ F ceramic cap and a 10 μ F electrolytic cap on the output and the two earth ground pads are connected to input earth ground.



PART NUMBER: VOF-65

DESCRIPTION: switching power supply

INPUT

| parameter | conditions/description | min | nom | max | units |
|-----------------|--|-----|------|-----|-------|
| input frequency | | 47 | | 63 | Hz |
| input voltage | output power derated from 85-90 VAC | 85 | | 264 | VAC |
| input current | AC input of 110 VAC | | 1400 | | mA |
| | AC input of 210 VAC | | 700 | | mA |
| inrush current | measured at 110 VAC at full load, cold start | | | 25 | A |
| | measured at 220 VAC at full load, cold start | | | 50 | A |
| input fuse | built-in, non-user serviceable. | | | | |

OUTPUT

| parameter | conditions/description | min | nom | max | units |
|-------------------|---|-------|-----|-------|-------|
| efficiency | see table above. typical values measured at 115 VAC, full load. | | | | |
| hold up time | at 115 VAC, full load | 8 | | | mS |
| adjustability | adjustable with built-in trim pot. | - 5 | | +5 | % |
| temp. coefficient | | -0.05 | | +0.05 | %/°C |

PROTECTION CIRCUIT

| parameter | conditions/description |
|---------------------|---|
| overload | current limiting starts at 105% of the rated output current and recovers automatically. |
| output over-voltage | output voltage is limited to 115% by TVS clamping. |
| short circuit | protected. long term short circuit may reduce reliability. |

GENERAL AND SAFETY

| parameter | conditions/description | min | nom | max | units |
|-------------------------------|--|------|-----|--------|-------|
| switching frequency | | | 60 | | KHz |
| operating temp. | see derating curves. | 0 | | 50 | °C |
| storage temp. | | -20 | | 85 | °C |
| operating humid. | non-condensing | 20% | | 90% | RH |
| storage humid. | non-condensing | 20% | | 95% | RH |
| operating altitude | | | | 3,000 | m |
| | | | | 10,000 | ft |
| storage altitude | | | | 9,000 | m |
| | | | | 30,000 | ft |
| EMI | conducted emissions comply with FCC class B, EN55022 class B | | | | |
| safety | approved to TUV EN60950, CE, CB; UL/cUL 60950-1 | | | | |
| RoHS | 2002/95/EC | | | | |
| leakage current | per EN60950, 264 VAC | | | 1.5 | mA |
| isolation voltage (HI-POT) | applied for 1 minute. | | | | |
| | primary to secondary: | 3000 | | | VAC |
| | primary to transformer core: | 1500 | | | VAC |
| | primary to earth ground: | 1500 | | | VAC |
| insulation resistance | measured at 500 VDC, at room temp. | 50 | | | MΩ |
| MTBF (@ 25°C) | MIL-HDBK-217F | 250K | | | hours |
| warranty | standard warranty length | | | 2 | years |



PART NUMBER: VOF-65

DESCRIPTION: switching power supply

MECHANICAL

| parameter | conditions/description | min | nom | max | units |
|----------------|---|-----|-----|------|-------|
| dimensions | 4"(102mm) x 2"(51mm) x 1.26"(32mm) | | | | |
| weight | | | | 0.17 | kg |
| cooling method | free air convection (see derating curves below) | | | | |


MATING CONNECTORS

| parameter | conditions/description |
|-----------------|---|
| AC input (CN1) | mates with Molex housing 09-50-3031 with Molex 2878 series crimp contact. |
| DC output (CN2) | mates with Molex housing 09-50-3041 with Molex 2878 series crimp contact. |


DERATING CURVES

1. output power vs. ambient temperature

a. 3.3, 5, 7.5 V models

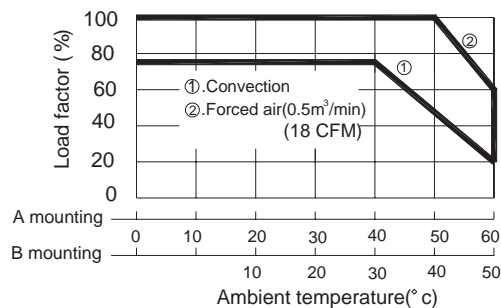


b. all other models

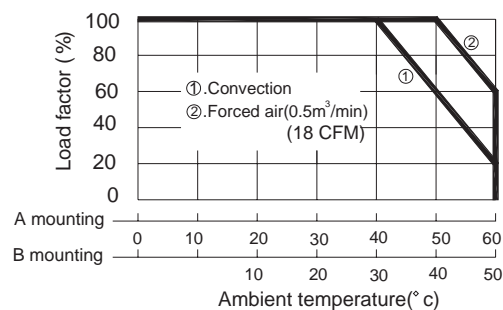

2. output power vs. input voltage

all models

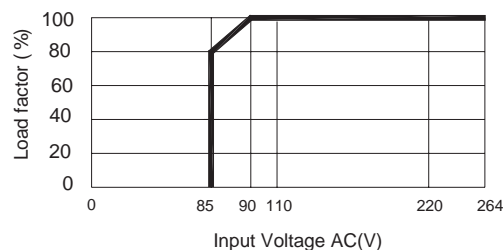





PART NUMBER: VOF-65

DESCRIPTION: switching power supply

MECHANICAL DRAWING

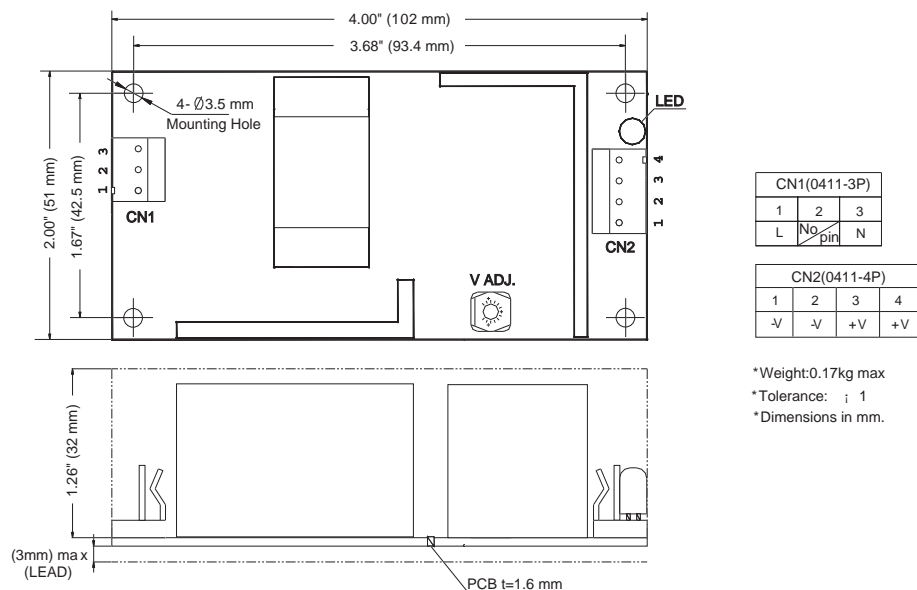

MOUNTING METHOD

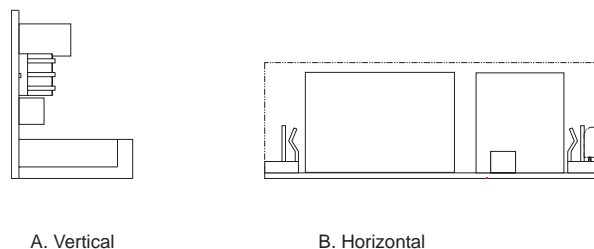

*V-Infinity reserves the right to make changes to its products or to discontinue any product or service without notice, and to advise customers to verify the most up-to-date product information before placing orders. V-Infinity assumes no liability or responsibility for customer's applications using V-Infinity products other than repair or replacing (at V-I's option) V-Infinity products not meeting V-I's published specifications. Nothing will be covered outside of standard product warranty.