


Technical drawing of a mechanical part with dimensions in inches and millimeters. The drawing shows a side view of a component with a central horizontal axis. Key dimensions include:

- Top horizontal dimensions: REF 0.10 (2.5), REF 0.78 (19.8), REF 0.02 (0.5).
- Left vertical dimensions: REF 0.60 (15.2), 0.23 (5.8), REF.
- Right vertical dimensions: 0.42 (10.7), REF 0.09 (2.3).
- Bottom horizontal dimensions: 0.40 (10.2), 0.60 (15.2).

PANDUIT PART NUMBER	MAXIMUM CABLE DIAMETER	PANEL DIMENSIONS		WEIGHT LBS. (g) / 100 PCS
		THICKNESS	HOLE SIZE	
VWS4238	0.38 (9.6)	0.03/0.08 (0.8/2.0)	.187/.192 (4.7/4.9)	0.13 (60)

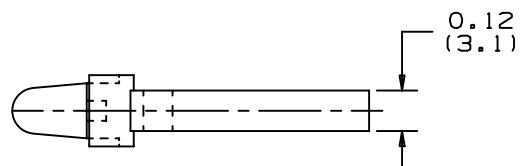

1. SEE CURRENT PRICE SHEET FOR PART NUMBER
SUFFIX DESIGNATION FOR PACKAGE SIZE
AND PART COLOR.

R	3/13/02	LGG		INITIAL RELEASE. REPLACED G-00845 ADDED "REF" TO DIMS.	GB0239JB	R				
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP		

(DIMENSIONS IN PARENTHESSES ARE METRIC)			
CAD FILENAME/LAYERS		G00239JB_VWS4238_00	
		CORP. TINLEY PARK, ILLINOIS	
VERTICAL WIRE SADDLE VWS4238			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± N/A (.XXX) ± .010 (.25) (.XX) ± .02 (.5) ANGLES ± N/A		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY LGG	MAT'L: NYLON 6/6	SCALE 2/1	
DATE 2/13/02		DRAWING NO. GB0239JB	DWG A
CHK'D		SIZE	