






W1G300 Series

Axial

Ø 300mm S-Range

- DC axial fans have least power consumption blowing at free air. As the back pressure increases, the power consumption increases. The combination of impeller and external-rotor motor provides an optimal aerodynamic solution.
- Individual sickle blades made of sheet steel are welded onto the external-rotor motor and dynamically balanced.
- Integrated electronics, reverse polarity and locked-rotor protection.
- Discharge over struts: Dir. of rotation is CCW looking at rotor. Inlet over struts: Dir. of rotation is CW looking at rotor.
- Round venturi mounting plate with 9 mm holes. Ready to install.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	CFM @ 0	VDC	Volt. Range	Power (kW)	dBA	Max Amb. Temp C	Bearing Type	Features	Grill Position	Wgt. (lbs)
W1G300-CE13-52	1383	24	16 to 28	100	66	60	Ball	Leads	Inlet	7.00
W1G300-CE13-54	1383	24	16 to 28	100	66	60	Ball	Leads	Dischg	7.00
W1G300-CE17-52	1383	48	36 to 56	100	66	60	Ball	Leads	Inlet	7.00
W1G300-CE17-54	1383	48	36 to 56	100	66	60	Ball	Leads	Dischg	7.00

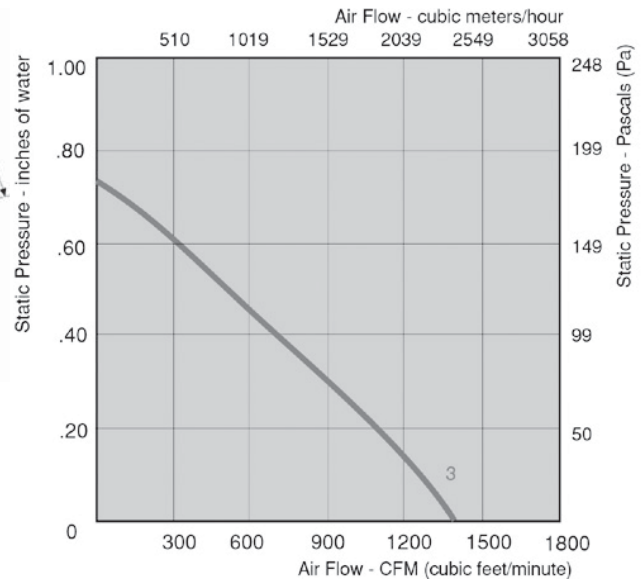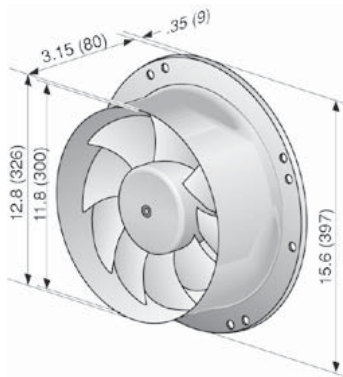

ebm-papst

e-mail: sales@us.ebmpapst.com • TEL: 860-674-1515 • FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice