

Series Part Numbers

Connector Code _XX_	Description	P / N
AM	SMA Plug	W765FL-L-AM-AGDPU
AH	SMA Plug Reverse Polarity	W765FL-L-AH-AGDPU
MM	MMCX Straight Plug	W765FL-L-MM-AGDPU
RMM	MMCX Right Angle Plug	W765FL-L-RMM-AGDPU


Electrical Properties:

Frequency Range: 824~960 MHz/1710~2170 MHz
Impedance: 50Ω nominal
VSWR: <2.0:1
Gain: 2 dBi
Radiation: Omni
Polarization: Vertical

Mechanical Properties:

Cable: Low loss cable J100
Cable Length: L to be defined in inches
Connector: XX to be specified by customer
Material:
Body: Polycarbonate(Black)
Base: Brass with Nickel plating
Operation Temp.: -20°C to +65°C
Storage Temp.: -30°C to +75°C

This is a RoHS compliant product.

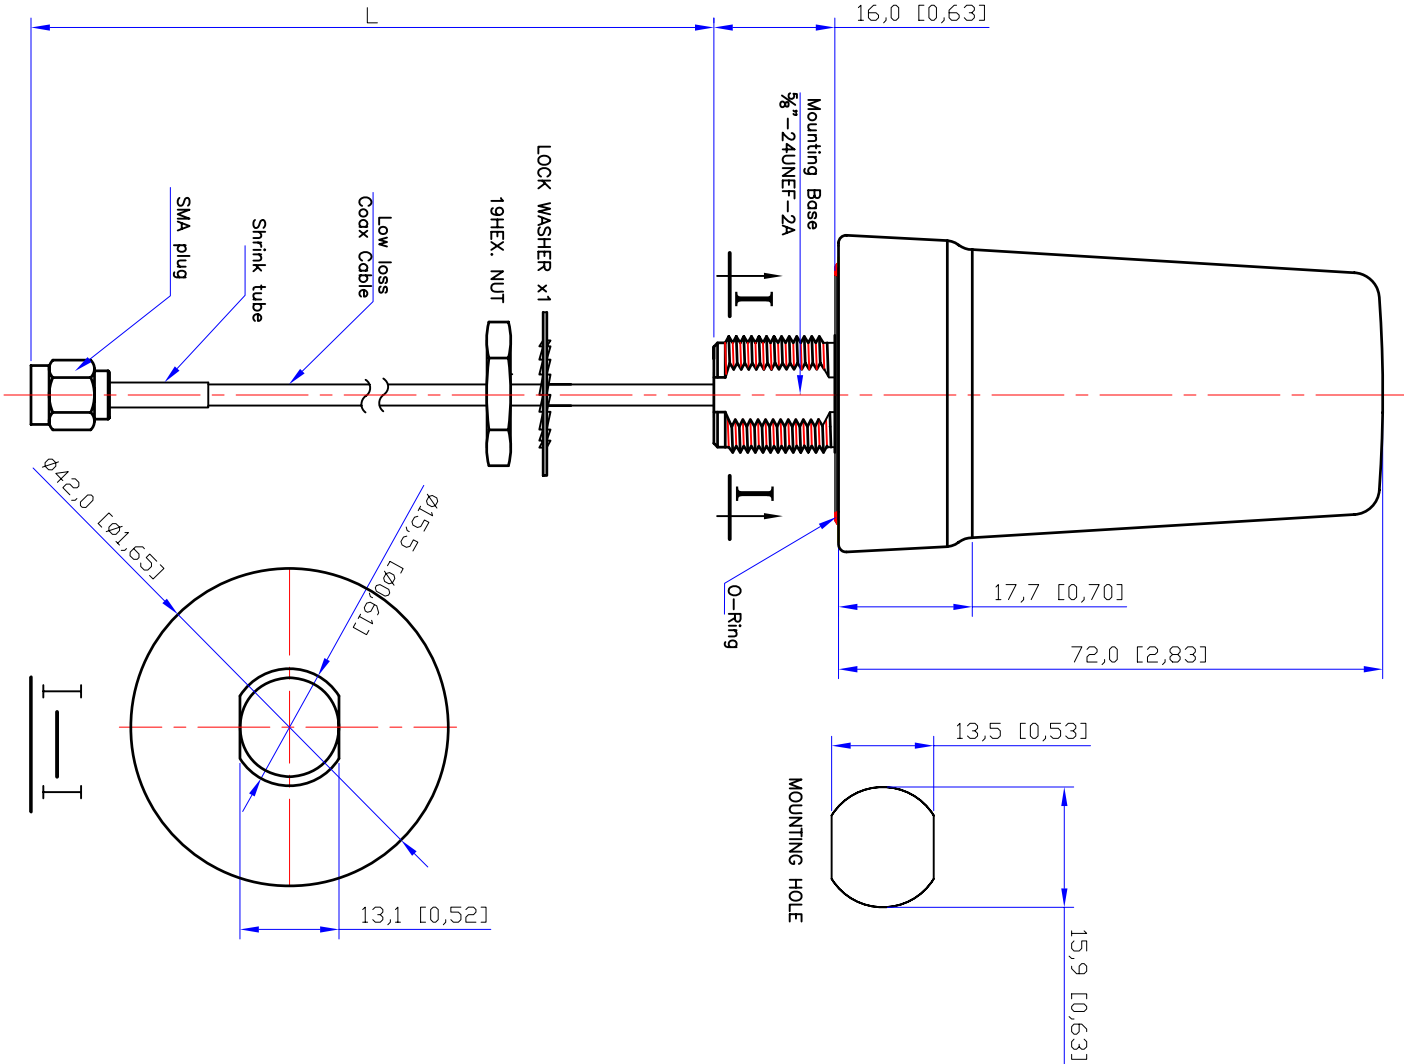

TITLE	Multi-Band External Antenna		Rev. Date	05/23/07	SHEET	1 OF 1
	W765 Model					
UNIT	DWG. NO.	W765FL-L-XX-AGDPU				
mm(In.)						
SCALE						
none						
NEARSON						