
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	6	Vdc
OPERATING VOLTAGE RANGE	3 ~ 12	Vdc
RATED CURRENT (MAX)	20	m A
MINIMUM SPL @ 10 CM	100	dBA
RESONANT FREQUENCY	2800±500	Hz
TONE OR PULSE RATE	CONTINUOUS	0 PULSE PER SECOND
OPERATING TEMPERATURE	-20 ~ +60	ċ
STORAGE TEMPERATURE	−30 ~ +70	ċ
HOUSING MATERIAL	ABS	1
TERMINAL MATERIAL	LEAD WIRES	-

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	5/25/06	
Α	REVISED SPL	8/13/07	D.F.

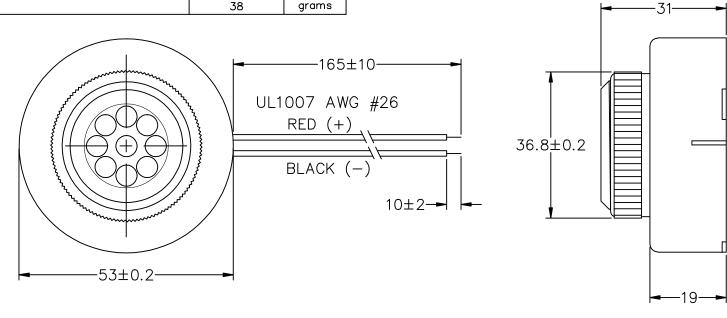

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3'.

APPROVALS

CHECKED

J.D.

E.P.

B.R.

unlimited
INDIC

projects ®

Dayton , Ohio

NOTES:

WEIGHT

1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

X-5328-P-C-LW165-R.DWG

CATOR DATE 5/06 SIZE 5/06

DRAWING NO. X-5328-P-C-LW165-R

DO NOT SCALE DRAWING SCALE: N.T.S.

5/06

SHEET 1 OF