



THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.  
©2005, Projects Unlimited Inc.

## SPECIFICATIONS

| PARAMETERS              | VALUES     | UNITS                |
|-------------------------|------------|----------------------|
| RATED VOLTAGE           | 12         | Vdc                  |
| OPERATING VOLTAGE RANGE | 7 ~ 15     | Vdc                  |
| RATED CURRENT (MAX)     | 200        | mA                   |
| MINIMUM SPL @ 10 CM     | 112        | dBA                  |
| RESONANT FREQUENCY      | 3000±500   | Hz                   |
| TONE OR PULSE RATE      | SLOW PULSE | 1.2 PULSE PER SECOND |
| OPERATING TEMPERATURE   | -20 ~ +60  | °C                   |
| STORAGE TEMPERATURE     | -30 ~ +70  | °C                   |
| HOUSING MATERIAL        | ABS        | —                    |
| TERMINAL MATERIAL       | LEAD WIRE  | —                    |
| WEIGHT                  | 120        | grams                |

## REVISIONS

| LTR | DESCRIPTION               | DATE     | APPROVED |
|-----|---------------------------|----------|----------|
| —   | RELEASED FROM ENGINEERING | 11/22/06 |          |
| A   | REVISED MINIMUM SPL       | 6/13/07  | D.F.     |

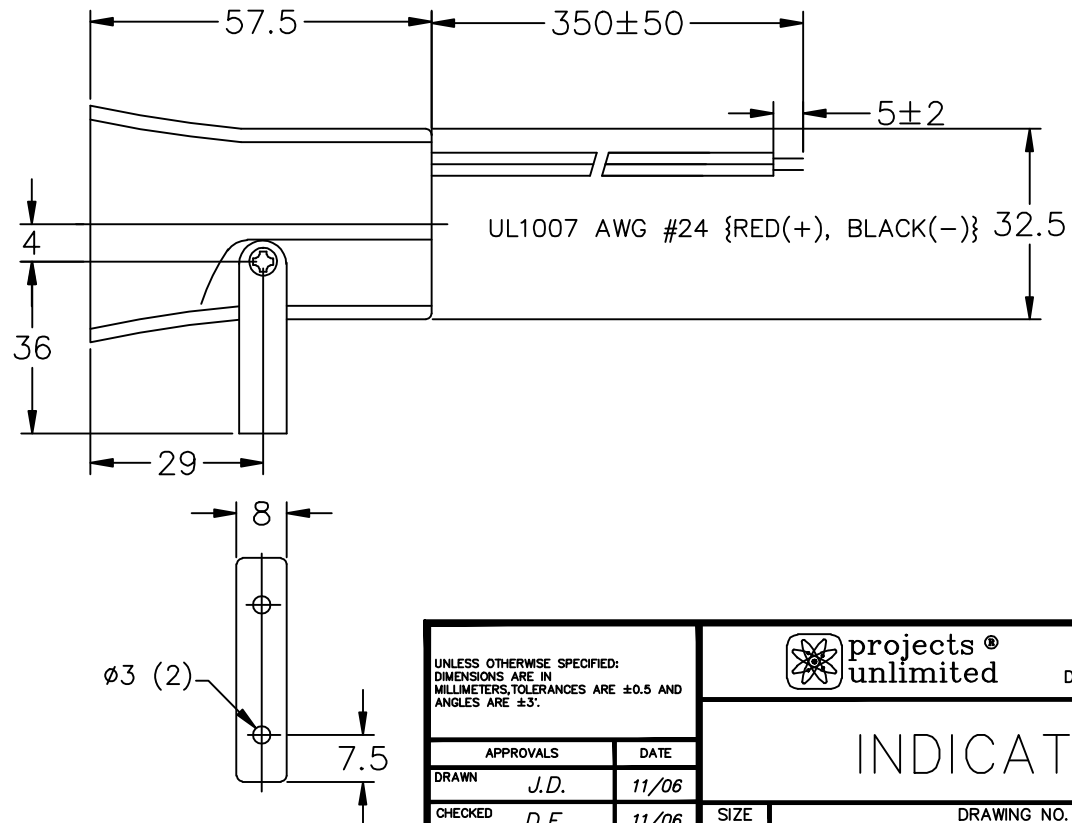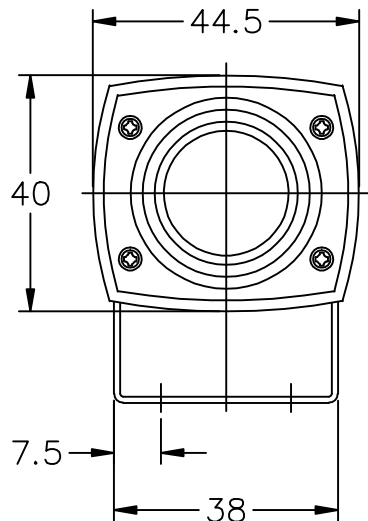

### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME  
X-5735-LW350-SP-R.DWG

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN  
MILLIMETERS, TOLERANCES ARE ±0.5 AND  
ANGLES ARE ±3°.

| APPROVALS            | DATE  |
|----------------------|-------|
| DRAWN J.D.           | 11/06 |
| CHECKED D.F.         | 11/06 |
| APPROVED R.W.        | 11/06 |
| DO NOT SCALE DRAWING |       |



projects®  
unlimited

Dayton, Ohio

# INDICATOR

SIZE A DRAWING NO. X-5735-LW350-SP-R

SCALE: N.T.S.

SHEET 1 OF 1