


XPress™ Ethernet Bridge

900 MHz Wireless Ethernet Bridge



Connect any Ethernet device to the XPress Ethernet Bridge and the modems will function in place of an Ethernet cable. The bridge immediately provides a transparent, wireless, point-to-point or point-to-multipoint cable replacement.

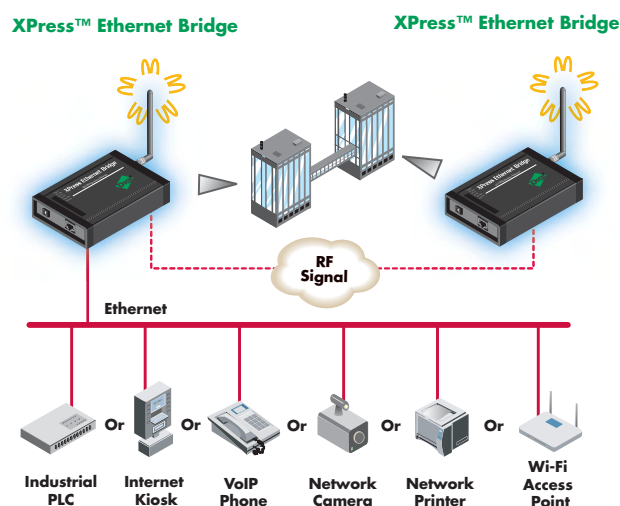

Features/Benefits

- Indoor/urban range up to 2,000 feet (with high gain antenna)
- Outdoor line-of-sight range up to 15 miles (with high gain antenna)
- Does not interfere with Wi-Fi networks
- Highest Quality of Service (QoS) available
 - Synchronous protocol enables extremely low data latency and jitter
- 128-bit encryption payload protection provides secure data delivery
- Simple plug-and-play
 - Pre-configured with no user programming required
- VLAN extensions supported

Overview

The XPress Ethernet Bridge (XEB) replaces costly wiring with a solution that can wirelessly connect industrial PLCs, electronic (LED) signs, Wi-Fi APs, Pan/Tilt/Zoom security cameras, VoIP phones, Internet kiosks and more. With a range of up to 15 miles (line-of-sight with a high gain antenna) and the ability to transmit through as many as 10 standard walls, the XEB uses the added range and capabilities of the 900 MHz band to communicate where Wi-Fi and other wireless data products fall short. The easy-to-use, long-range XEB features a 1.5 Mbps RF data rate.

The XPress Ethernet Bridge is the best solution when:

- Wi-Fi range is insufficient
- An Ethernet cable drop will cost too much or is impractical to install
- Broadband speed is required (Kiosks/Wi-Fi APs/PTZ cameras)
- Low latency for voice or video is required (VoIP/PTZ cameras)
- 900 MHz license-free ISM band is needed for use in the U.S. and Canada
- An industrial, long-range Ethernet bridge is required

The XPress Ethernet Bridge is available either as a point-to-point matched pair (two modems) or a multipoint transceiver. The Point-to-Point XEB is ideal for applications needing to wirelessly connect only two Ethernet devices. If the application requires (or in the future might require) connecting more than two Ethernet devices, the Multipoint XEB is an excellent option. Each Multipoint XEB has a DIP switch that allows the user to easily configure it as an access point (base radio) or a subscriber unit (remote radio).

Features/Specifications

PERFORMANCE

- Indoor/Urban range:
 - Up to 1000 ft (300 m) w/ 2.5 dB dipole antenna
 - Up to 2000 ft (600 m) w/ high gain antenna
- Outdoor line-of-sight range:
 - Up to 2 mi (3.2 km) w/ 2.5 dB dipole antenna
 - Up to 15 mi (24 km) w/ high gain antenna
- Transmit power output: 125 mW (21 dBm), 4 Watts EIRP (w/ 15 dB antenna)
- Throughput data rate: 935 Kbps
- RF data rate: 1.5Mbps
- Receiver sensitivity: -97 dBm (@10e⁻⁴ BER)

FEATURES

- 10BaseT RJ-45 data connection
- Frequency: ISM 902-928 MHz
- Spread spectrum: Direct Sequence Spread Spectrum (DSSS)
- Auto MDI/MDIX (connects to crossover or straight through cable)
- Encryption: 128-bit
- Channels: 12 non-overlapping
- Automatic frequency select — Radio channel automatically selected and adaptively optimized
- Manual frequency mode
- Status LEDs: Power, RF TX/RX, Ethernet link, Frequency channel, Link quality
- Error-correction technique: Sub-block error detection and retransmission
- Adjacent-band rejection: >60 dB - SAW receiver filter attenuates cellular and pager interference
- Antenna connector: RPTNC female
- PoE (Power over Ethernet): Proprietary system — includes injectors and power supplies

MODEL.....PART NUMBERS

Model

Point-to-Point XEB with Accessories - Commercial (Indoor)
 Point-to-Point XEB with Accessories - Industrial (Outdoor)
 Multipoint XEB with Accessories - Commercial (Indoor)
 Multipoint XEB with Accessories - Industrial (Outdoor)

- Point-to-Point XEBs do not communicate with Multipoint XEBs.
- Point-to-Point XEBs ship from the factory as a matched pair. If one unit fails, both must be replaced with a new pair.

Worldwide

XEB09-C
 XEB09-I
 XEB09-BCSA w/o Accessories XEB09-BCS
 XEB09-BISA w/o Accessories XEB09-BIS

FEATURES (CONTINUED)

- Up to 16 active (63 total) subscriber units per access point
- Serial number-based mating protocol allows every network to be unique
- Point-to-point bridge acts as a wireless IP tunnel
- Multipoint bridge acts as a wireless network switch

REGULATORY APPROVALS

- FCC ID (U.S. Certification Part 15.247) R4N-AW900M
- IC ID (Canada) 5303A-AW900M

POWER REQUIREMENTS

Commercial (Indoor) Ethernet Bridge

- 5 - 7VDC
- 350 mA

Industrial (Outdoor) Ethernet Bridge

- 9 - 48VDC Power over Ethernet
- 150 mA @ 9VDC
- 110 mA @ 12VDC
- 32 mA @ 48VDC

DIMENSIONS

Commercial (Indoor) Ethernet Bridge

- Length: 5.5 in (14.0 cm)
- Width: 3.4 in (8.5 cm)
- Depth: 1.2 in (3.0 cm)
- Weight: 5.64 oz (160 g)

Industrial (Outdoor) Ethernet Bridge

- Length: 7.9 in (20.0 cm)
- Width: 3.2 in (8.0 cm)
- Depth: 2.1 in (5.5 cm)
- Weight: 10.34 oz (293 g)

PACKAGE CONTENTS

Point-to-Point XEB

- 2 XEB RF modems (matched pair)
- 2 half-wave, 2.5 dBi dipole antennas
- 2 6VDC/110VAC power adapters (Commercial only)
- 2 12VDC/110VAC power adapters (Industrial only)
- 2 Power over Ethernet injectors (Industrial only)


Multipoint XEB

- 1 XEB RF modem
- Accessories Kit also includes:
 - 1 half-wave, 2.5 dBi dipole antenna
 - 1 6VDC/110VAC power adapter (Commercial only)
 - 1 12VDC/110VAC power adapter (Industrial only)
 - 1 Power over Ethernet injector (Industrial only)



ENVIRONMENTAL

- Operating temperature: -40° C to 70° C

XPress Ethernet Bridge
Indoor - Front



XPress Ethernet Bridge
Indoor - Back

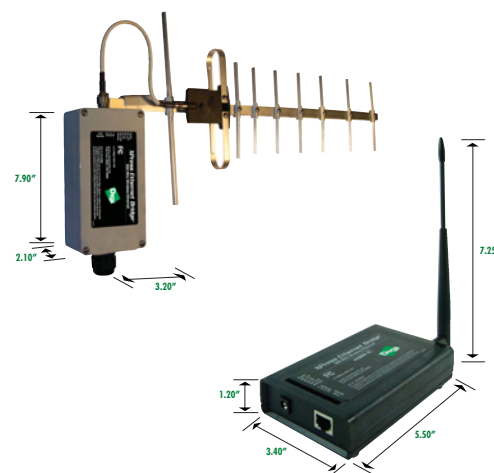

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

WHEN
RELIABILITY
MATTERS™

Digi International

11001 Bren Road E.
 Minnetonka, MN 55343
 U.S.A.
 PH: 877-912-3444
 952-912-3444
 FX: 952-912-4952
 email: info@digi.com

Digi International France

31 rue des Poissonniers
 92200 Neuilly sur Seine
 PH: +33-1-55-61-98-98
 FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
 22-14 Sakuragaoka-cho,
 Shibuya-ku
 Tokyo 150-0031, Japan
 PH: +81-3-5428-0261
 FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F,
 K Wah Centre
 191 Java Road
 North Point, Hong Kong
 PH: +852-2833-1008
 FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

© 2005-2007 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo and XPress are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders.

91001402
 B2/1107

