



THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2005, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	3 ~ 16	Vdc
RATED CURRENT (MAX)	120	mA
MINIMUM SPL @ 10 CM	110	dBA
RESONANT FREQUENCY	1100/2800±200	Hz
TONE OR PULSE RATE	SIREN	1.2 PULSE PER SECOND
OPERATING TEMPERATURE	-30 ~ +80	°C
STORAGE TEMPERATURE	-40 ~ +80	°C
HOUSING MATERIAL	ABS	—
TERMINAL MATERIAL	LEAD WIRES	—
WEIGHT	49	grams

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	6/5/06	

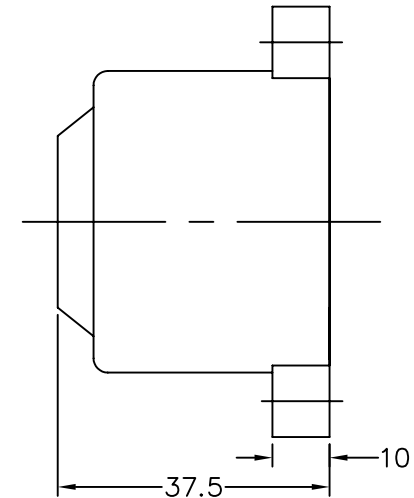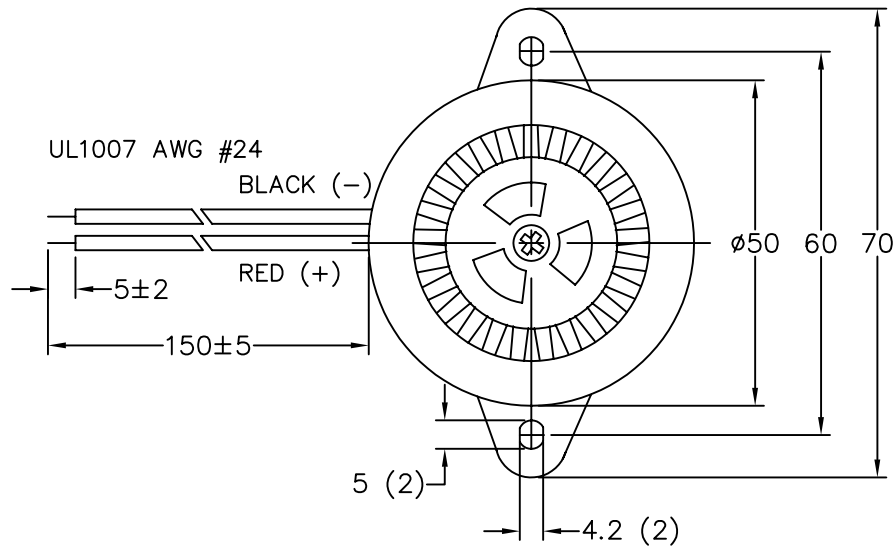

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME
XL-5020-TF-LW150-S-R.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.

APPROVALS	DATE
DRAWN J.D.	6/06
CHECKED E.P.	6/06
APPROVED B.R.	6/06

DO NOT SCALE DRAWING



projects®
unlimited

Dayton , Ohio

INDICATOR

SIZE A DRAWING NO. XL-5020-TF-LW150-S-R

SCALE: N.T.S.

SHEET 1 OF 1