


High Precision Surface Mount 4 Resistor Network Dual-In-Line Package with TCR Tracking $\leq 0.5 \text{ ppm}/^{\circ}\text{C}$, Tolerance Match of 0.01 % and Ratio Stability of 0.005 %

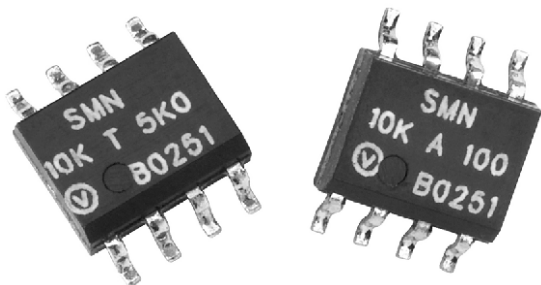

Any value and any ratio available within resistance range

INTRODUCTION

Bulk Metal® Foil (BMF) Technology outperforms all other resistor technologies available today for applications that require High Precision and High Stability.

This technology has been pioneered and developed by Vishay, and products based on this technology are the most suitable for a wide range of applications.

BMF technology allows us to produce Customer Orientated products designed to satisfy challenging and specific technical requirements.

Model SMN offers low TCR (absolute and tracking), excellent load life stability, tight tolerance (absolute and match), excellent ratio stability, low thermal EMF, low current noise and low voltage coefficient - **all in the same resistor**.

The SMN Surface Mount Network is made up of 4 independent BMF resistors in a small standard molded epoxy package with 50 MIL lead pitch (JEDEC MS-012 package).

The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched sets. The resistor may be used independently or as divider pairs.

Our Application Engineering Department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

TABLE 1 - RESISTANCE VALUES AND TOLERANCES

(Tighter performances are available)

RESISTANCE VALUES	100 Ω - 10 k Ω per resistor
ABSOLUTE TOLERANCE EACH RESISTOR	$\pm 0.02 \%$, $\pm 0.05 \%$, $\pm 0.1 \%$
RESISTANCE TOLERANCE MATCH	0.01 %, 0.02 %, 0.05 %

FEATURES

- Temperature Coefficient of Resistance (TCR) (- 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$, + 25 $^{\circ}\text{C}$ Ref):
Absolute: $\pm 2 \text{ ppm}/^{\circ}\text{C}$ typical (see table 2)
Tracking: 0.5 $\text{ppm}/^{\circ}\text{C}$ typical (see table 2)
- Power Rating: at 70 $^{\circ}\text{C}$
Entire Package: 0.4 W
Each Resistor: 0.1 W
- Resistance Tolerance Match: 0.01 %
- Ratio Stability: 0.005 % (0.1 W at 70 $^{\circ}\text{C}$, 2000 hours)
- Large Variety of Resistance Ratios
- Electrostatic Discharge (ESD) above 25 000 Volts
- Short Time Overload $\leq 0.0025 \%$
- Non Inductive, Non Capacitive Design
- Rise Time: 1 ns without ringing
- Current Noise: < - 40 dB
- Thermal EMF: 0.05 $\mu\text{V}/^{\circ}\text{C}$
- Voltage Coefficient < 0.1 ppm/V
- Non Inductive: < 0.08 μH
- Non Hot Spot Design
- Terminal Finishes available: Lead (Pb)-free
Tin/Lead Alloy
- For better performances please contact us
- Available with Z-Foil technology, please see SMNZ datasheet



APPLICATIONS

- Instrumentation Amplifiers
- Bridge Networks
- Differential Amplifiers
- Ratio Arms in Bridge Circuits
- Medical and Test Equipment
- Military
- Airborne etc.






FIGURE 1 - SCHEMATICS¹⁾

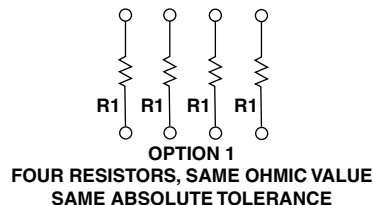

Note

1. Different schematics are available (R1, R2, R3, R4)

* Pb containing terminations are not RoHS compliant, exemptions may apply

High Precision Surface Mount 4 Resistor Network
Dual-In-Line Package with TCR Tracking $\leq 0.5 \text{ ppm}/^{\circ}\text{C}$,
Tolerance Match of 0.01% and Ratio Stability of 0.005%

Vishay Foil Resistors

FIGURE 2 - POWER DERATING CURVE

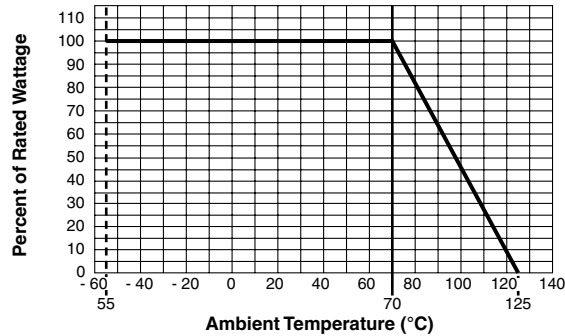


FIGURE 4 - TYPICAL TCR CURVE

(For more details, see table 2)

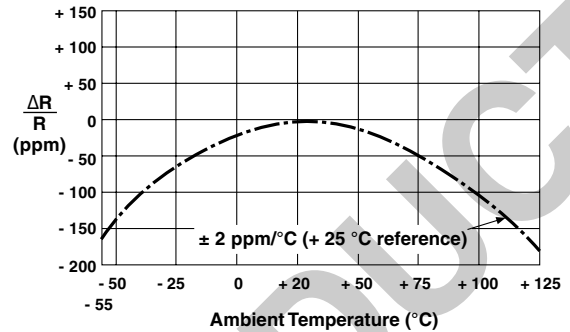


FIGURE 3 - DIMENSIONS AND IMPRINTING
EXAMPLE in inches (millimeters)


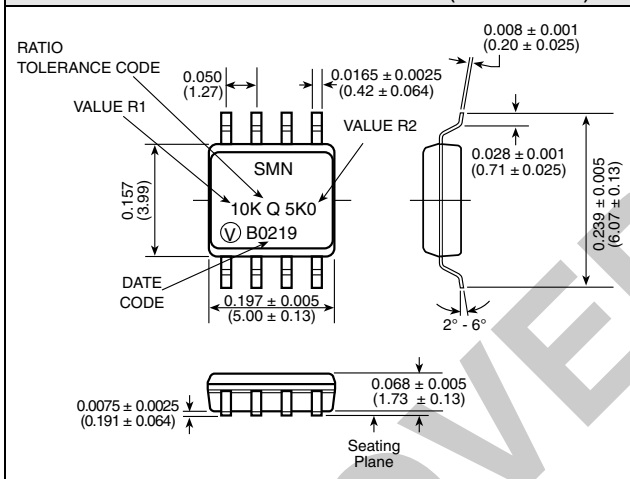



FIGURE 5 - TRIMMING TO VALUES

(Conceptual Illustration)

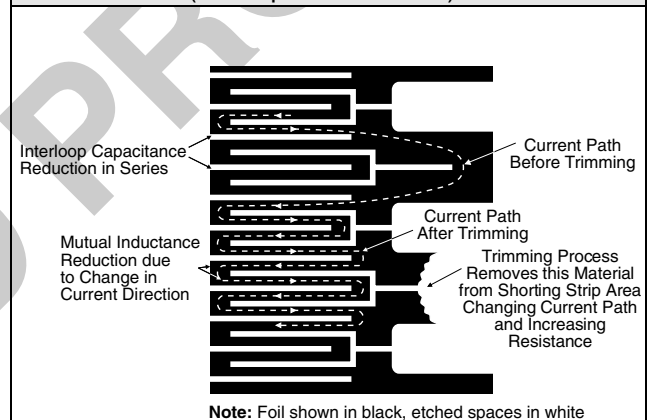

Note: Foil shown in black, etched spaces in white

FIGURE 6 - LAND PATTERN in inches (millimeters)

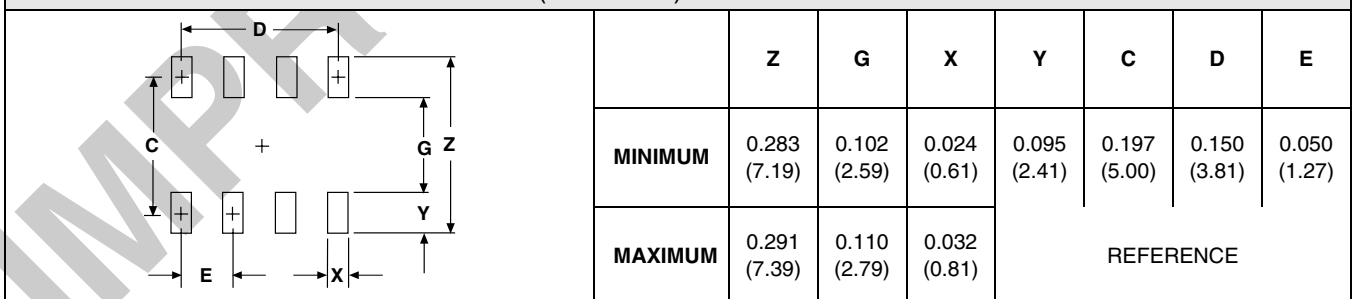

Vishay Foil Resistors High Precision Surface Mount 4 Resistor Network
Dual-In-Line Package with TCR Tracking $\leq 0.5 \text{ ppm/}^\circ\text{C}$,
Tolerance Match of 0.01 % and Ratio Stability of 0.005 %

TABLE 2 - PERFORMANCE SPECIFICATIONS (Per MIL-PRF 914 Test Methods)

SPECIFICATIONS	TYPICAL LIMITS
Power Rating at + 70 °C	Each resistor: 0.1 watts Entire package: 0.4 watts
Maximum Working Voltage (each resistor)	$(P \times R)^{1/2}$
TCR - 55 °C to + 125 °C (25 °C reference)	Absolute (typical and max. spread): $\pm 2 \pm 3 \text{ ppm/}^\circ\text{C}$ Tracking (maximum): For $R1/R2 = 1$ 1.0 ppm/°C For $1 < R1/R2 \leq 10$ 2.0 ppm/°C For $10 < R1/R2 \leq 100$ 3.0 ppm/°C
Thermal Shock 25 x (- 65 °C to + 125 °C)	$\Delta R = 0.01 \%$ (100 ppm) $\Delta \text{Ratio} = 0.01 \%$ (100 ppm)
Thermal Shock 5 x (- 65 °C to + 125 °C) and Power Conditioning 1.5 rated power at 25 °C, 100 hours	$\Delta R = 0.02 \%$ (200 ppm) $\Delta \text{Ratio} = 0.015 \%$ (150 ppm)
DWV Atm. Pressure 200 V (A.C), 1 minute	Successfully passed
Insulation Resistance 100 V (D.C), 1 minute	$> 10^4 \text{ M}\Omega$
Resistance to Soldering Heat	$\Delta R = 0.01 \%$ (100 ppm) $\Delta \text{Ratio} = 0.005 \%$ (50 ppm)
Moisture Resistance + 65 °C to - 10 °C; 90 % to 98 % RH; 0.1 x rated power; 240 hours	$\Delta R = 0.02 \%$ (200 ppm) $\Delta \text{Ratio} = 0.005 \%$ (50 ppm)
Shock (Specified Pulse) 100G	$\Delta R = 0.01 \%$ (100 ppm) $\Delta \text{Ratio} = 0.01 \%$ (100 ppm)
Vibration, High Frequency (10 Hz - 2000 Hz), 20G	$\Delta R = 0.005 \%$ (50 ppm) $\Delta \text{Ratio} = 0.005 \%$ (50 ppm)
High Temperature Exposure 100 hours at 125 °C	$\Delta R = 0.01 \%$ (100 ppm) $\Delta \text{Ratio} = 0.005 \%$ (50 ppm)
Low Temperature Storage 24 hours at - 65 °C	$\Delta R = 0.005 \%$ (50 ppm) $\Delta \text{Ratio} = 0.005 \%$ (50 ppm)
Load Life Stability at 70 °C; 0.1 watt per resistor, 2000 hours	$\Delta R = 0.005 \%$ (50 ppm) $\Delta \text{Ratio} = 0.005 \%$ (50 ppm)
Short Time Overload 6.25 x Rated Power; 5 seconds	$\Delta R = 0.005 \%$ (50 ppm) $\Delta \text{Ratio} = 0.0025 \%$ (25 ppm)
Weight	0.08 g




High Precision Surface Mount 4 Resistor Network
Dual-In-Line Package with TCR Tracking $\leq 0.5 \text{ ppm}/^{\circ}\text{C}$,
Tolerance Match of 0.01% and Ratio Stability of 0.005%

Vishay Foil Resistors

TABLE 3 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y1365V0204QT9W (preferred part number format)

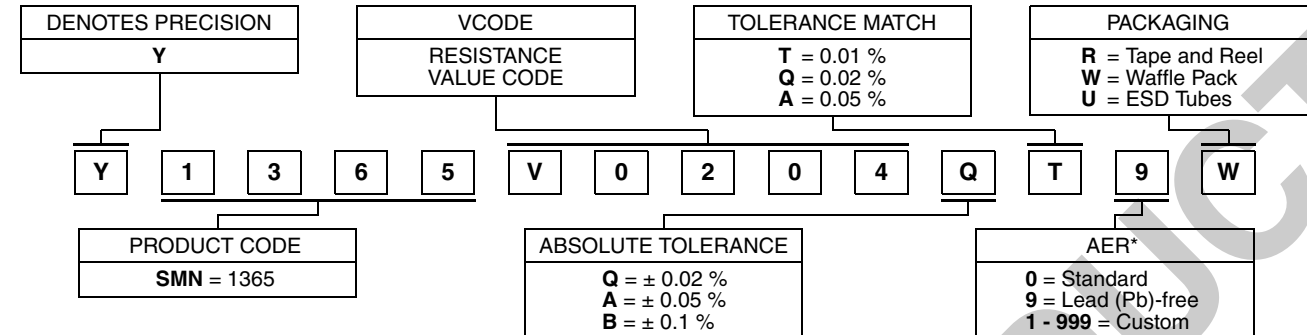

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1365 V0204 Q T 9 W:

TYPE: SMN

VALUES: 10K/500R

ABSOLUTE TOLERANCE: $\pm 0.02 \%$

TOLERANCE MATCH: 0.01 %

TERMINATION: Lead (Pb)-free

PACKAGING: Waffle Pack

HISTORICAL PART NUMBER: SMN 10K/500R TCR2 Q T S W (will continue to be used)

SMN	10K/500R	TCR2	Q	T	S	W
MODEL	RESISTANCE VALUE	ABSOLUTE TCR	ABSOLUTE TOLERANCE	TOLERANCE MATCH	TERMINATION	PACKAGING
SMN	R ₁ = 10 k Ω R ₂ = 500 Ω	TCR2	Q = $\pm 0.02 \%$ A = $\pm 0.05 \%$ B = $\pm 0.1 \%$	T = 0.01 % Q = 0.02 % A = 0.05 %	S = Lead (Pb)-free B = Tin/Lead	T = Tape and Reel W = Waffle Pack U = ESD Tubes

Note

* For non-standard requests, please contact Application Engineering.

TABLE 4 - RESISTANCE VALUE CODE LIST FOR POPULAR RATIOS

VCODES	R1/R2 RATIO	R1	R2	VCODES	R1/R2 RATIO	R1	R2
V0201	100	10K	100R	V0189	2.5	1K	400R
V0202	50	10K	200R	V0185		500R	200R
V0197		5K	100R	V0207		10K	5K
V0203	25	10K	400R	V0175		2K	1K
V0198		5K	200R	V0190	2	1K	500R
V0204	20	10K	500R	V0182		400R	200R
V0193		2K	100R	V0179		200R	100R
V0205		10K	1K	V0186	1.25	500R	400R
V0194	10	2K	200R	V0178		100R	100R
V0187		1K	100R	V0180		200R	200R
V0200		5K	1K	V0183		400R	400R
V0195	5	2K	400R	V0023	1	500R	500R
V0188		1K	200R	V0191		1K	1K
V0184		500R	100R	V0176		2K	2K
V0196	4	2K	500R	V0019		5K	5K
V0181		400R	100R	V0008		10K	10K

Note

- Other values available upon request.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.