

Fuseholder Open Design, Holder for MSx 250, THT



250 VAC · 6.3 A (UL/CSA)

**Description**

- Through hole mounting

**Standards**

- UL 512  
- CSA C22.2 no. 39

**References**

General Product Information

Sicherungshalter zu MSF 250; MST 250; MSTU 250; MSU 250; MXT 250


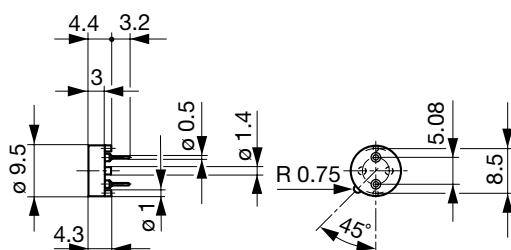
**Weblinks**

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check,  
Distributor-Stock-Check

**Technical Data**

|                              |                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------|
| Fuse-Link                    | Microfuse 250 V                                                                                 |
| Mounting                     | PCB                                                                                             |
| Terminal                     | Solder THT                                                                                      |
| Rated Voltage                | 250 VAC                                                                                         |
| Rated Current                | 6.3 A (UL/CSA)                                                                                  |
| Degree of Protection         | IP 30                                                                                           |
| Admissible Ambient Air Temp. | -40 °C to 85 °C                                                                                 |
| Climatic Category            | 40/085/21 acc. to IEC 60068-1                                                                   |
| Material: Socket             | Thermoplastic, Beige, UL 94V-0                                                                  |
| Material: Terminals          | Tin-Plated Copper Alloy                                                                         |
| Unit Weight (Socket/Cap)     | 0.37 g                                                                                          |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.                                                                    |
| Product Marking              |  , Approvals |

|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Soldering Methods            | Wave                                                       |
| Solderability                | 235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1   |
| Resistance to Soldering Heat | 260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A |
| Contact Resistance           | < 7 mΩ at 20 mV                                            |
| Dielectric Strength          | > 3 kV between L-N (50 Hz; 1 min)                          |
| Impulse Withstand Voltage    | > 4 kV between L-N                                         |
| Insulation Resistance        | > 10 MΩ between L-N (500 VDC; 1 min)                       |
| Overvoltage Category         | I - III acc. to IEC 60664-1                                |
| Pollution Degree             | 1 - 3 acc. to IEC 60664-1                                  |

**Dimensions**Length  7.6 mm

Drilling Diagram

**Variants**

| Holder | Order Number |
|--------|--------------|
| •      | 0031.7601    |

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

**Packaging Unit**

Plastic box (100 pcs.)