


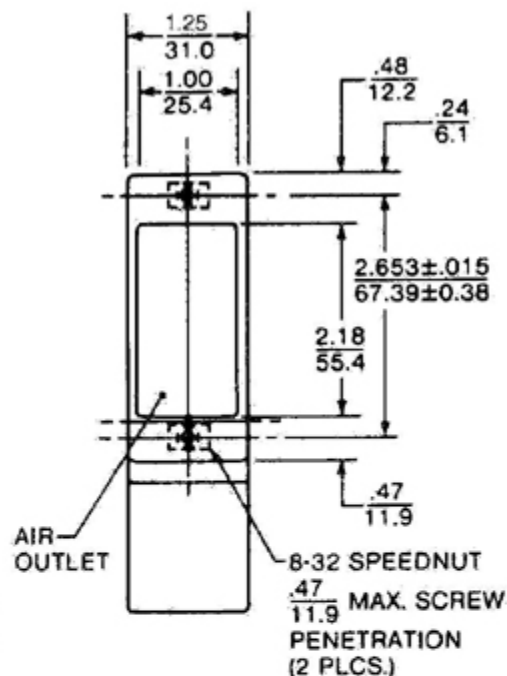
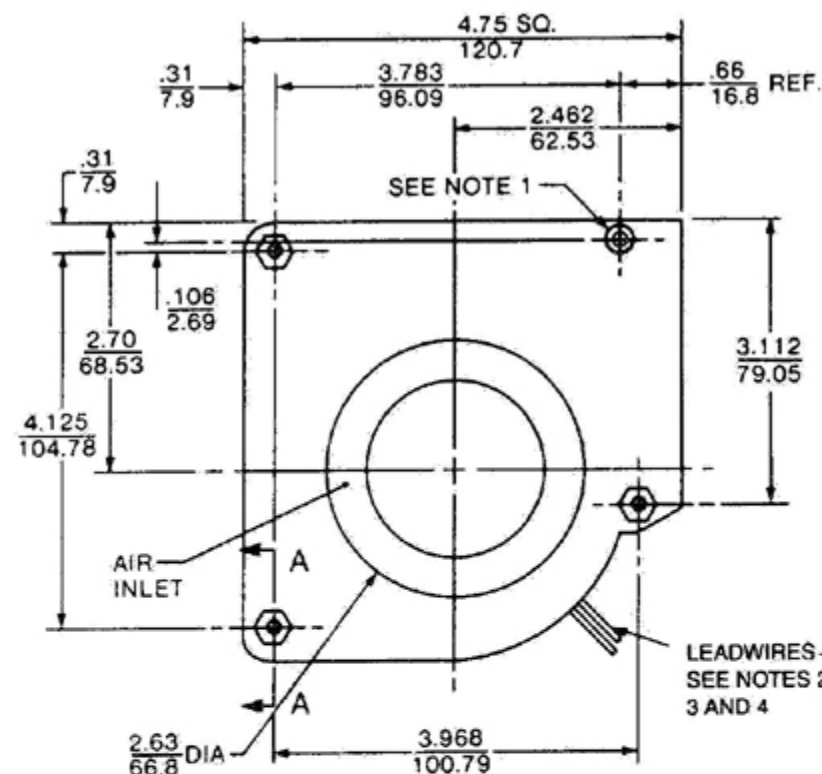


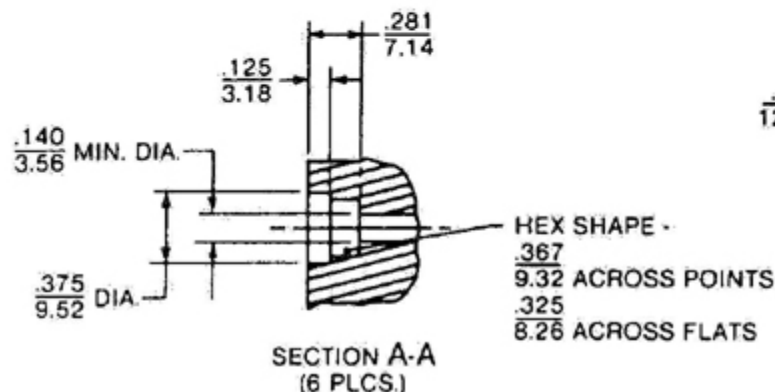

- NOTES:
1. NOT INTENDED FOR USE AS MOUNTING HOLE
  2. ALL LEADWIRES 22 AWG, U.L. STYLE 1061
  3. POWER LEADS (-) BLACK (+) RED
  4. NON-INSULATED TACHOMETER OUTPUT (WHEN SPECIFIED), ADDS ONE ADDITIONAL BLUE WITH WHITE TRACER LEAD (SAME LENGTH AS POWER LEADS). (SEE PAGE 60 FOR DETAILS.)

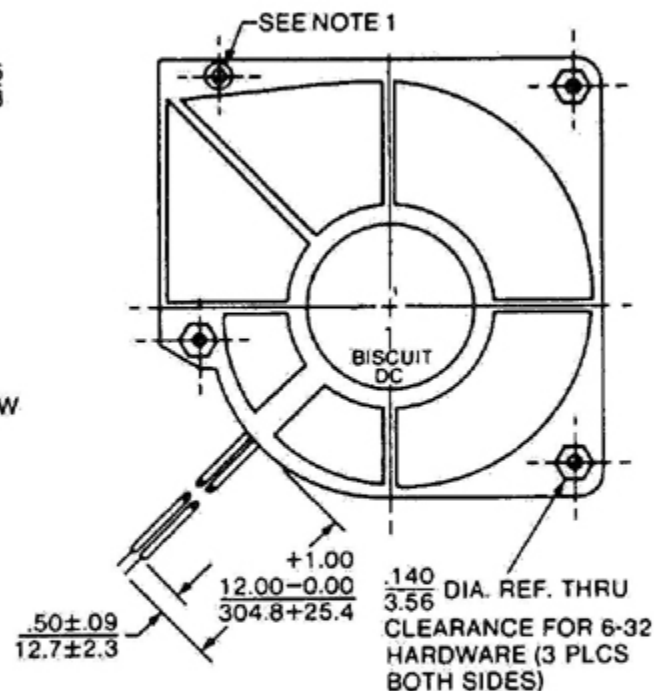

TACHOMETER OUTPUT WAVE FORM



\*AMPLITUDES UP TO NOMINAL OPERATING VOLTAGE OR OPEN COLLECTOR AVAILABLE CONSULT APPLICATION ENGINEERING

CAUTION:

- 1) ON ALL THIRD WIRE MODELS, THE THIRD WIRE MUST NOT BE APPLIED TO EITHER + OR - POWER LEADS
- 2) THIRD WIRE SENSOR'S GROUND REFERENCE MUST BE THE SAME AS THE FANS.

DIMENSIONS:  $\frac{\text{in}}{\text{mm}} \pm$

TOLERANCES: .xx= .03  
0.8

.xxx=.010  
ANGULAR±2° .25  
(UNLESS NOTED)