

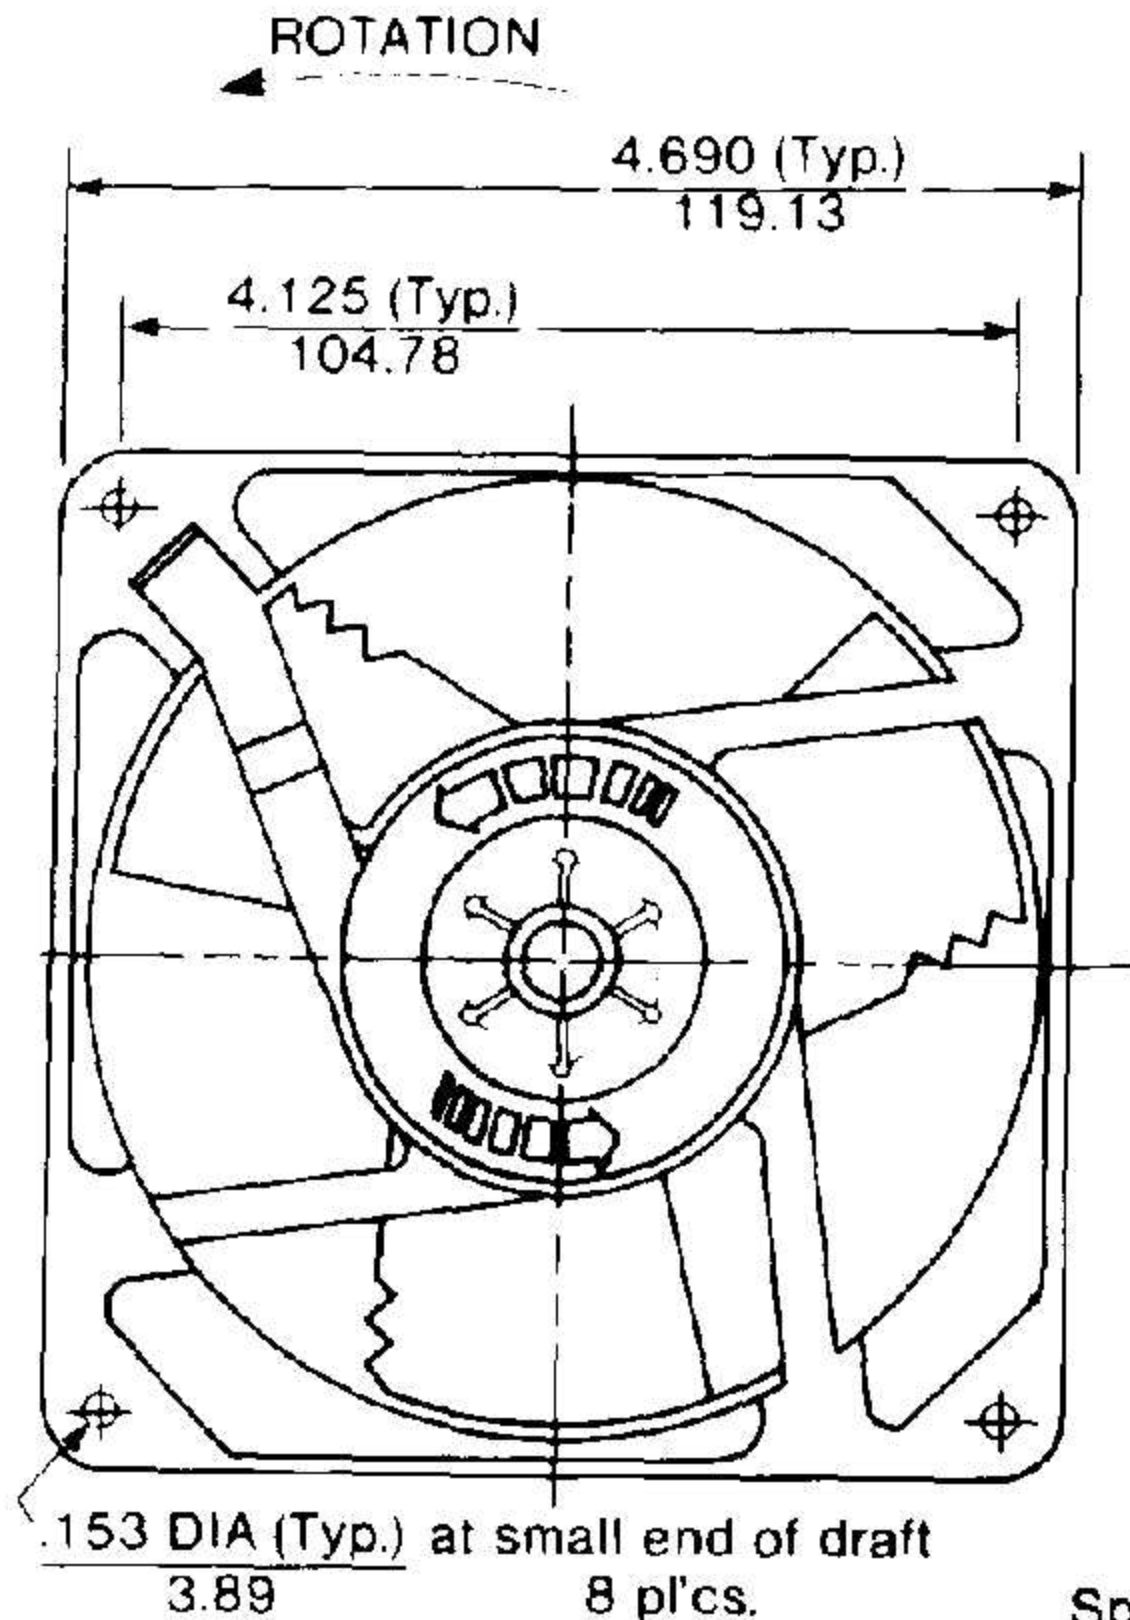
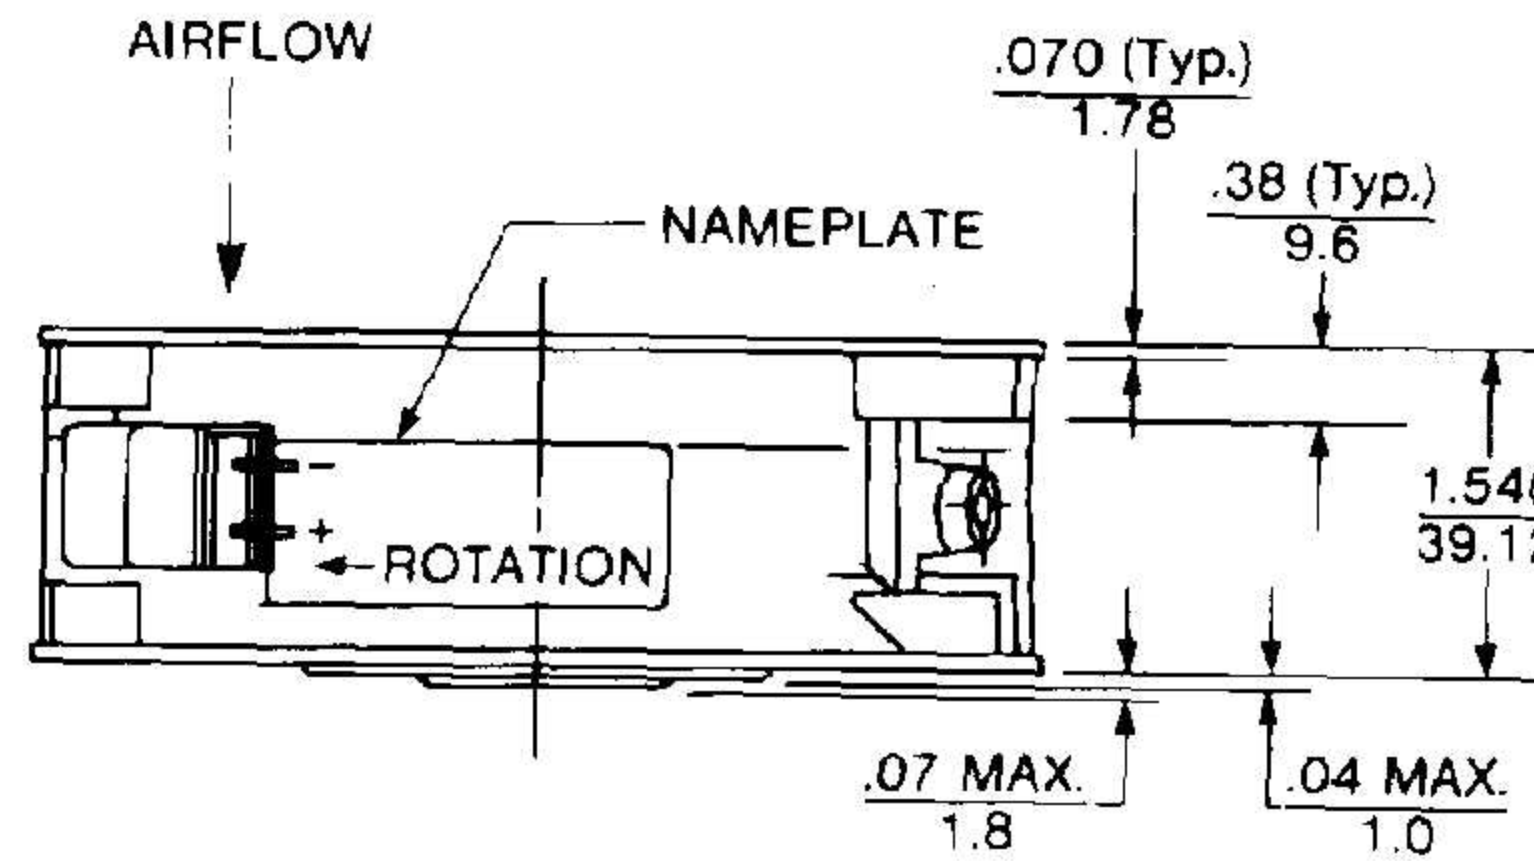
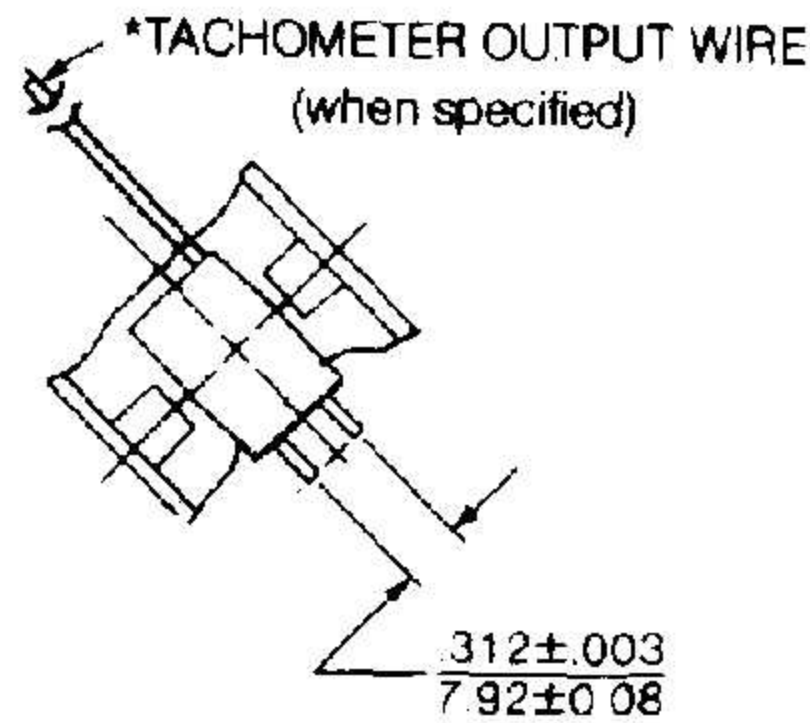
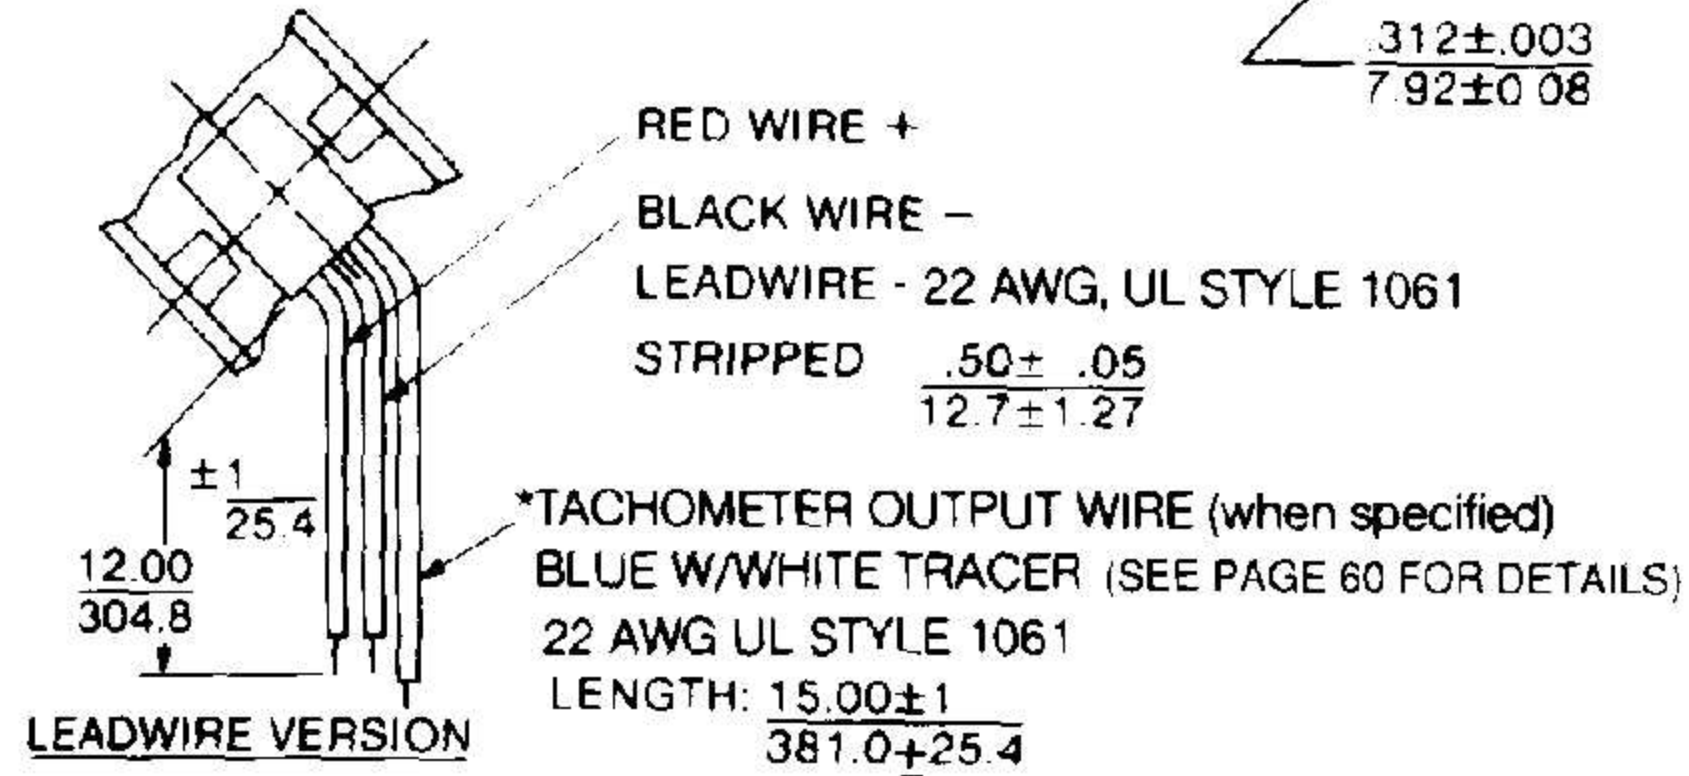


TERMINAL VERSION


TERMINALS:
 $.120 \pm .002 / 3.05 \pm 0.05$ WIDE
 $.020 \pm .001 / 0.51 \pm 0.03$ THICK
 $300 \pm .020 / 7.62 \pm 0.51$ LONG
(WILL FIT AMP SERIES 110 TERMINALS OR EQUIVALENT)

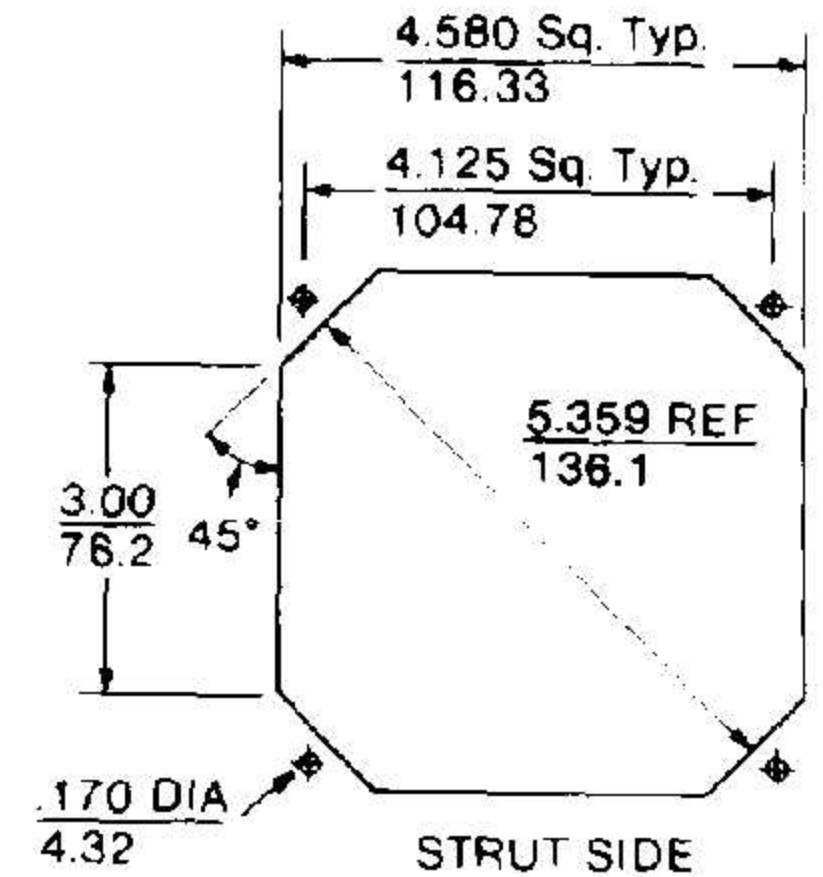

RECOMMENDED CUT OUT

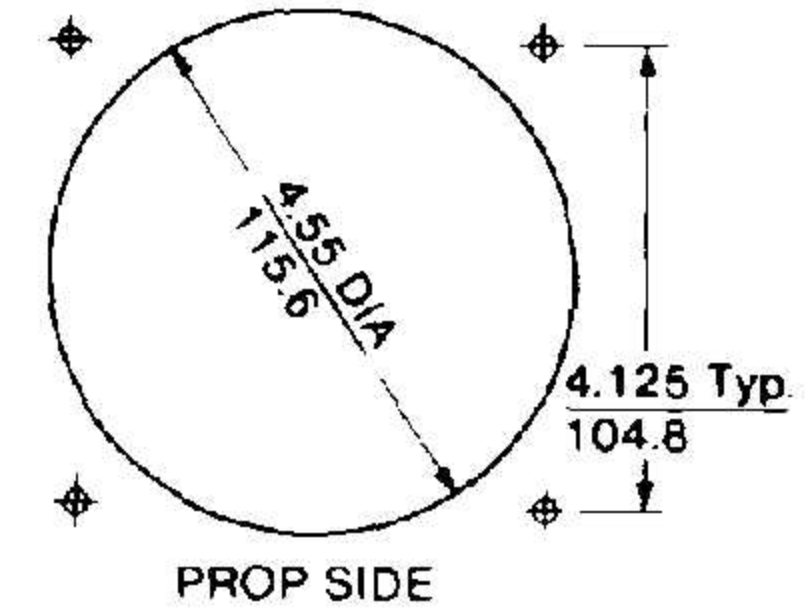

TACHOMETER OUTPUT WAVE FORM

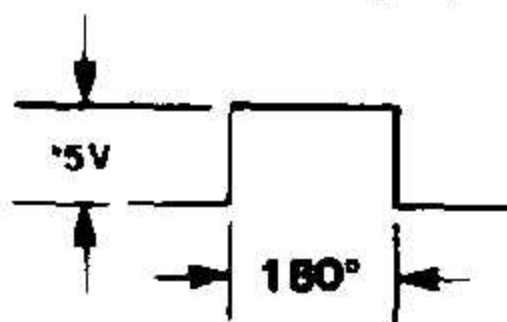

*AMPLITUDES UP TO NOMINAL
 OPERATING VOLTAGE OR
 OPEN COLLECTOR AVAILABLE
 CONSULT APPLICATION
 ENGINEERING.

CAUTION.

- 1) ON ALL TACHOMETER MODELS THE
 THIRD WIRE MUST NOT BE APPLIED
 TO EITHER + OR - POWER LEADS
- 2) THIRD WIRE SENSOR'S GROUND
 REFERENCE MUST BE THE SAME
 AS THE FANS

DIMENSIONS: $\frac{\text{in}}{\text{mm}} \pm$
 TOLERANCES: $.xx = \frac{.03}{0.8}$
 $.xxx = \frac{.010}{.25}$
 ANGULAR $\pm 2^\circ$
 (UNLESS NOTED)

Specifications subject to change without notice.