


$\square \frac{4.73 \pm .04}{120.1 \pm 1}$

$\square \frac{4.12}{104.6}$   
TYP.

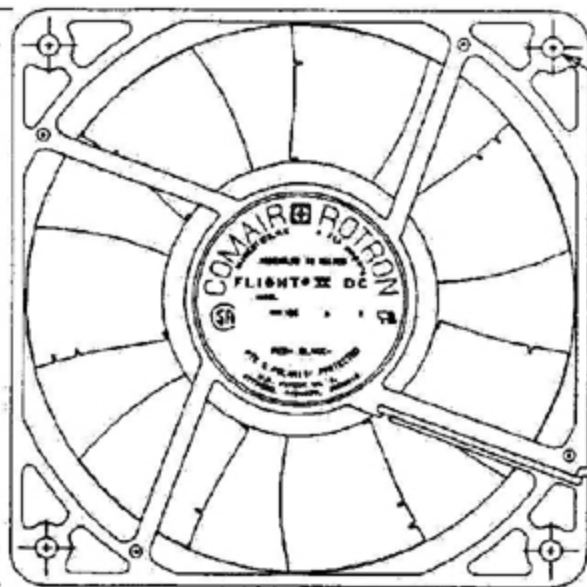

ROTATION


8X  $\phi 0.177$   
(at small end of draft)

$\frac{+1.00}{12.00-0.00}$   
 $\frac{304.8+25.4}{12.7 \pm 2.3}$

$\frac{0.50 \pm .09}{12.7 \pm 2.3}$



LEADWIRES 22 AWG  
UL STYLE 1061  
(-) BLACK, (+) RED

$\frac{0.19}{4.8}$   $\frac{1.00}{25.4}$   $\frac{0.19}{4.8}$

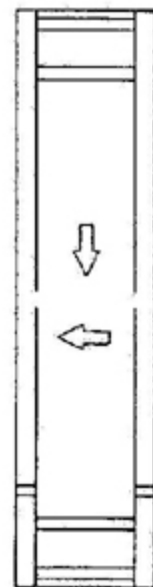

AIRFLOW

RECOMMENDED CUTOUT

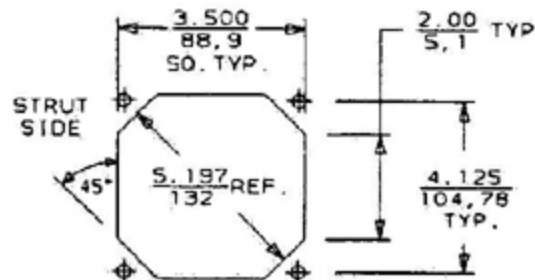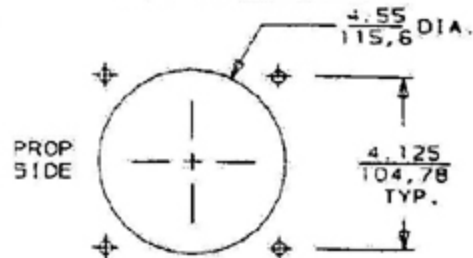

DIMENSIONS:  $\frac{1}{16}$  mm  $\pm$

TOLERANCES: .XX=  $\frac{0.03}{0.8}$

TOLERANCES: .XXX=  $\frac{0.010}{0.25}$