


0327/0351/0373




Basic Part Number	Length L	Depth N
0327-0	5,23	4,57
0351-0	5,74	5,08
0373-0	6,86	6,12

03XX-0-15-XX-34-XX-10-0

Solder mount in 1,91 min. mounting hole


0328



0328-0-15-XX-34-XX-10-0

Hex press-fit in 2,01 plated thru hole


0334

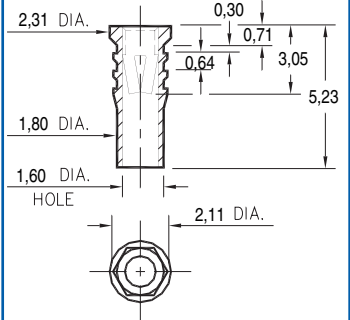

0334-0-15-XX-34-XX-10-0

Hex press-fit in 2,01 plated thru hole


0312



0312-0-15-XX-34-XX-10-0

Solder mount in 1,91 min. mounting hole


0333



0333-0-42-XX-34-XX-10-0

Press-fit in 1,93 mounting hole


0357



0357-0-15-XX-34-XX-10-0

Press-fit in 1,98 mounting hole


0317

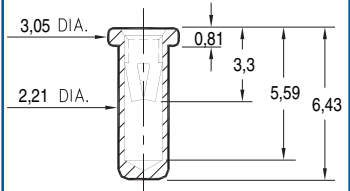

0317-0-15-XX-34-XX-10-0

Solder mount in 2,31 min. mounting hole


0340



0340-0-15-XX-34-XX-10-0

Solder mount in 2,21 min. mounting hole


0345



0345-0-15-XX-34-XX-10-0

Press-fit in 2,26 mounting hole


0316



0316-0-15-XX-34-XX-10-0

Solder mount in 2,21 min. mounting hole

0314

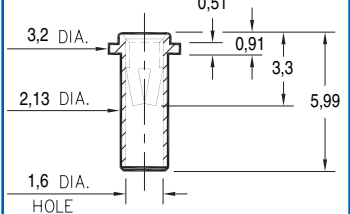

0314-0-15-XX-34-XX-10-0

Solder mount in 2,21 min. mounting hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: XXXX - X - XX - XX - 34 - XX - 10 - 0

BASIC PART # _____

SPECIFY SHELL FINISH: _____

01 5,08 μ m TIN/LEAD OVER NICKEL

80 5,08 μ m TIN OVER NICKEL $\diamond$

15 0,25 μ m GOLD OVER NICKEL $\diamond$

SPECIFY CONTACT FINISH: _____

01 5,08 μ m TIN/LEAD OVER NICKEL

80 5,08 μ m TIN OVER NICKEL $\diamond$

27 0,76 μ m GOLD OVER NICKEL $\diamond$



CONTACT

#34 CONTACT (DATA ON PAGE 212)