



8210



8210-0-15-15-04-27-04-0
Press-fit in 0,61/0,68 stepped hole


0464



0464-X-15-XX-10-XX-04-0
Solder mount in 0,41 min. mounting hole


Basic Part Number	Length A
0464-0	3,18
0464-1	6,35

9225




9225-0-15-XX-10-XX-10-0
Press-fit in 1,0 mounting hole

0529

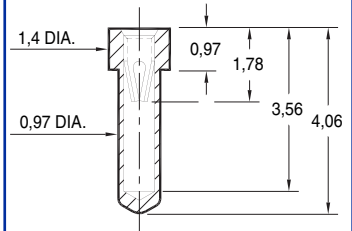

0529-0-15-XX-10-XX-10-0
1,02 min. mounting hole

8947



8947-0-15-XX-10-XX-10-0
Solder mount in 1,02 min. mounting hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

DIMENSION IN INCHES
TOLERANCES ON:
LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: XXXX - X - XX - XX - XX - XX - 0

BASIC PART # _____

SPECIFY SHELL FINISH:

01 5,08 μm TIN/LEAD OVER NICKEL

80 5,08 μm TIN OVER NICKEL $\diamond$

15 0,25 μm GOLD OVER NICKEL $\diamond$

SPECIFY CONTACT FINISH:

02 2,54 μm TIN/LEAD OVER NICKEL

84 2,54 μm TIN OVER NICKEL $\diamond$

27 0,76 μm GOLD OVER NICKEL $\diamond$

SELECT CONTACT

#04 or #10 CONTACT (DATA ON PAGE 205)

