



0489

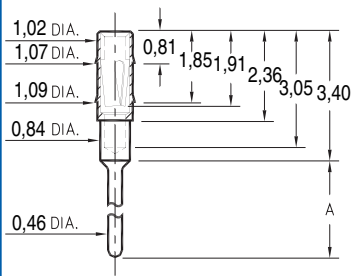

Basic Part Number	Length A
0489-0	2,59
0489-1	5,05
0489-2	7,59


0489-X-15-XX-11-XX-04-0
Press-fit in 1,04 mounting hole.

0463




0463-0-15-XX-21-XX-04-0
Press-fit in 1,09 mounting hole.
shell is Phos. Br. Alloy 544 (B2)

0466

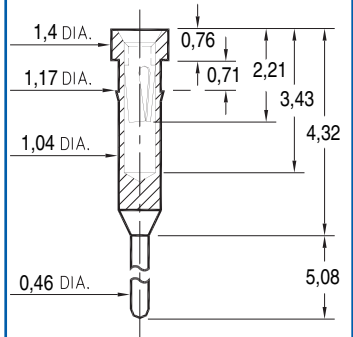


0466-0-15-XX-21-XX-04-0
Press-fit in 1,09 mounting hole.
shell is Phos. Br. Alloy 544 (B2)

7491




7491-0-15-XX-X1-XX-04-0
Press-fit in 1,07 mounting hole

0462




0462-0-15-XX-X1-XX-04-0
Press-fit in 1,09 mounting hole

0560




0560-0-15-XX-11-XX-10-0
Hex press-fit in 1,09 plated thru hole

5557

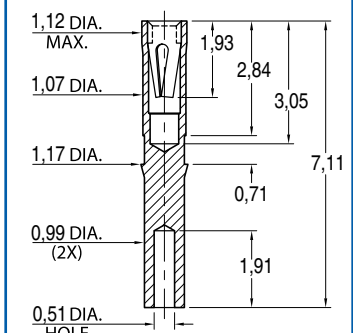


5557-0-19-XX-21-XX-10-0
Wire termination and Press-fit in 1,09 hole

5552



5552-0-15-XX-05-XX-10-0
Solder mount in 1,02 min. mounting hole

4890

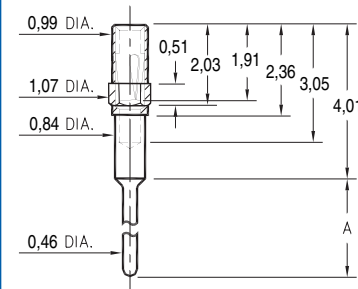

4890-X-15-XX-11-XX-04-0
Octagonal press-fit in 1,04 mounting hole.

Basic Part Number	Length A
4890-0	2,59
4890-1	5,05
4890-2	7,59

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: ± 0,13
DIAMETERS: ± 0,05
ANGLES: ± 2°

ORDER CODE: XXXX - X - XX - XX - XX - XX - XX - 0

BASIC PART # _____

SPECIFY SHELL FINISH: _____

01 5,08µm TIN/LEAD OVER NICKEL

80 5,08µm TIN OVER NICKEL ◇

15 0,25µm GOLD OVER NICKEL ◇

SPECIFY CONTACT FINISH: _____

02 2,54µm TIN/LEAD OVER NICKEL

84 2,54µm TIN OVER NICKEL ◇

27 0,76µm GOLD OVER NICKEL ◇

SELECT CONTACT

#05, #11 or #21 CONTACT (DATA ON PAGE 206 & 207)

