

Clip, 5 x 20 / 6.3 x 32 mm, UR



Variant 2

500 VAC · 2.5 W/10 A · 16 A (UL)

**Description**

- Through hole mounting
- Clip-material: bronze or brass
- Fuse block accepts 5x20 or 6.3x32 fuse-links

**Standards**

- IEC 60127-6
- UL 512
- CSA C22.2 no. 39

**Approvals**

- UL File Number: E39328

**References**

[General Product Information](#)


**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


**Technical Data**

|                              |                                                                                               |
|------------------------------|-----------------------------------------------------------------------------------------------|
| Fuse-Link                    | 5 x 20 or 6.3 x 32 mm                                                                         |
| Mounting                     | PCB                                                                                           |
| Terminal                     | Solder THT                                                                                    |
| Rated Voltage                | 500 VAC                                                                                       |
| Rated Current                | 16 A (UL)                                                                                     |
| Rated Power Acceptance IEC   | 2.5 W / 10 A @ Ta 23 °C                                                                       |
|                              | Admissible power acceptance at higher ambient temperature see derating curves                 |
| Degree of Protection         | IP 00                                                                                         |
| Admissible Ambient Air Temp. | -40 °C to 85 °C                                                                               |
| Climatic Category            | 40/085/21 acc. to IEC 60068-1                                                                 |
| Material: Terminals          | see variants                                                                                  |
| Unit Weight (Socket/Cap)     | 0.98 g                                                                                        |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.                                                                  |
| Product Marking              |  Approvals |



|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Soldering Methods            | Wave                                                       |
| Solderability                | 235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1   |
| Resistance to Soldering Heat | 260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A |
| Contact Resistance           | < 2.5 mΩ at 20 mV                                          |

**Dimensions**

Variant 0751.0056

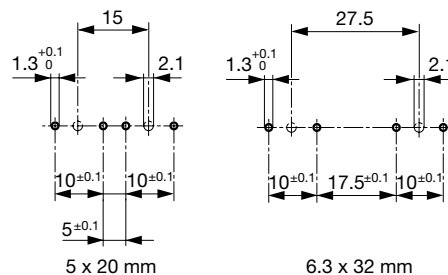


Drilling holes variant 0751.0056

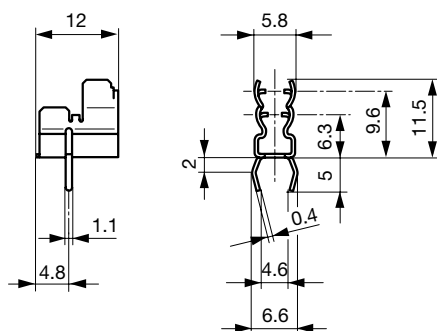

Variant 2 0751.0099, 0751.0100, 0751.0141 and 0751.0142

Drilling diagram variant 2 0751.0099, 0751.0100, 0751.0141 and 0751.0142

## Derating Curves for Fuseholders



## Variants



[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

| Clip | Terminal | Material: Terminals | Order Number |
|------|----------|---------------------|--------------|
| ●    | Straight | Tin-Plated Bronze ● | 0751.0056    |
| ●    | Kicked   | Tin-Plated Bronze ● | 0751.0099    |
| ●    | Kicked   | Tin-Plated Brass    | 0751.0100    |
| ●    | Straight | Tin-Plated Bronze ● | 0751.0141    |
| ●    | Straight | Tin-Plated Brass    | 0751.0142    |

**Packaging Unit** Bulk (1000 pcs.)