


INTEGRATED CONNECTOR MODULES

0811-2X4R-28-F 10/100Base-TX MagJack® 2 x 4




ELECTRICAL CHARACTERISTICS @ 25°C

RETURN LOSS (MIN.)	
1MHz-30MHz	-18 dB
60MHz-80MHz	-12 dB
INSERTION LOSS (MAX)	
100KHz TO 100MHz	-1.1 dB
OCL @ 0.1V, 100KHz	
8mA DC BIAS	350μH MIN.
TURNS RATIO	1CT : 1CT ±3%
XTALK	
100KHz TO 100MHz	-35 dB MIN.

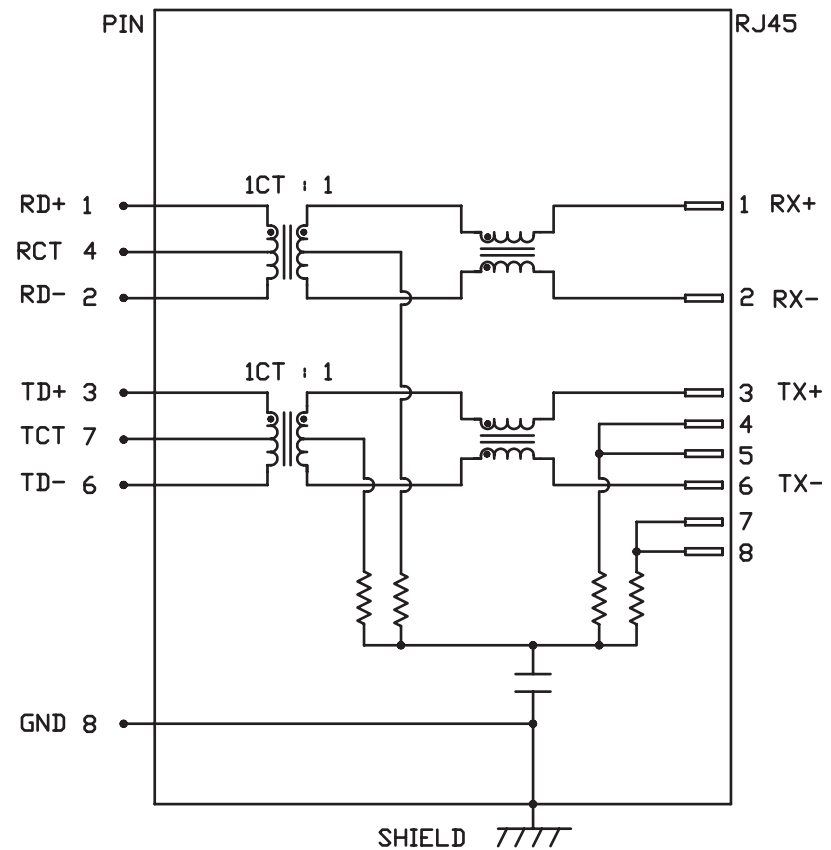

INTEGRATED CONNECTOR MODULES

0811-2X4R-28-F 10/100Base-TX MagJack® 2 x 4

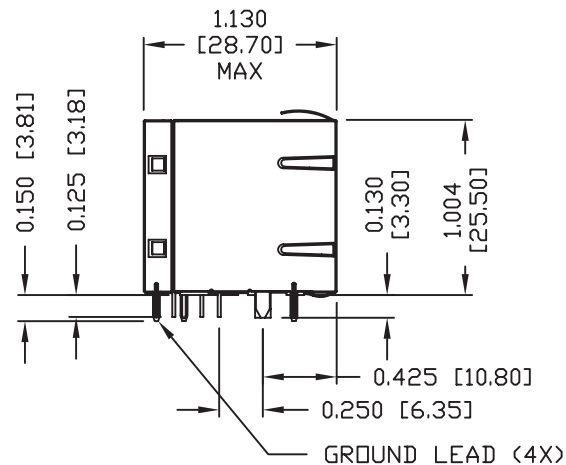


NOTES:

PLASTIC HOUSING: THERMOPLASTIC PBT
 FLAMMABILITY RATING UL 94V-0
 CONTACT PLATING: 30 MICRO-INCH HARD GOLD PLATING
 OUTPUT PINS: TIN-COATED COPPER WIRE, DIA 0.018 INCH.
 METAL SHIELD: NICKEL PLATED COPPER ALLOY. (ALL GROUND LEADS ARE SOLDER DIPAD)
 RoHS COMPLIANCE, PER EU DIRECTIVE 2002/95/EC.


1. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
2. MARK PART WITH MFG LOGO, MFG NAME, PART NUMBER, AND DATE CODE.

c  us UL RECOGNIZED - FILE #E196366 AND E169987.

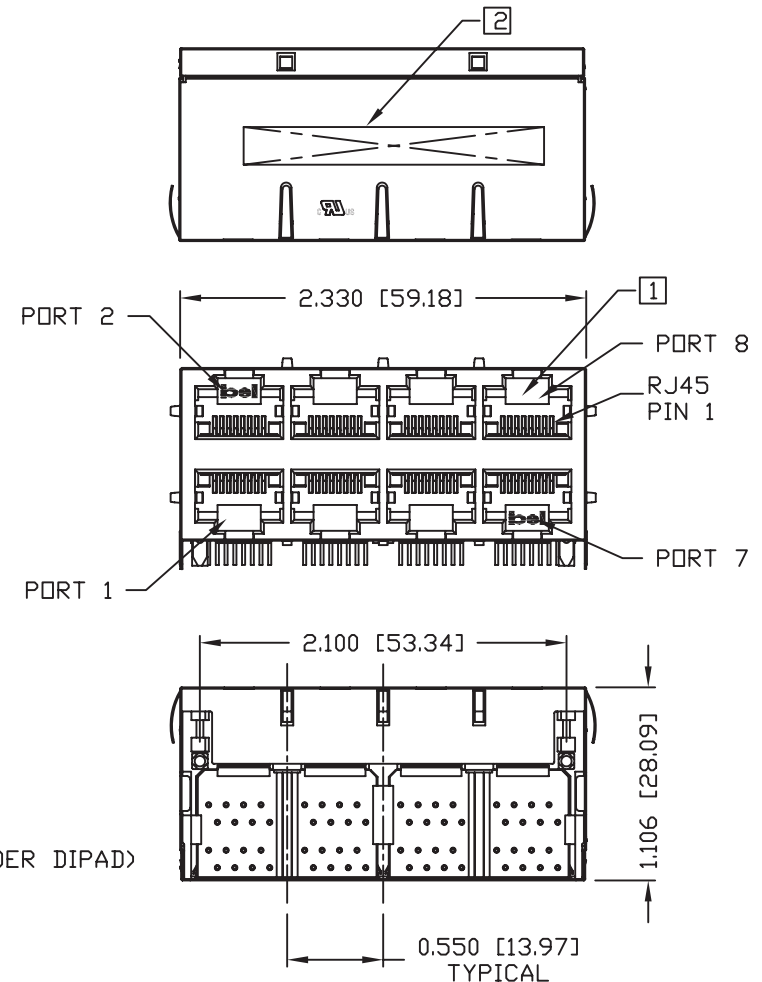


INTEGRATED CONNECTOR MODULES

0811-2X4R-28-F 10/100Base-TX MagJack® 2 x 4

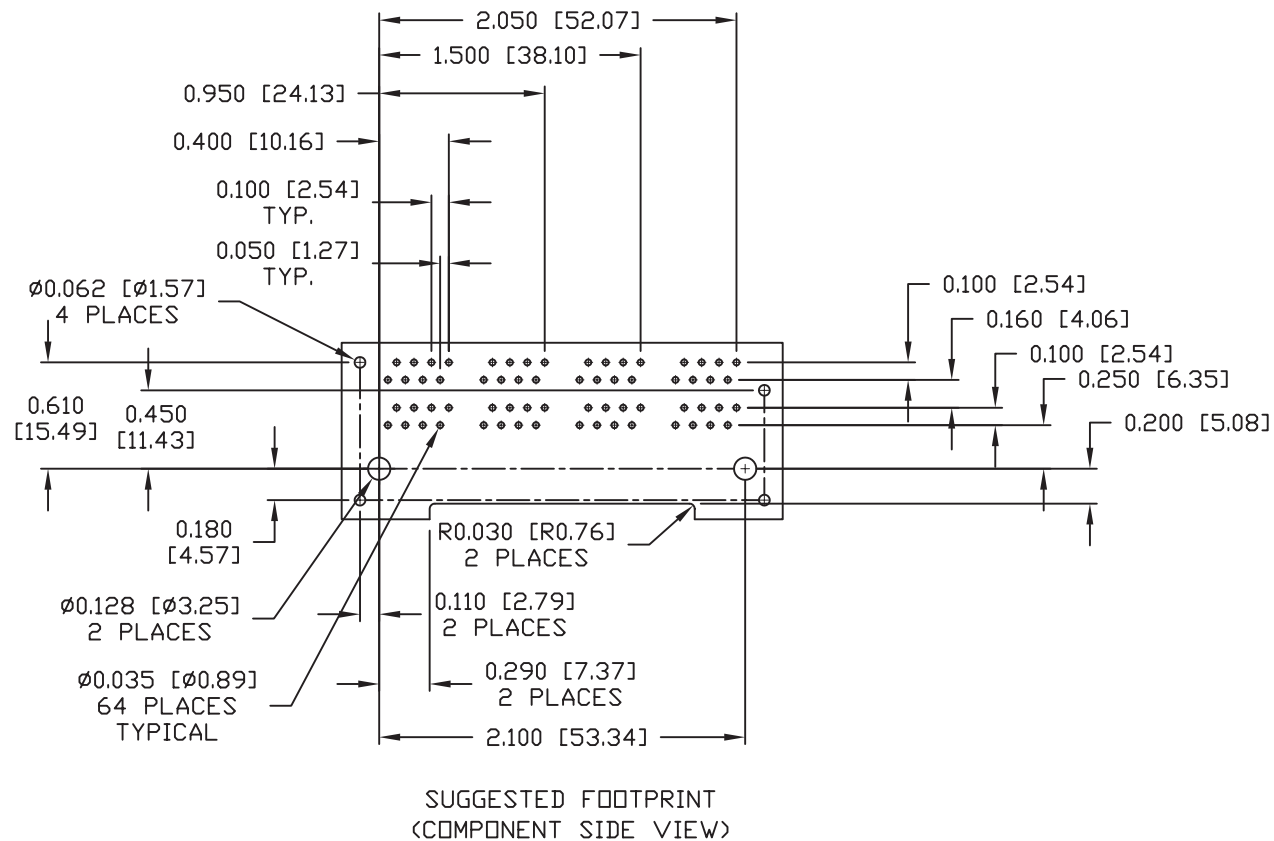

INTEGRATED CONNECTOR MODULES



0811-2X4R-28-F 10/100Base-TX MagJack® 2 x 4

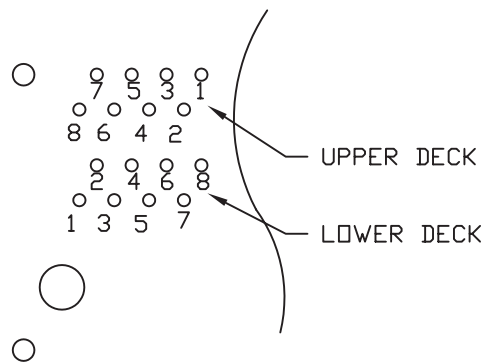

PIN-OUT INFORMATION
(COMPONENT SIDE VIEW)

8	GND
7	TCT
6	TD-
5	NC
4	RCT
3	TD +
2	RD -
1	RD +

PORT ASSIGNMENT
(COMPONENT SIDE VIEW)

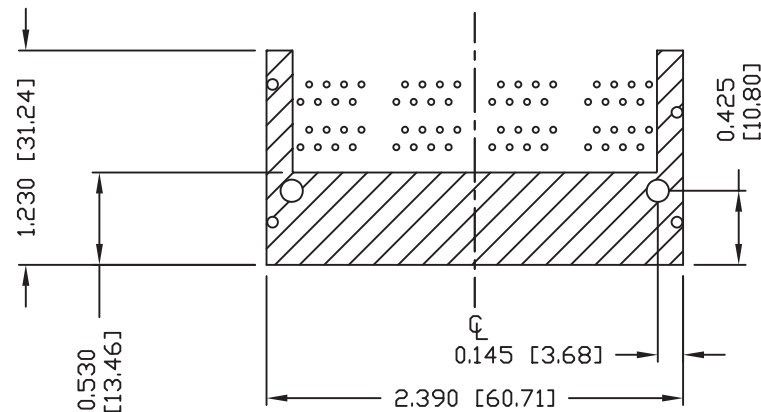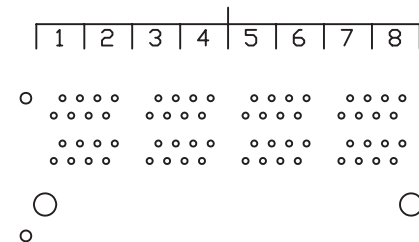


THE SHADED AREA ON THE CUSTOMER BOARD ARE
RECOMMENDED TO BE CLEAR OFF ANY VIA HOLE OR
COMPONENT PAD.

INTEGRATED CONNECTOR MODULES

0811-2X4R-28-F 10/100Base-TX MagJack® 2 x 4



SUGGESTED PANEL DANNING

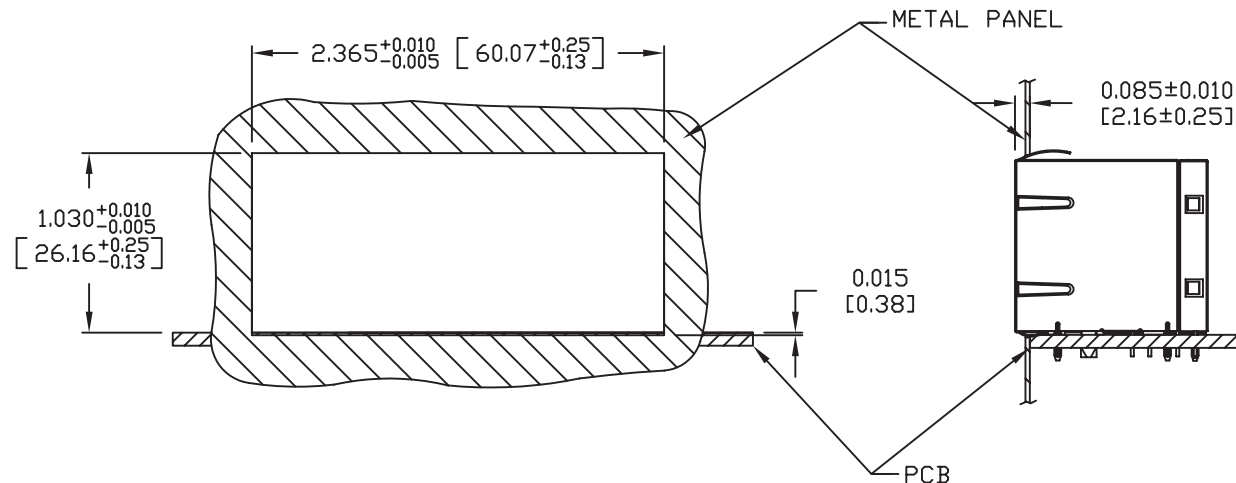

NOTES:

THE DISTANCE OF PANEL INSIDE SURFACE RELATIVE TO FRONT SURFACE OF PART IS ONLY A SUGGESTION. IN CASE THIS DISTANCE IS DIFFERENT, THE REQUIRED PANEL DANNING DIMENSIONS CHANGE ACCORDINGLY.

PACKING INFORMATION

PACKING TRAY : 0200-0148-46 (TOP)

0200-0148-47 (BOTTOM)

PACKING QUANTITY : 20 PCS FINISHED GOODS AR TRAY.

7 TRAYS (140 PCS FINISHED GOODS) AR CARTON BOX.

NOTE : CARDBOARDS ARE PLACED BETWEEN LAYERS OF PACKING TRAY INSIDE CARTON BOX.
(INCLUDE THE UPARMOST AND LOWERMOST TRAY)