



0980



0980-0-15-20-75-14-11-0

Double action, *.055 Combined Stroke
Mount between parallel circuit boards


0925



0925-0-15-20-73-14-26-0

Standard Stroke
Surface Mount


0930



0930-0-15-20-75-14-11-0

Standard Stroke
Solder Mount in .018 min. mounting hole


0932



0932-0-15-20-77-14-11-0

Long Stroke
Solder Mount in .027 min. mounting hole


0934



0934-0-15-20-74-14-26-0

Standard Stroke
Surface Mount


0923



0923-0-15-20-78-14-11-0

Short Stroke
Surface Mount


0927



0927-0-15-20-75-14-11-0

Standard Stroke
Surface Mount


0928



0928-0-15-20-77-14-11-0

Long Stroke
Surface Mount


0929



0929-0-15-20-75-14-11-0

Standard Stroke
Solder Mount in .027 min. mounting Hole


0936



0936-0-15-20-75-14-11-0

Standard Stroke
Surface Mount

0908-X

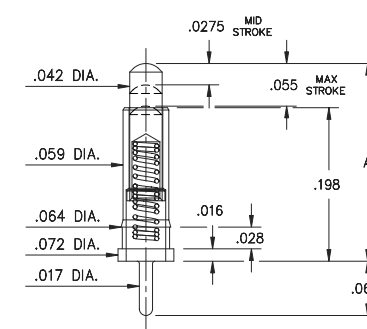

0908-X-15-20-75-14-11-0

Standard Stroke
Solder mount in .018 min. mounting hole

Basic Part Number	Length A
0908-0	.255
0908-1	.275
0908-2	.295
0908-3	.315
0908-4	.335
0908-5	.350
0908-6	.370
0908-7	.390
0908-8	.410
0908-9	.430

SPECIFICATIONS

SLEEVE & PLUNGER MATERIAL: Copper Alloy

SPRING MATERIAL: Beryllium Copper

CURRENT RATING: 2A continuous, 3A peak

CONTACT RESISTANCE: 20mΩ max.

DURABILITY: 1,000,000 cycles min.

DIMENSION IN INCHES

TOLERANCES ON: LENGTHS: ±.005

DIAMETERS: ±.002

ANGLES: ± 2°

ORDER CODE: XXXX - X - 15 - 20 - 7X - 14 - XX - 0

BASIC PART #

SLEEVE & PLUNGER FINISH:

20 20μ" GOLD OVER NICKEL

SPRING FINISH:

14 10μ" GOLD OVER NICKEL

SPRING

71 Standard Stroke (.055):

75 Standard Stroke (.055):

73/74 Standard Stroke (.055):

77 Long Stroke (.090):

78 Short Stroke (.039):

xx grams@min stroke

25 grams@min stroke

60 grams@min stroke

95 grams@min stroke

xx grams@min stroke

