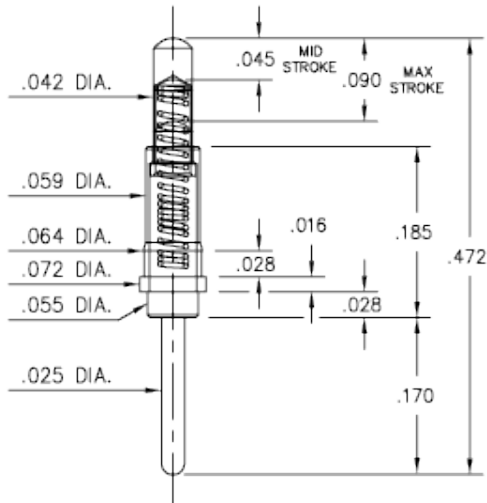


Product Number: 0932-0-15-20-77-14-11-0

0932-0-15-20-77-14-11-0

Long Stroke

Solder Mount in .027 min. mounting hole

Description:
0932 - Spring-Loaded Pin

Packaging:

Packaged in Bulk

Mill-Max Part Number	Shell Plating	Contact Plating	RoHS Compliant
0932-0-15-20-77-14-11-0	20 μ" Gold over Nickel	10 μ" Gold over Nickel	RoHS 2002/95/EC

SHELL MATERIAL:
BRASS ALLOY (UNS C36000) per ASTM B 16

Properties of BRASS ALLOY:

- Chemical composition: Cu 61.5%, Zn 35.4%, Pb 3.1%†
- Hardness as machined: 80-90 Rockwell B
- Density: .307 lbs/in³
- Electrical conductivity: 26% IACS*
- Melting point: 900°C/885°C (liquidus/solidus)

†(3 to 4% lead is used to permit "free machining" and is permitted by EC Directive 2002/95Annex 6; so all pin materials are RoHS compliant)

*International Annealed Copper Standard, i.e. as a % of pure copper.