

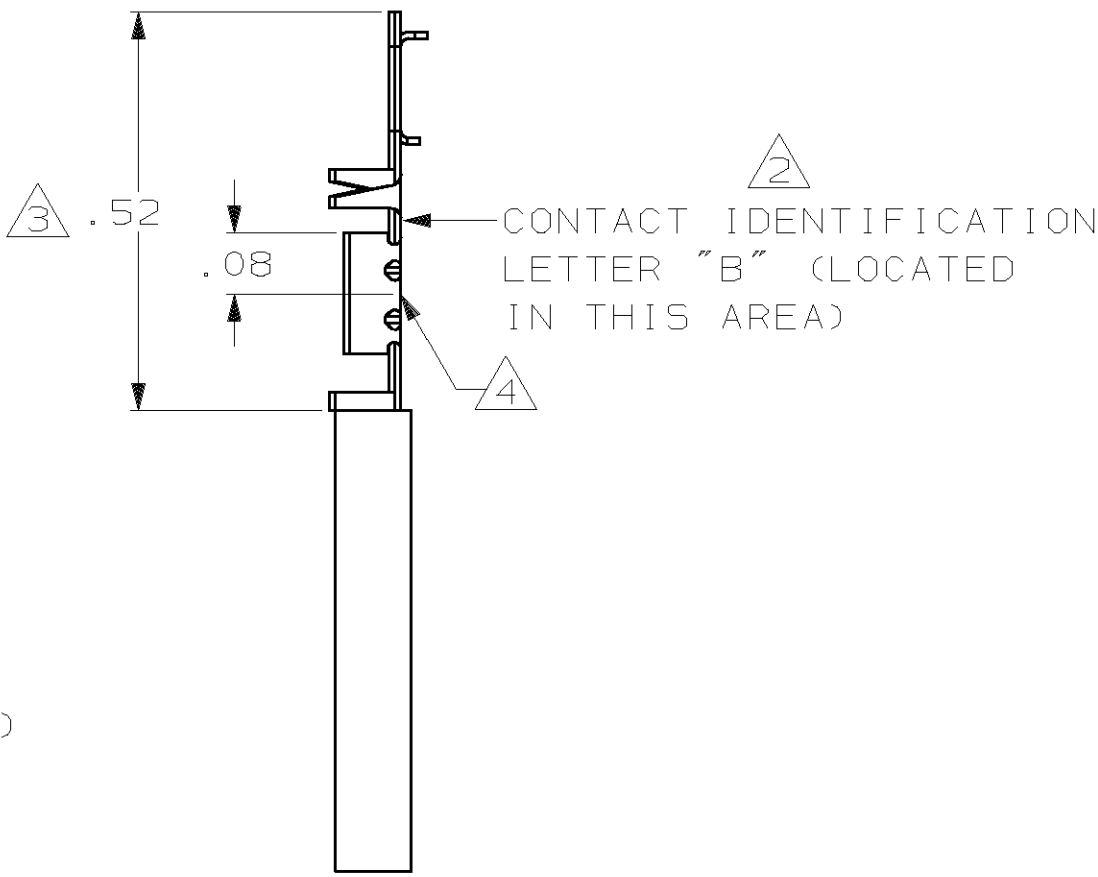


THIS DRA RELEASED FOR PUBLICATION , 19 .
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST	P	F	REVISIONS			
				ZONE	LTR	DESCRIPTION	DATE
AD	39				B	ECN 1166 REVISED & REDRAWN	-
					C	REV PER AR2268	BM 4-89
					D	REV LOC & DIST AD-4171	3-90
					E	REV PER 0010-0832-93	7-93
					F	REV PER 0010-0782-93	2-16-94
					G	REV PER 0010-1884-93	2-16-94
					H	REV PER 0010-0708-94	5-31-94
					J	REV PER 0010-0810-94	5-31-94
					K	REV PER 0010-0487-95	5-5-95
					L	REV PER 0010-0785-96	1-22-97
					M	REV PER 0310-0412-97	02-FEB-98
					N	REV PER 0G3C-0018-00	19JUL00

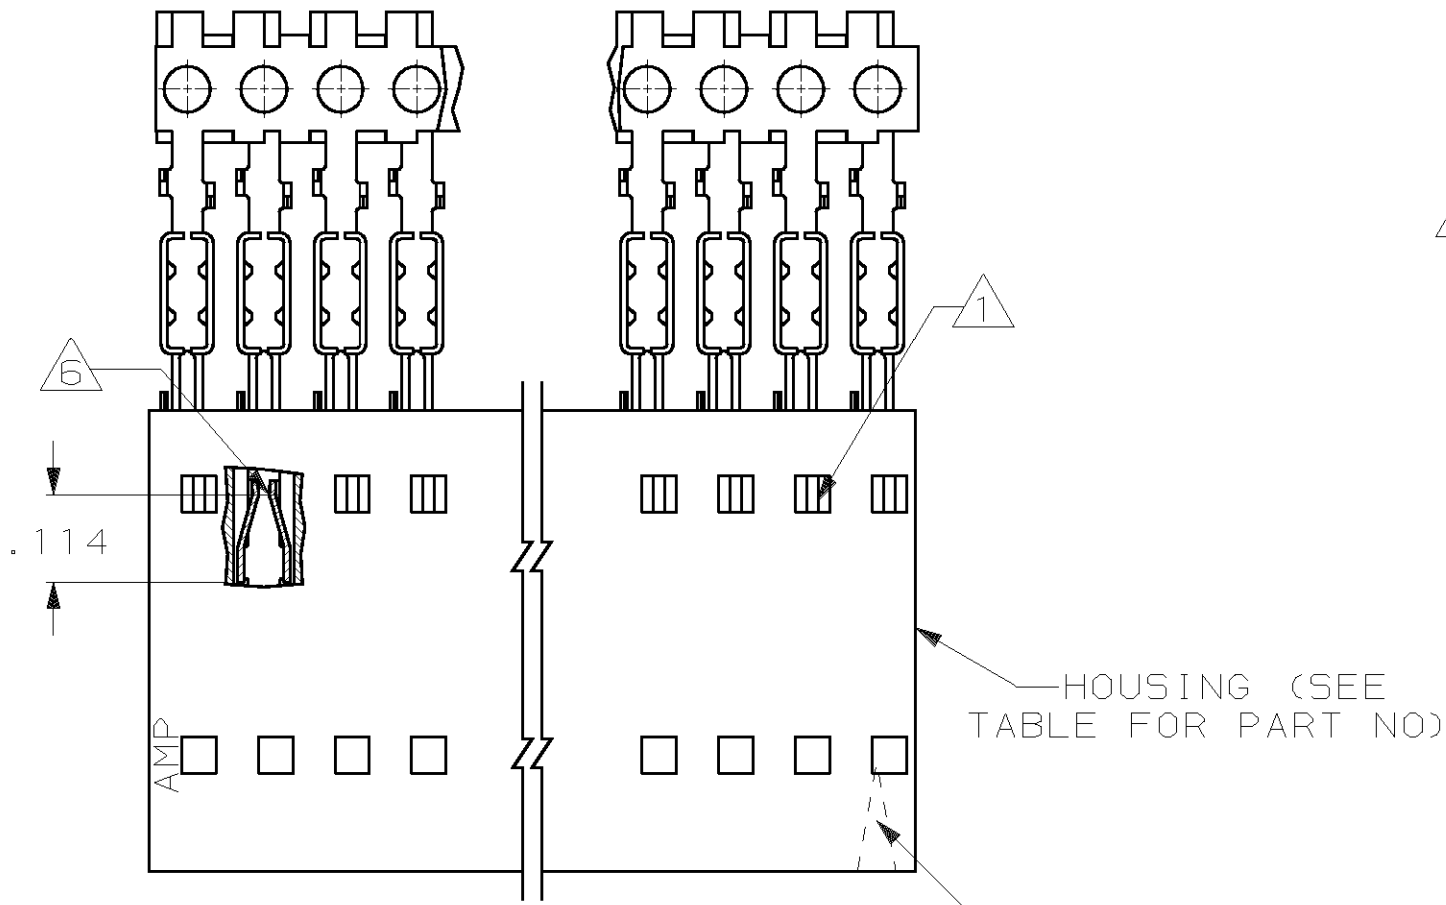

POSITION #1 INDICATOR (FARSIDE)

2-103688-4	25	2-103686-4
2-103688-3	24	2-103686-3
2-103688-2	23	2-103686-2
2-103688-1	22	2-103686-1
2-103688-0	21	2-103686-0
1-103688-9	20	1-103686-9
1-103688-8	19	1-103686-8
1-103688-7	18	1-103686-7
1-103688-6	17	1-103686-6
1-103688-5	16	1-103686-5
1-103688-4	15	1-103686-4
1-103688-3	14	1-103686-3
1-103688-2	13	1-103686-2
1-103688-1	12	1-103686-1
1-103688-0	11	1-103686-0
103688-9	10	103686-9
103688-8	9	103686-8
103688-7	8	103686-7
103688-6	7	103686-6
103688-5	6	103686-5
103688-4	5	103686-4
103688-3	4	103686-3
103688-2	3	103686-2
103688-1	2	103686-1

SUPERSEDED BY 1-103975-1	1-103688-1	12	1-103686-1
SUPERSEDED BY 1-103975-0	1-103688-0	11	1-103686-0
SUPERSEDED BY 103975-9	103688-9	10	103686-9
SUPERSEDED BY 103975-8	103688-8	9	103686-8
SUPERSEDED BY 103975-7	103688-7	8	103686-7
SUPERSEDED BY 103975-6	103688-6	7	103686-6
SUPERSEDED BY 103975-5	103688-5	6	103686-5
SUPERSEDED BY 103975-4	103688-4	5	103686-4
SUPERSEDED BY 103975-3	103688-3	4	103686-3
SUPERSEDED BY 103975-2	103688-2	3	103686-2
SUPERSEDED BY 103975-1	103688-1	2	103686-1

HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
---------------------	------------	----------------------

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103975
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON : 2 PL DEC ± .02 3 PL DEC ± .005 ANGLES ± - MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS- PHOS BRONZE FINISH: CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL	DR 05 NOV 1986 L. MAYER	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 11/12/86 P. DEJONG		
	APPD 11/12/86 P. DEJONG	NAME RCPT ASSY, AMPMODU® MTE, SINGLE ROW, .100¢, FOR #22-#26 AWG WIRE SIZE	
	APPD 11/13/86 J. SCHIEFER		
PRODUCT SPEC 108-25034 APPLICATION SPEC 114-25026 WEIGHT -	SIZE C		FSCM NO 00779
	SCALE 4:1		DRAWING NO 103686
			SHEET 1 OF 1