


LOC	DIST	P	F	REVISIONS			
				ZONE	LTR	DESCRIPTION	DATE
AR	39				F	REV PER EC 0020-354-93	04/01/93
					G	OBS -4,-19,-47 PER EC 0020-0943-93	11/22/93
					H	OBS -42 PER EC 0020-0501-94	05/12/94
					J	OBS -33 PER EC 0020-663-94	12/19/94
					K	OBS -37 PER EC 0020-918-95	02 FEB 96
							APPD
							GDM
							DK
							GM
							DM
							DLK

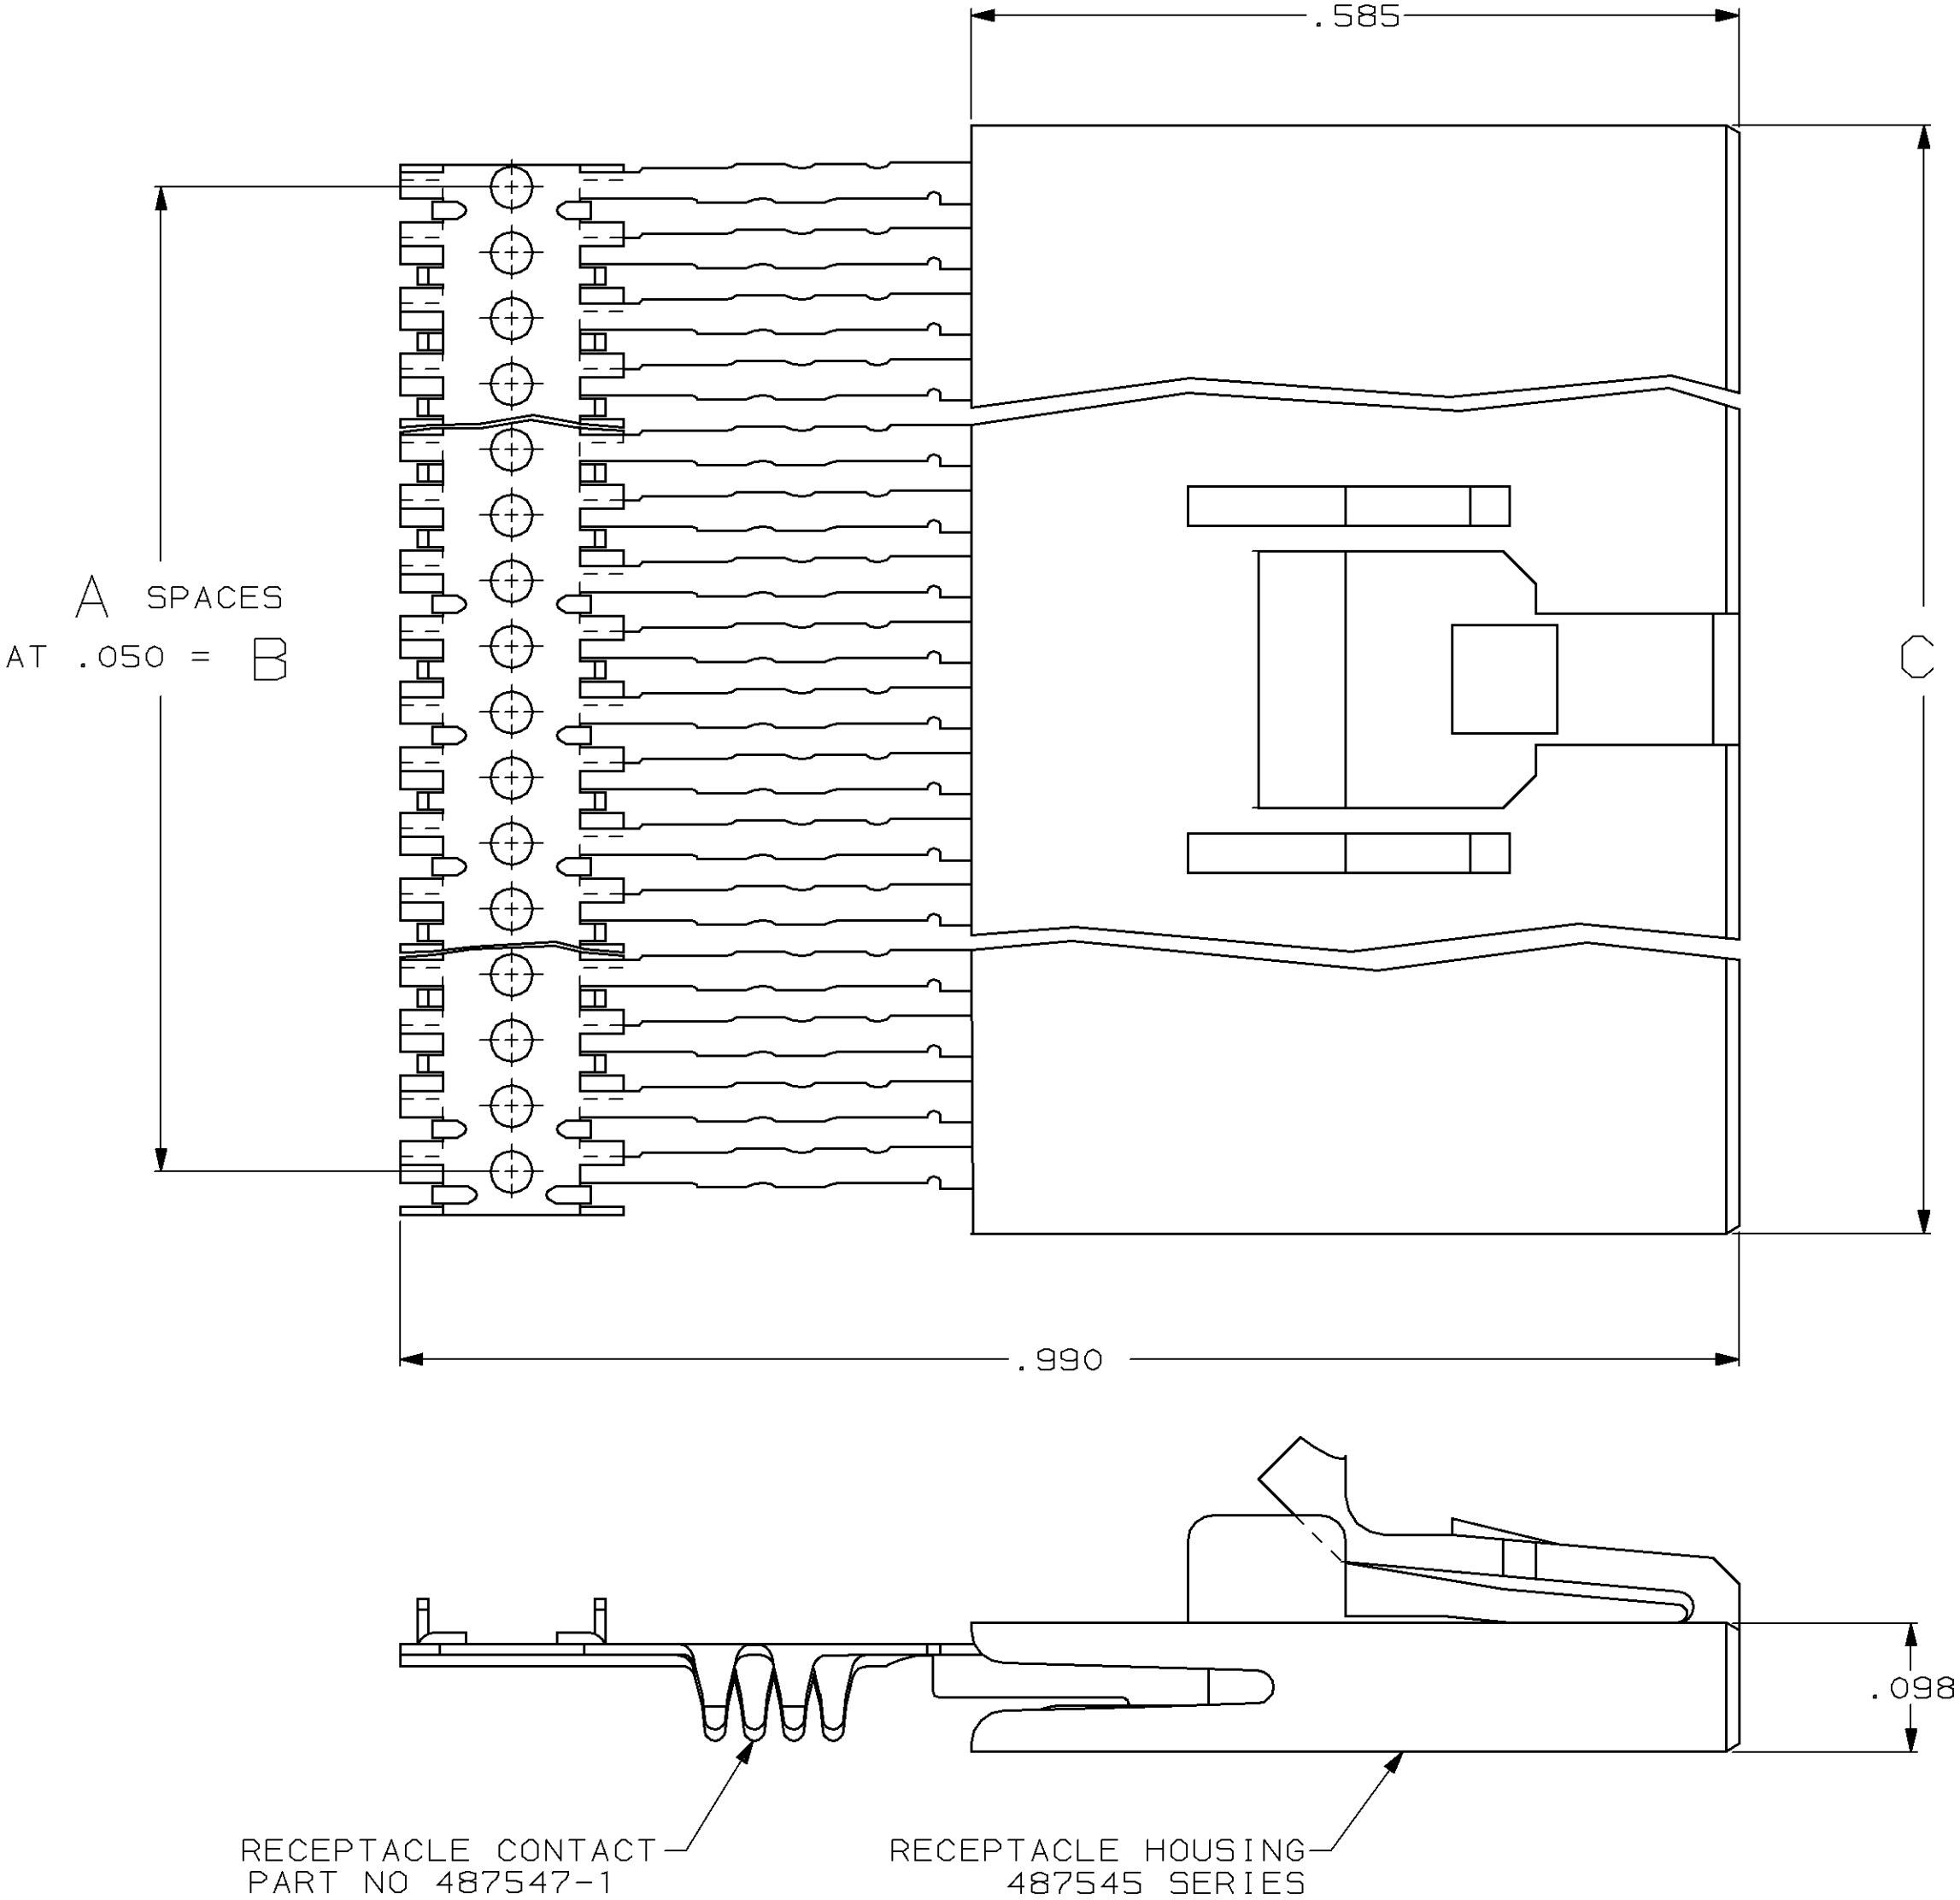

OBSOLETE	2.544	2.450	49	50	4-487550-7
OBSOLETE	2.294	2.200	44	45	4-487550-2
OBSOLETE	2.044	1.950	39	40	3-487550-7
OBSOLETE	1.844	1.750	35	36	3-487550-3
	1.544	1.450	29	30	2-487550-7
	1.294	1.200	24	25	2-487550-2
OBSOLETE	1.144	1.050	21	22	1-487550-9
	1.044	.950	19	20	1-487550-7
	.894	.800	16	17	1-487550-4
	.794	.700	14	15	1-487550-2
	.694	.600	12	13	1-487550-0
	.644	.550	11	12	487550-9
	.544	.450	9	10	487550-7
	.444	.350	7	8	487550-5
OBSOLETE	.394	.300	6	7	487550-4
	.344	.250	5	6	487550-3
	.294	.200	4	5	487550-2
	.244	.150	3	4	487550-1

- 1 BLACK FLAME RETARDANT THERMOPLASTIC.
- 2 NICKEL .000050 MIN THK UNDERPLATE ON ENTIRE CONTACT WITH GOLD .000030 MIN THK ON MATING AREA AND BRIGHT TIN/LEAD .000100 MIN THK ON CRIMP AREA.
3. TO BE TERMINATED TO FLEXIBLE FLAT CONDUCTOR CABLE IN APPLICATOR 818973-1.
4. MIN MATING POST LENGTH .125.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES. TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± -	DR 10-18-85 D.DOLLYHIGH		AMP AMP Incorporated Harrisburg, PA 17105-3608			
	CHK 10-18-85 D.R.WORTHINGTON					
	MATERIAL HOUSING: 1 CONTACTS: PHOS BRONZE	APPD 10-21-85 JERRY L. TONEY		NAME PRE-LOADED HOUSING, RCPT, .050¢, FFC		
APPD 10-28-85 R.MCHUGH						
PRODUCT SPEC 108-16022						
FINISH CONTACTS: 2	APPLICATION SPEC 114-16008		SIZE C	CAGE CODE 00779	DRAWING NO C=487550	
	WEIGHT -		SCALE 8:1			SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.