









Copyright FCI.

PRODUCT NUMBER  
SEE TABLE, SHEET 2

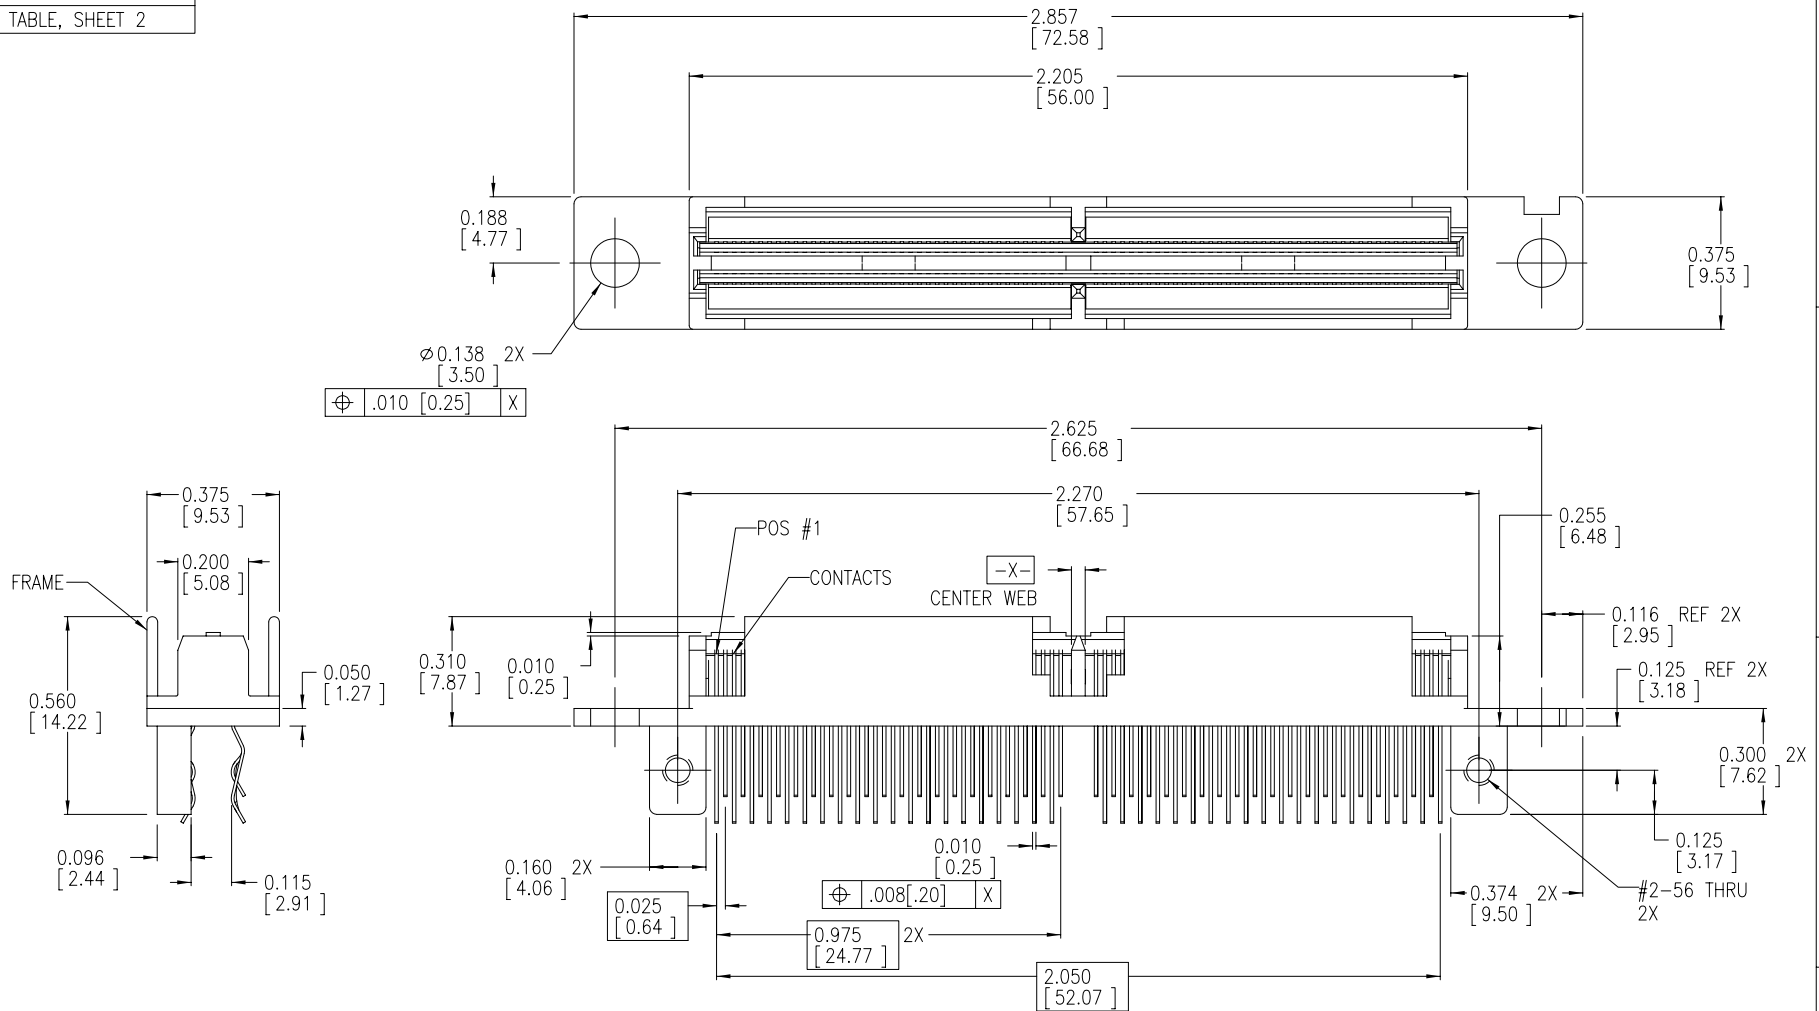

rev	ecn no	dr	date
A	V03-0847	GIP	08/04/03
B	M06-0195	MHT	5/26/06
TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR	0.X	±.3	-
	0.XX	±.10	-
	0.XXX	±.050	-
ANGULAR	0'	±2'	-


			www.fciconnect.com		surface 		tolerance		projection 		INCH/MM 	
Dr	T.BRUNGARD	05/15/03	Product family				MICROPAX		size	A4	Scale	1:1
Eng	M. GRAY	05/15/03	Spec ref									
Chr	M. GRAY	05/15/03	Material				SEE NOTES		ECN		NCR	
Appr	M. GRAY	05/15/03										
		MICROPAX 160 POSITION						dwg no		10024097		Rev.
title		STRAIGHT PLUG ASSY.										B
catalog no								-		CUSTOMER		sheet 1 of 2

REV F - 2006-04-17



PRODUCT NUMBER	NO. OF CONTACTS	OPTIONAL SOLDER BUMP
10024097-001	160	YES
10024097-002	160	NO

NOTE 3

NOTE 3

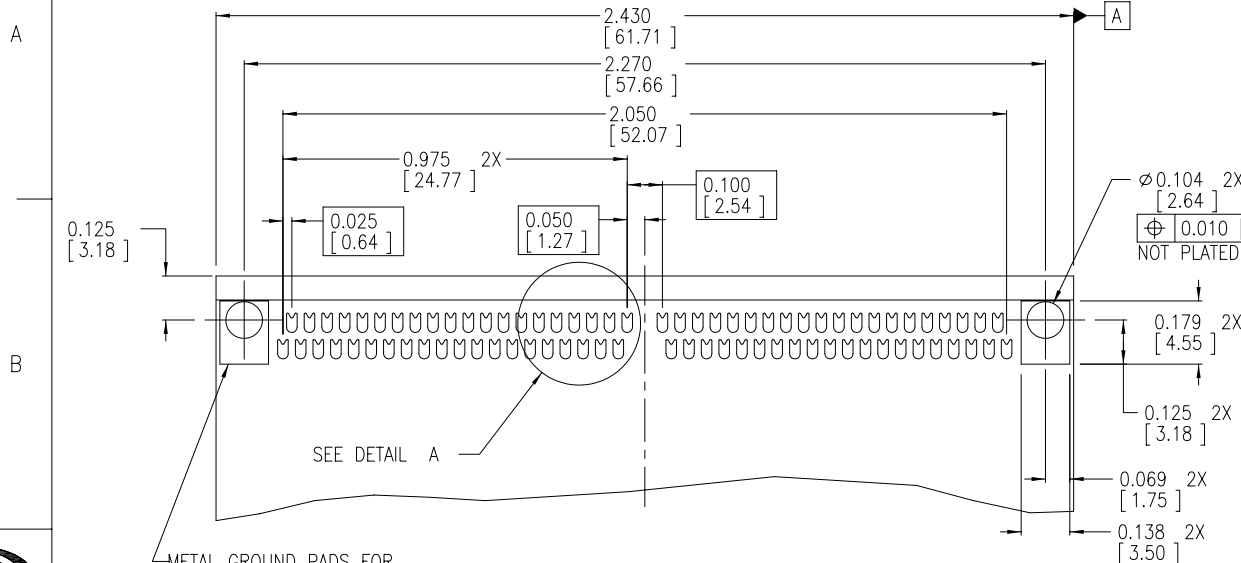

### RECOMMENDED TERMINATION REQUIREMENTS

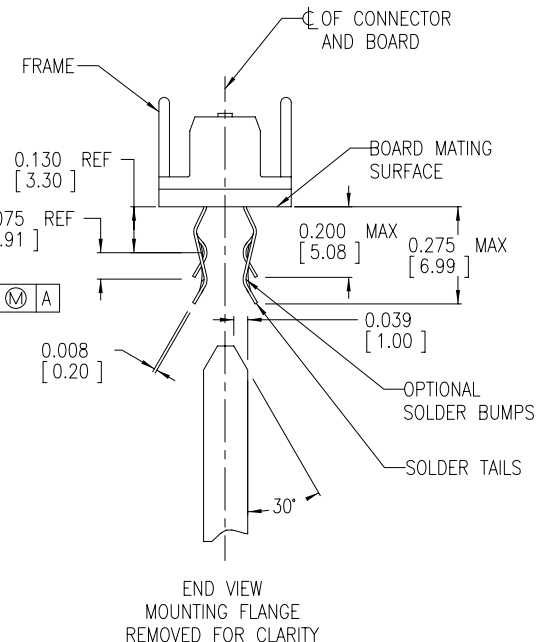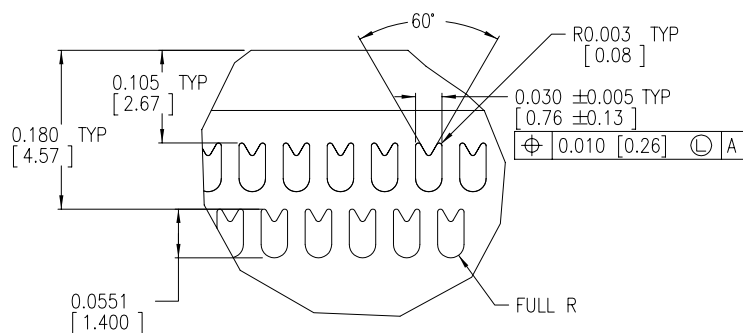

### NOTES:

1. MATERIALS:  
DIELECTRIC: LCP  
CONTACTS: PHOS. BRONZE  
FRAME: ZINC ALLOY, #3
2. PLATING:  
SOLDER TAILS: 150u"/3.18um SnPb  
CONTACT: GXT 60u"/1.52um OVER 75u"/1.90um Ni.  
  
LEAD FREE PLATING:  
SOLDER TAILS: 150u"/3.18um Sn  
CONTACT: GXT 60u"/1.52um OVER 75u"/1.90um Ni.
3. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
4. IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.



MICROPAX 160 POSITION  
STRAIGHT PLUG ASSY.

dwg no	10024097	Rev.	B
CUSTOMER	sheet 2 of 2		

REV F - 2008-04-17