

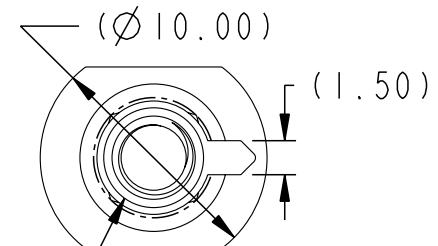
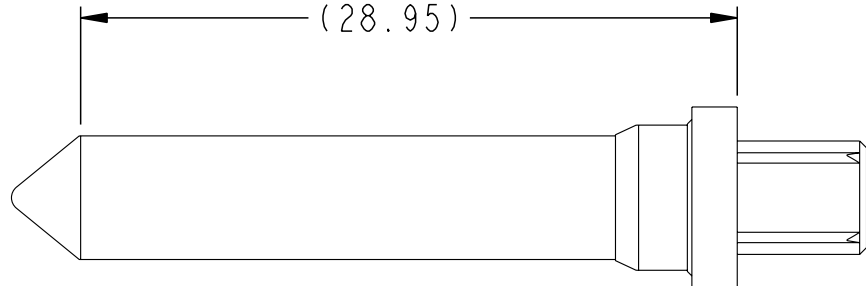


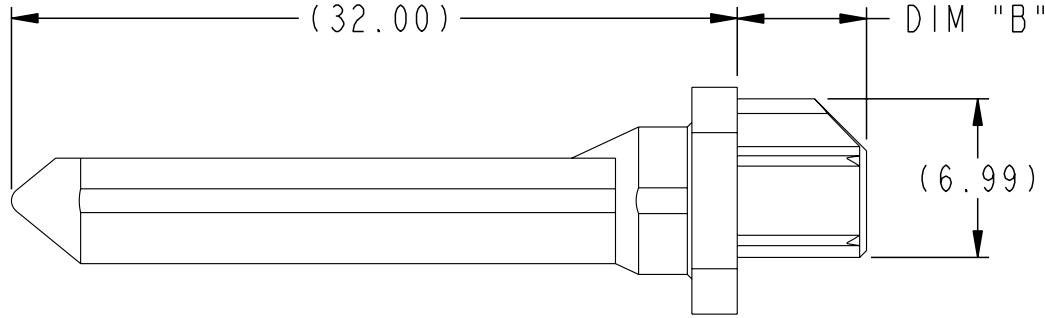

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de FCI. Droits de reproduction FCI.

PRODUCT NUMBER
SEE TABLE, SHT 3

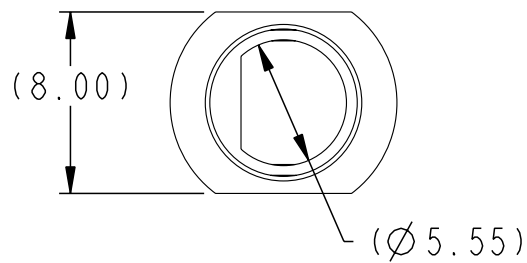

M3.5 X 0.6-6H
SEE TABLE DIM "D"
FOR THREAD DEPTH

TOLERANCES UNLESS OTHERWISE SPECIFIED		rev	ecn no	dr	date
		A	V05-0103	AR	01/27/05
LINEAR	0.X	±.3	D	V05-0262	AR 03/29/05
	0.XX	±.10	E	S05-0237	CH 08/23/05
	0.XXX	±.050	-	-	-
ANGULAR	0°	±2°	-	-	-

 www.fciconnect.com			surface 3.2 ✓ ASME Y14.5		tolerance ASME Y14.5 -		projection 		MM 	
Dr	A. RAISTRICK	08/03/04	Product famiMax Accessories			size A4		Scale 3:1		
Eng	B. MARSHALL	08/03/04	Spec ref -							
Chr	C H. TAN	08/23/05	Material SEE NOTES			ECN		***		
Appr	NG JOEY	09/15/05								
title 10.8mm GUIDE PIN, INTERNAL THREAD						dwg no 10037911			Rev. E	
catalog no -						CUSTOMER			sheet 1 of 3	


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PRODUCT NUMBER	DIM "B"	DIM "C" 4/5 PAIR	DIM "C" 2/3 PAIR	DIM "D"
10037911-101LF	5.70	6.00	4.50	6.60
10037911-102LF	2.75	6.00	4.50	4.10
10037911-103LF	3.20	6.00	4.50	4.10

10.8 MM RECEPTACLE GUIDE MODULE NOTE 4	DIM "A"
10037912-1X1LF	0°
10037912-1X2LF	45°
10037912-1X3LF	90°
10037912-1X4LF	135°
10037912-1X5LF	180°
10037912-1X6LF	225°
10037912-1X7LF	270°
10037912-1X8LF	315°

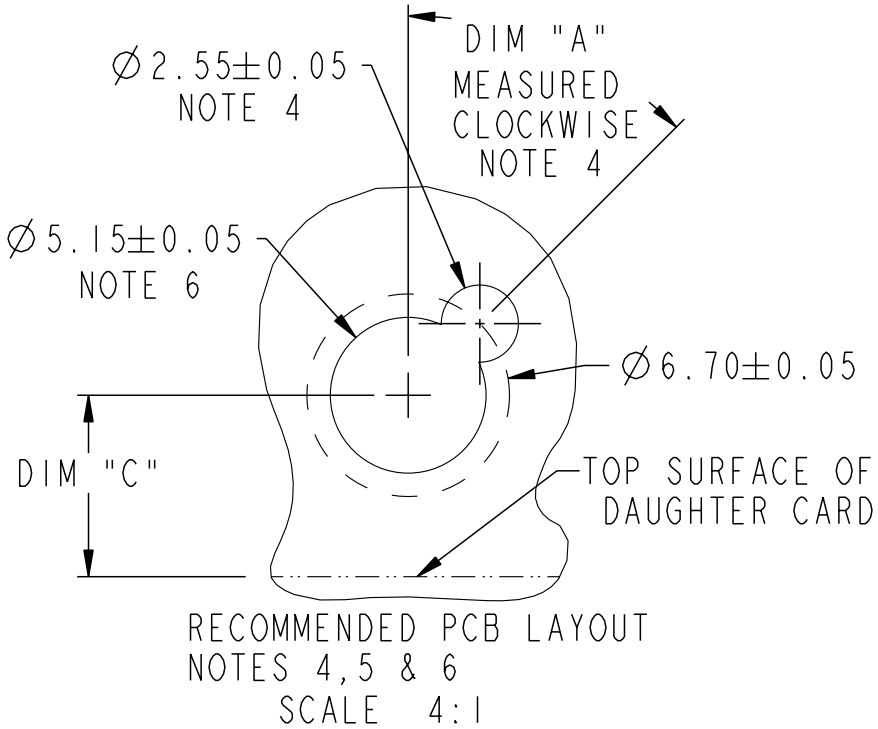

title	10.8mm GUIDE PIN, INTERNAL THREAD	dwg no	10037911	Rev.	E
catalog no	-	CUSTOMER	sheet 2 of 3		



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriete de c FCI. Droits de reproduction FCI.

- 1. MATERIAL: ZINC ALLOY
- 2. FINISH: ZINC YELLOW CHROMATE
- 3. APPLICATION SPECIFICATION: GS-20-045
- ④. KEY HOLE ORIENTATION (DIM "A") WILL BE DEFINED BY THE MATING RECEPTACLE GUIDE MODULE PART NUMBER - SEE TABLE (ORIENTATION SHOWN IS FOR 10037912-1X2LF)
- ⑤. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES
- ⑥. THRU HOLE PLATING AND ANNULAR RINGS MUST BE ADDED IN APPLICATIONS THAT USE THE ESD GROUNDING OPTION FINISHED HOLE SIZE IS THE SAME REGARDLESS OF PLATED BARREL OR NOT.
- 7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 8. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.

title	10.8mm GUIDE PIN, INTERNAL THREAD		dwg no	10037911		Rev.	E
	catalog no	-		CUSTOMER	sheet 3 of 3		