


P.C. MOUNTING

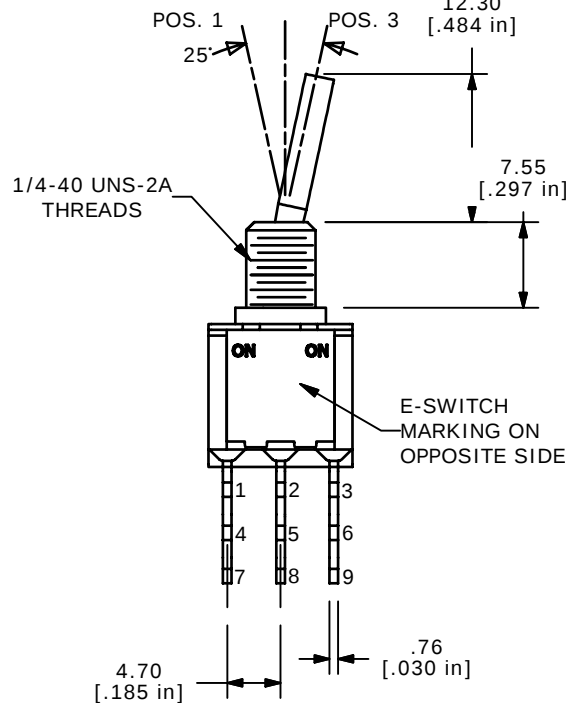
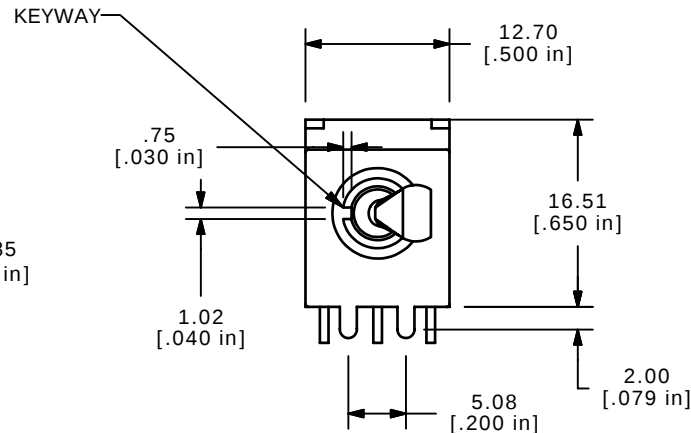

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6, 8-9	N/A	2-1, 5-4, 8-7



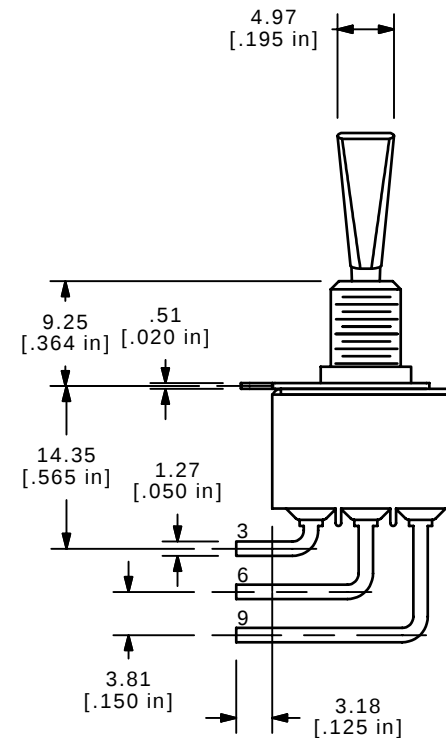
CIRCUIT: 3PDT

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
- RATING: 0.4 (VA) MAX. @20V MAX.
- ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

E-SWITCH
MARKING ON
OPPOSITE SIDE

ISOMETRIC



C	15275	ORIENTATION OF BUSHING AND NOTE 11	9/14/05	PH
B	15164	CHANGED ORIENTATION ON BUSHING	8/10/05	PV
A	14908	RELEASED FOR PRODUCTION	5/10/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 1003P1T6B11M6RE

SCALE
2:1DATE
5/10/2005DR
JBDWG
T111608REV
C