
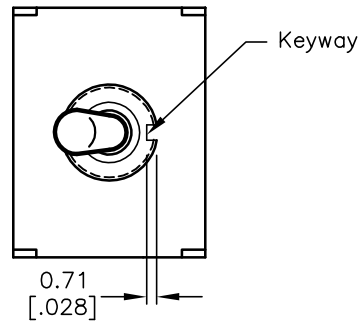
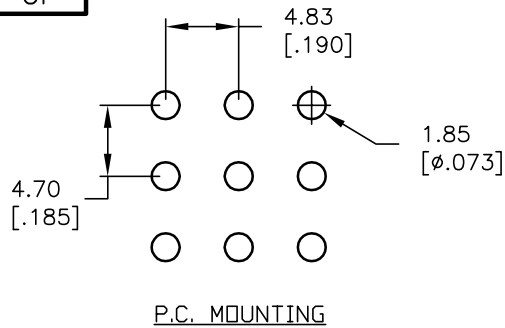

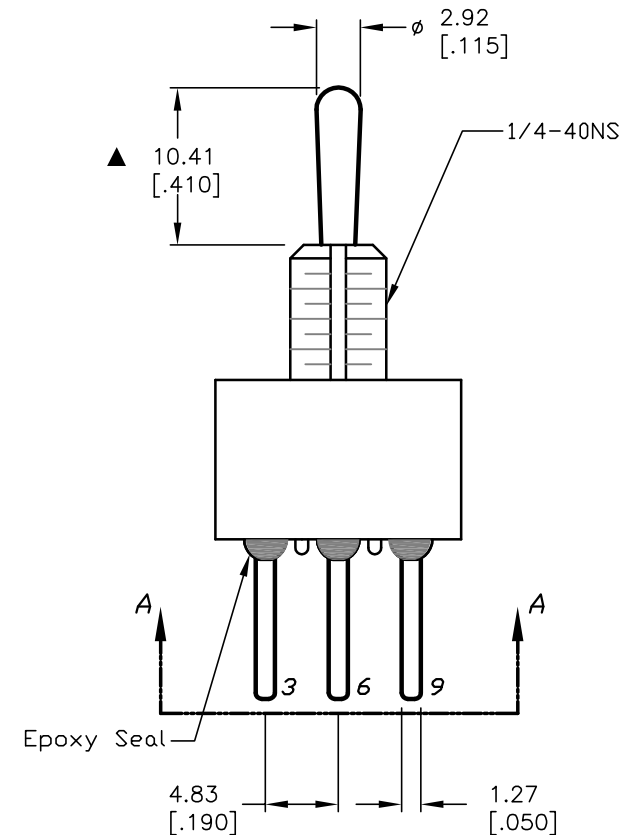


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3,5-6 8-9	OPEN	2-1,5-4 8-7

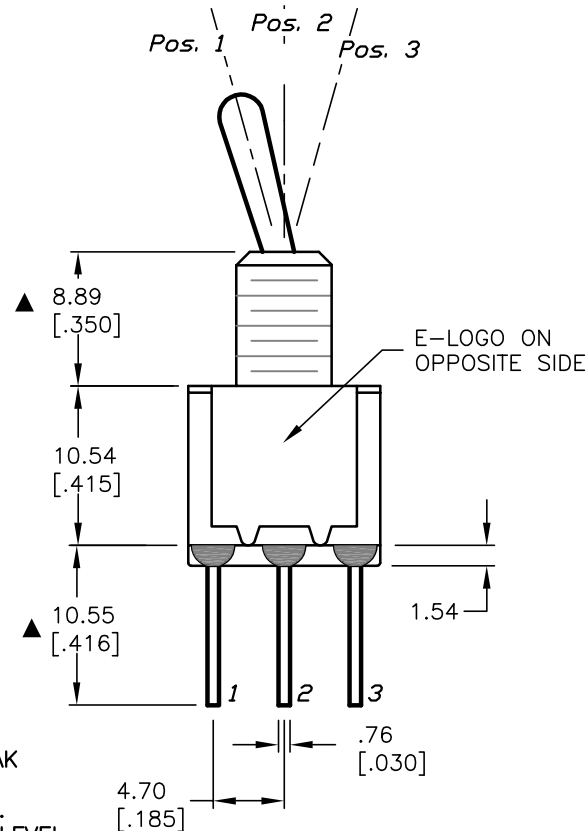

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC OR 28VDC;
2A @250VAC
- FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE.
- ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK
CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000M OHM MIN.
- DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

TITLE

1003P3T1B1M53QE

SCALE

2:1

DATE

11/2/04

DR

AR

DWG

T133053

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	14448	RELEASED FOR PRODUCTION	11/2/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD