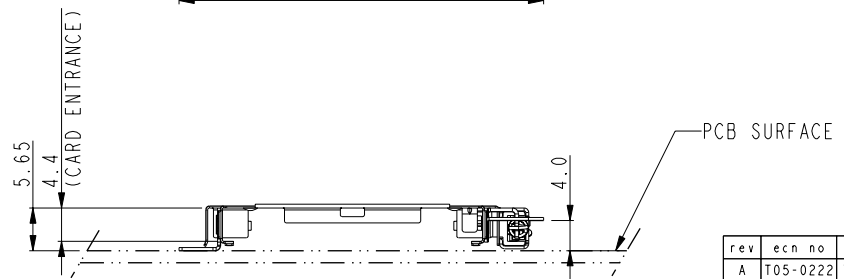
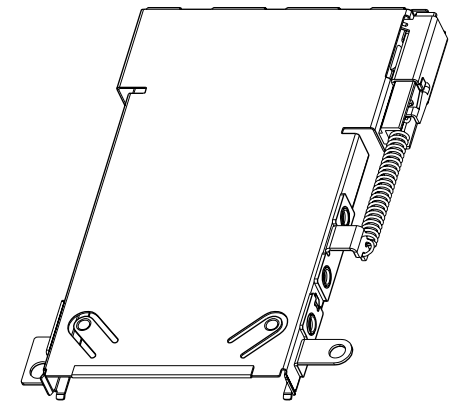
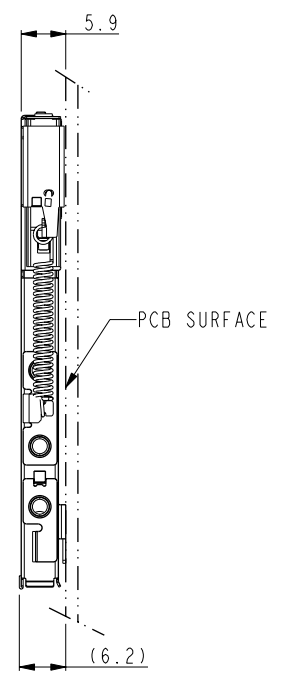
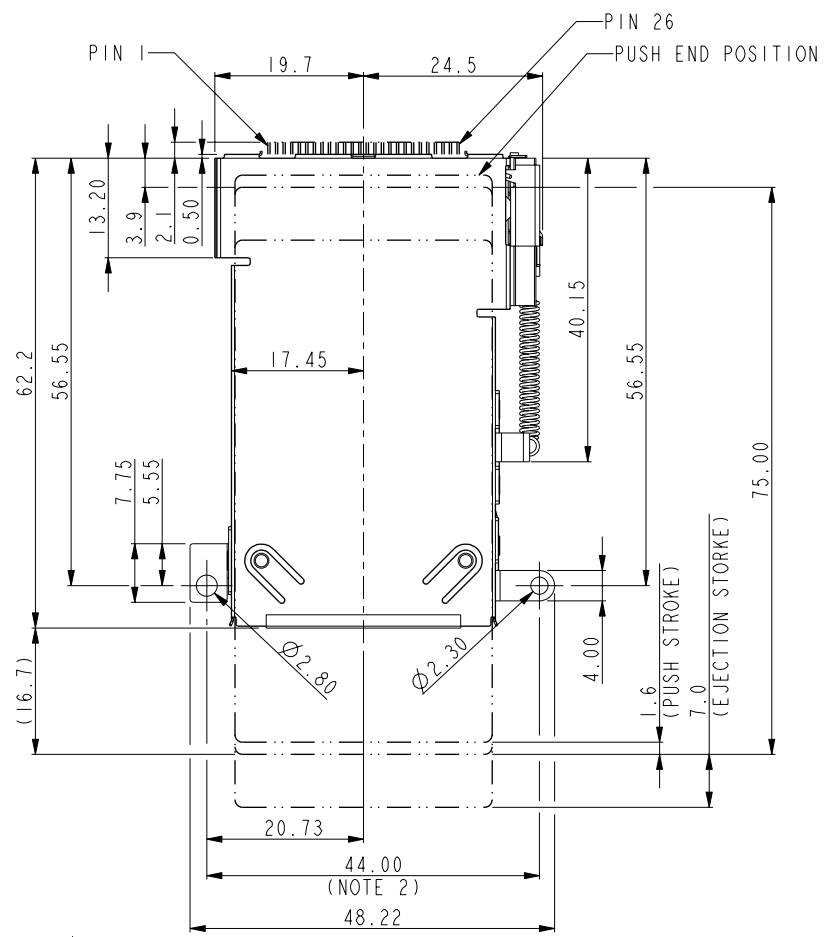







Copyright FCI.

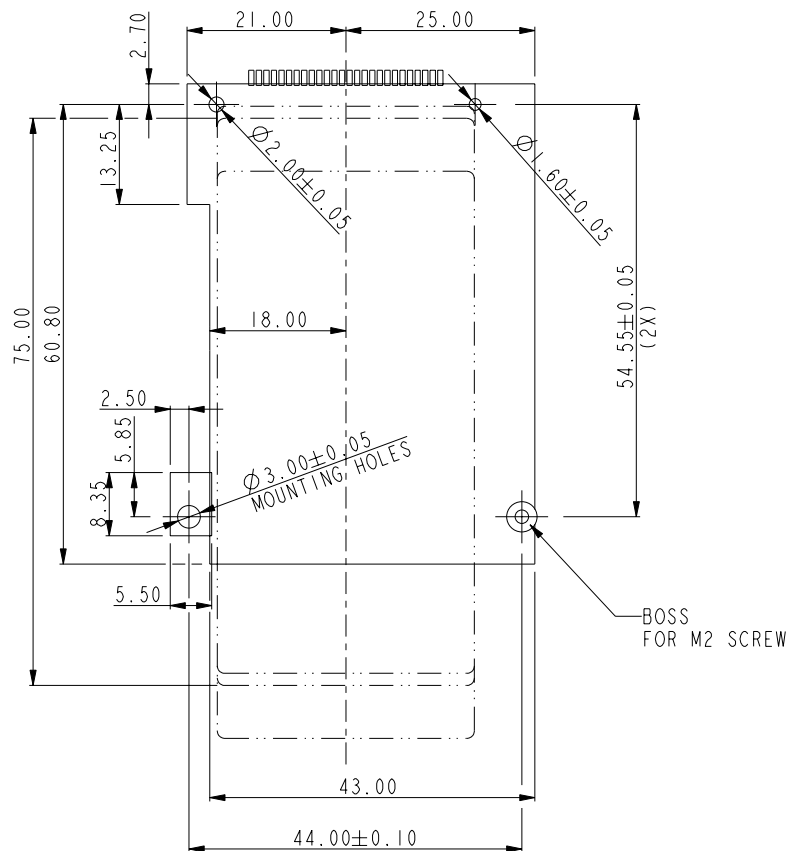
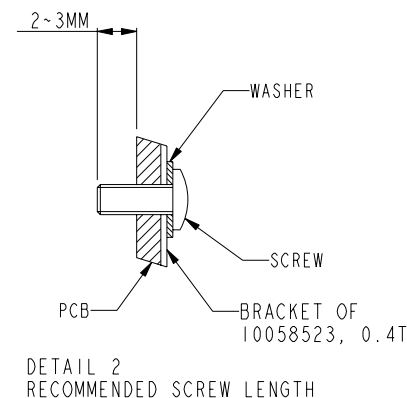


rev	ecn no	dr	date
A	T05-0222	TAI	09/26/05
B	T05-0244	TAI	10/28/05
C	N09-0013	R.B	2009/01/20
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface <input checked="" type="checkbox"/>		tolerance std ASME Y14.5		projection 		MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	KENNY TAI	07/22/05	ANGULAR	LINEAR	0.X		±0.30		size A4	Scale 1.000
Eng	KENNY TAI	07/22/05			0.XX		±0.15			
Chr	KENNY TAI	07/22/05			0°	±2°	0.XXX			
Appr	PAUL WANG	07/22/05	Product family						ECN N09-0013	
			Spec ref						*	
			title TOP MOUNT, CARD PUSH EXPRESSCARD HOST MECH.			dwg no 10058523			Rev. C	
			catalog no			10058523			CUSTOMER	
									sheet 1 of 2	

REV F - 2006-04-17

PART NO.	MOUNTING	STAND-OFF	HOST CONN P/N	PRODUCT SPEC.	PACKING SPEC.	CONN. UNMATING FORCE
10058523-00ALF	ABOVE	0MM	10058937-X00AXXL	GS-12-301	GS-14-295	18.5N MAX.



- NOTE:
1. 2 M2*0.4P SCREWS WITH WASHER ARE REQUIRED.
 2. SHOW DIMENSION AFTER FASTENED TO PCB.
 3. SEE HOST CONNECTOR DRAWINGS FOR PCB LAYOUT DETAIL.
 4. RECOMMENDED TIGHTING TORQUE 1.6~1.8 KGF-CM.
 5. SEE DETAIL 2 FOR RECOMMENDED SCREW LENGTH.

www.fciconnect.com			surface		tolerance std ASME Y14.5				MM		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	KENNY TAI	07/22/05	ANGULAR	LINEAR	0.X ±0.30		size A4	Scale 1.000			
Eng	KENNY TAI	07/22/05			0.XX ±0.15						
Chr	KENNY TAI	07/22/05			0°.XXX ±			ECN N09-0013			
Appr	PAUL WANG	07/22/05	Product family					Spec ref *			
			title TOP MOUNT, CARD PUSH EXPRESSCARD HOST MECH.			dwg no 10058523			Rev. C		
catalog no			10058523			CUSTOMER		sheet 2 of 2			