






▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1



CIRCUIT: DPDT

- NOTE:
- 1. ALL DIMENSIONS IN MM [INCH]
 - 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 - 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲ 4. PLATING MATERIAL: SILVER
 - 5. RATING: 5AMPS W/RESISTIVE LOAD @ 120VAC OR 28VDC
2 AMPS W/ RESISTIVE LOAD @ 250VAC
 - 6. ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
 - 7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
 - 8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 - 9. OPERATING TEMP.: -30°C to 85°C
 - 10. ▲ DENOTES CRITICAL PARAMETER.
 - 11. 2002/95/EC (ROHS) COMPLIANT

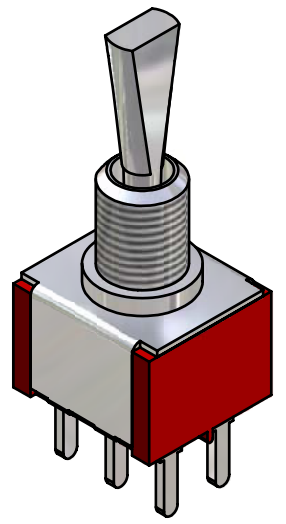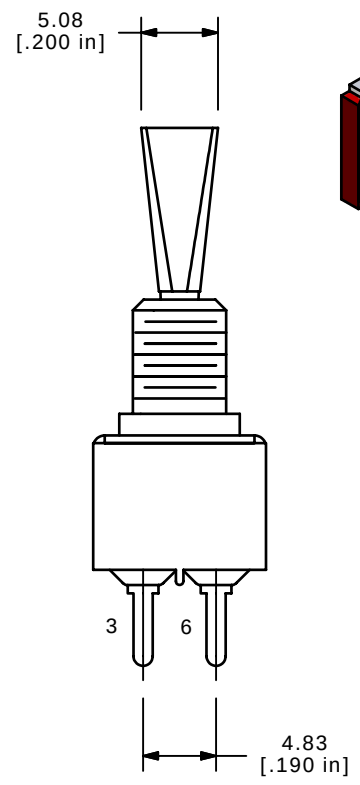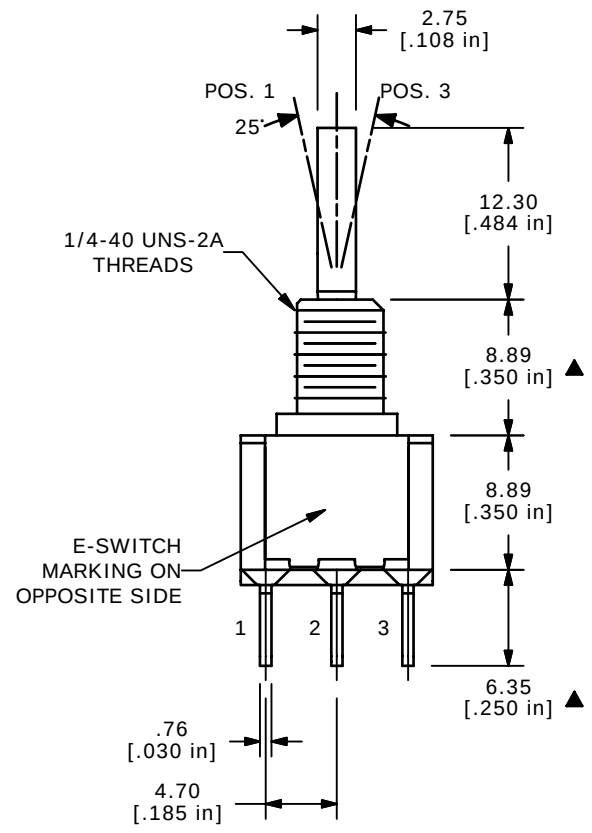

ISOMETRIC

E-SWITCH®

D	16174	REVISED AND REDRAWN	6/22/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP1T6B15M2QE				
SCALE 2:1	DATE 6/11/1998	DR MM	DWG T121056	REV D