




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
DN	NONE	DN
2-3	OPEN	2-1

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
- ▲4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. ELECTRICAL LIFE: 50,000 make—and—break
cycles at full load.
6. INSULATION RESISTANCE: 1,000M ohm min.
7. DIELECTRIC STRENGTH: 1000V RMS @sed level
8. OPERATING TEMP.: -30°C to 85°C
9. ▲DENOTES CRITICAL PARAMETER
10. 2002/95/EC (ROHS) COMPLIANT

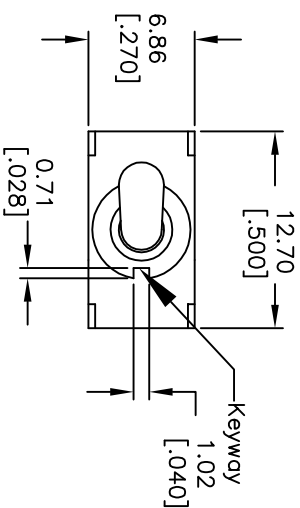

E	17781	CHANGED TERM. DIM TO 5.1	10/15/07	BF
D	17712	CHANGED TERM LENGTH TO 6.60	9/24/07	BF
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

TITLE					100SP11B4M2QE				
SCALE		DATE		DR		DWG		REV	
2:1		9/24/07		BF		T111597		E	