




RECOMMENDED PCB LAYOUT



SPDT CIRCUIT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	OPEN	2-1

CONTACT CONFIGURATION

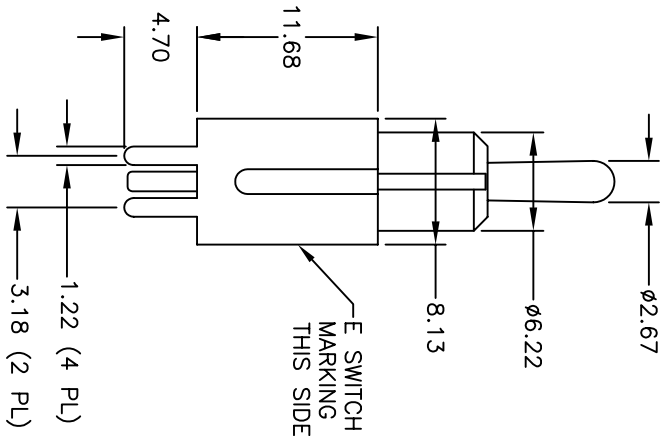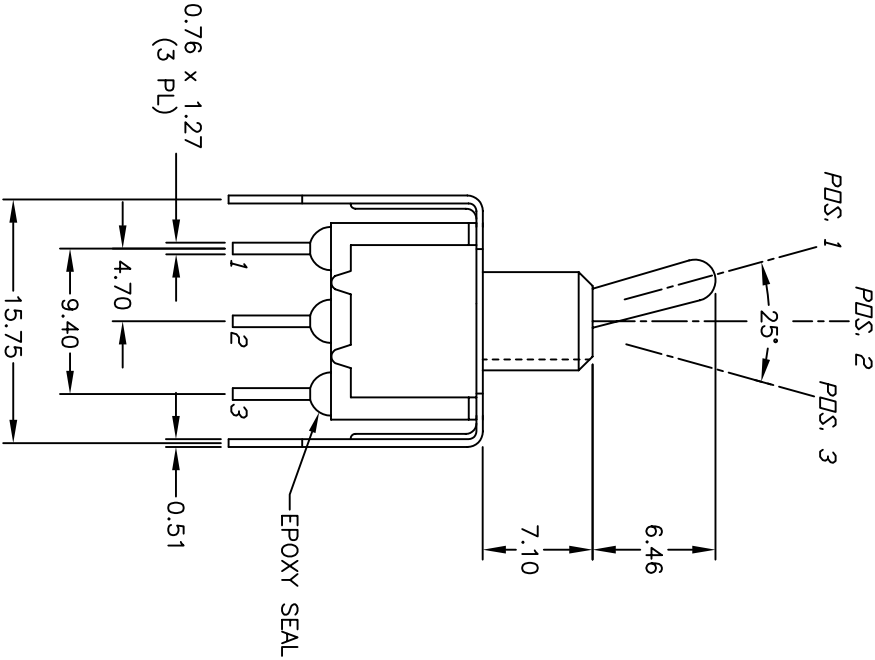

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0±0.4
3. TERMINAL NUMBERS FOR REF ONLY 0.00±0.25
4. RATING: 5 AMPS @ 120VAC OR 28VDC; 2 AMPS @ 250VAC
5. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

TITLE				100 SP1 T2 B4 VS2 Q E		
B	15970	6.46 DIM. WAS 6.86	4/18/06	CT		
A	10689	RELEASED FOR PRODUCTION	6/16/00	GLG		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	B
					DATE	
					6/16/00	
					DR	
					GLG	
					DWG	
					T111093	