



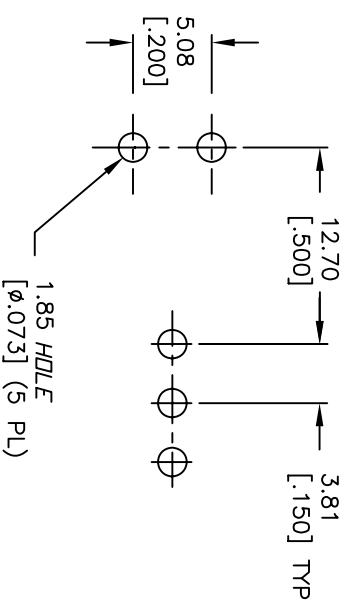

RECOMMENDED PCB LAYOUT



SPDT CIRCUIT CONTACT CONFIGURATION			
SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
			
<DN>	DIFF	<DN>	
2-3	OPEN	2-1	



$\langle \rangle = \text{Momentary}$

NOTES:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4VA @20V AC or DC max.
5. FIXED TERM. & MOVING CONTACT:
COPPER Alloy w/GOLD plate over
Nickel plate.
6. ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to $+85^{\circ}\text{C}$

B	15100	UPDATED DIMENSIONS	7/26/05	RC
A	12547	RELEASED FOR PRODUCTION	11/8/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

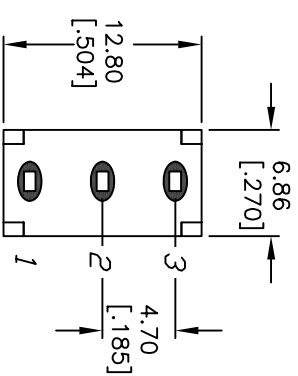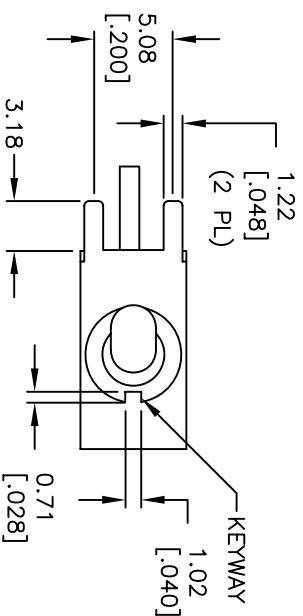

SECTION A-A

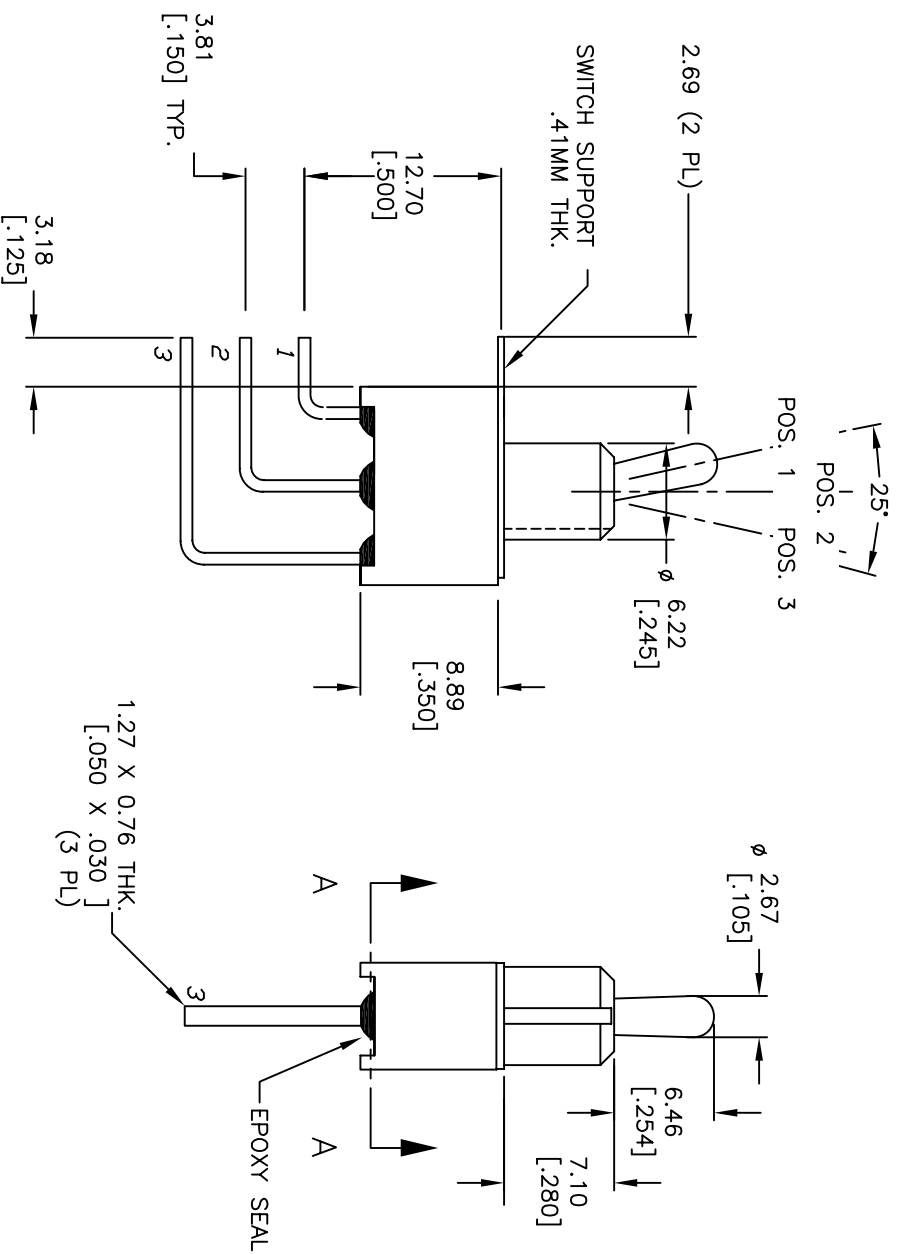

E-SWITCH®				
TITLE				
100 SP4 T2 B4 M7 RE				
SCALE	DATE	DR	DWG	REV
2:1	6/1/01	CB	T114039	B