



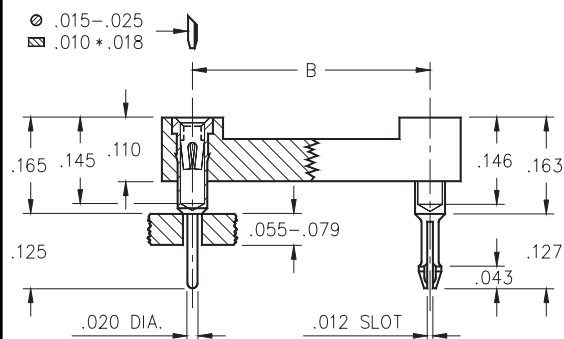

- Special lock-down feature prevents floating of socket during soldering. Open insulator with ladder construction.
- Sockets are XY stackable.
- Socket pins feature closed end construction eliminating any solder wicking problems.
- Series 101 use MM #1001 & MM #0156 pins. See page 134 for details.
- Insulators are high temperature thermoplastic.

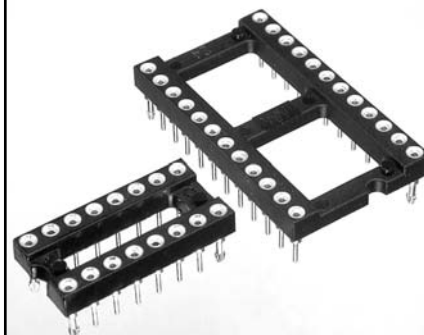

Total number of pins				Quantity per tube
	A	B	C	
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
22	1.1	0.4	0.5	18
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10
48	2.4	0.6	0.7	8
64	3.2	0.9	1.0	6

Ordering Information

101-XX-306-41-56X000
 101-XX-308-41-56X000
 101-XX-314-41-56X000
 101-XX-316-41-56X000
 101-XX-318-41-56X000
 101-XX-320-41-56X000
 101-XX-324-41-56X000
 101-XX-328-41-56X000

 101-XX-422-41-56X000

 101-XX-624-41-56X000
 101-XX-628-41-56X000
 101-XX-632-41-56X000
 101-XX-640-41-56X000
 101-XX-648-41-56X000

 101-XX-964-41-56X000



Clinch Pins: ↑
 Two Opposite Corner Pins **X = 0**
 Four Corner Pins **X = 8**

XX= Plating Code
See Below

For RoHS compliance select plating code.

SPECIFY PLATING CODE XX=			93				
Sleeve (Pin)			200μ" Sn/Pb				
Contact (Clip)			30μ" Au				