

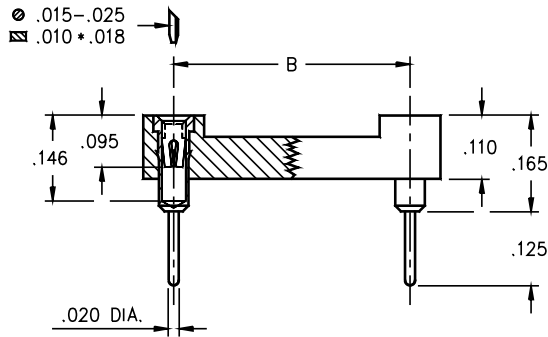


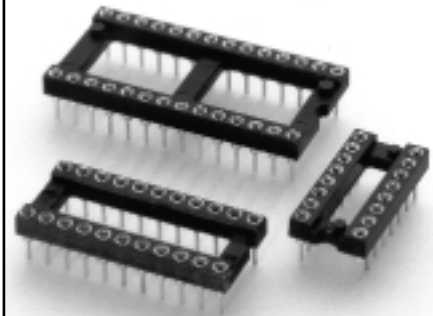

- All DIP sockets accept .015 - .025" dia. and standard IC leads.
- Lubricated contacts also available. (See page 96 for specs.)
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #1001 pin. See page 134 for details.



Total number of pins				Quantity per tube	Ordering Information				
	A	B	C						
10	0.5	0.2	0.3	40	XX= Plating Code See Below Replace '001' suffix with '361' for Lubricated contacts (To be used with "99" plating code only) For High Temperature Insulators Add '100' To End Of Part Numbers				
4	0.2	0.3	0.4	102					
6	0.3	0.3	0.4	67					
8	0.4	0.3	0.4	50					
10	0.5	0.3	0.4	40					
14	0.7	0.3	0.4	28					
16	0.8	0.3	0.4	25					
18	0.9	0.3	0.4	22					
20	1.0	0.3	0.4	20					
22	1.1	0.3	0.4	18					
24	1.2	0.3	0.4	16					
28	1.4	0.3	0.4	14					
20	1.0	0.4	0.5	20					
22	1.1	0.4	0.5	18					
24	1.2	0.4	0.5	16					
28	1.4	0.4	0.5	14					
32	1.6	0.4	0.5	12					
24	1.2	0.6	0.7	16					
28	1.4	0.6	0.7	14					
32	1.6	0.6	0.7	12					
36	1.8	0.6	0.7	11					
40	2.0	0.6	0.7	10					
42	2.1	0.6	0.7	9					
48	2.4	0.6	0.7	8					
50	2.5	0.6	0.7	8					
52	2.6	0.6	0.7	7					
50	2.5	0.9	1.0	8					
52	2.6	0.9	1.0	7					
64	3.2	0.9	1.0	6					
SPECIFY PLATING CODE XX=					13	91	93	99	
Sleeve (Pin) 					10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn/Pb	
Contact (Clip) 					30μ" Au	10μ" Au	30μ" Au	200μ" Sn/Pb	