

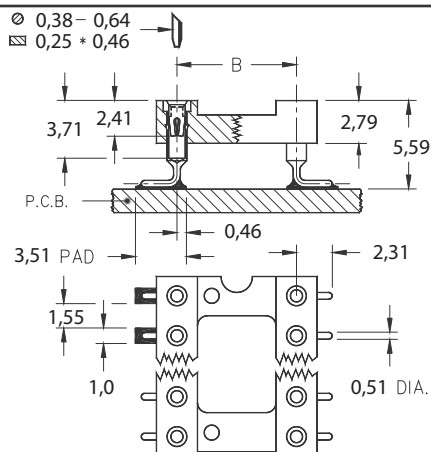


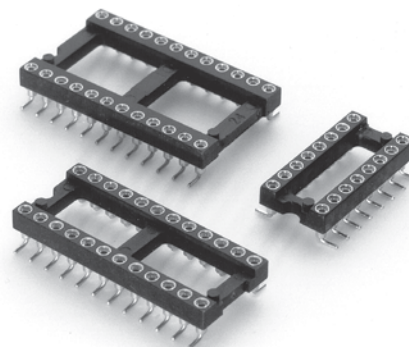

- For infra-red reflow and vapor phase soldering.
- Gull wing terminals for max. strength and easy in-circuit test.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 110 use MM #1005 pins. See page 135 for details.
- Insulators are high temperature thermoplastic.



Total number of pins				Quantity per tube	Ordering Information
	A	B	C		
10	12,6	5,08	7,6	40	110-XX-210-41-105000
4	5,0	7,62	10,1	102	110-XX-304-41-105000
6	7,6	7,62	10,1	67	110-XX-306-41-105000
8	10,1	7,62	10,1	50	110-XX-308-41-105000
10	12,6	7,62	10,1	40	110-XX-310-41-105000
14	17,7	7,62	10,1	28	110-XX-314-41-105000
16	20,3	7,62	10,1	25	110-XX-316-41-105000
18	22,8	7,62	10,1	22	110-XX-318-41-105000
20	25,3	7,62	10,1	20	110-XX-320-41-105000
22	27,8	7,62	10,1	18	110-XX-322-41-105000
24	30,4	7,62	10,1	16	110-XX-324-41-105000
28	35,5	7,62	10,1	14	110-XX-328-41-105000
20	25,4	10,16	12,7	20	110-XX-420-41-105000
22	27,8	10,16	12,7	18	110-XX-422-41-105000
24	30,4	10,16	12,7	16	110-XX-424-41-105000
28	35,5	10,16	12,7	14	110-XX-428-41-105000
32	40,6	10,16	12,7	12	110-XX-432-41-105000
24	30,5	15,24	17,7	32	110-XX-624-41-105000
28	35,5	15,24	17,7	28	110-XX-628-41-105000
32	40,6	15,24	17,7	24	110-XX-632-41-105000
36	45,7	15,24	17,7	22	110-XX-636-41-105000
40	50,8	15,24	17,7	20	110-XX-640-41-105000
42	53,3	15,24	17,7	18	110-XX-642-41-105000
48	60,9	15,24	17,7	16	110-XX-648-41-105000
50	63,5	15,24	17,7	16	110-XX-650-41-105000
52	66,0	15,24	17,7	14	110-XX-652-41-105000
50	63,5	22,86	25,3	16	110-XX-950-41-105000
52	66,0	22,86	25,3	14	110-XX-952-41-105000
64	81,2	22,86	25,3	12	110-XX-964-41-105000

RoHS
2002/95/EC

**XX= Plating Code
See Below**

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=			93			43 ◇	
Sleeve (Pin) 			5,08µm Sn/Pb			5,08µm Sn	
Contact (Clip) 			0,76µm Au			0,76µm Au	